49603-2

SCIENTIFIC AMERICAN

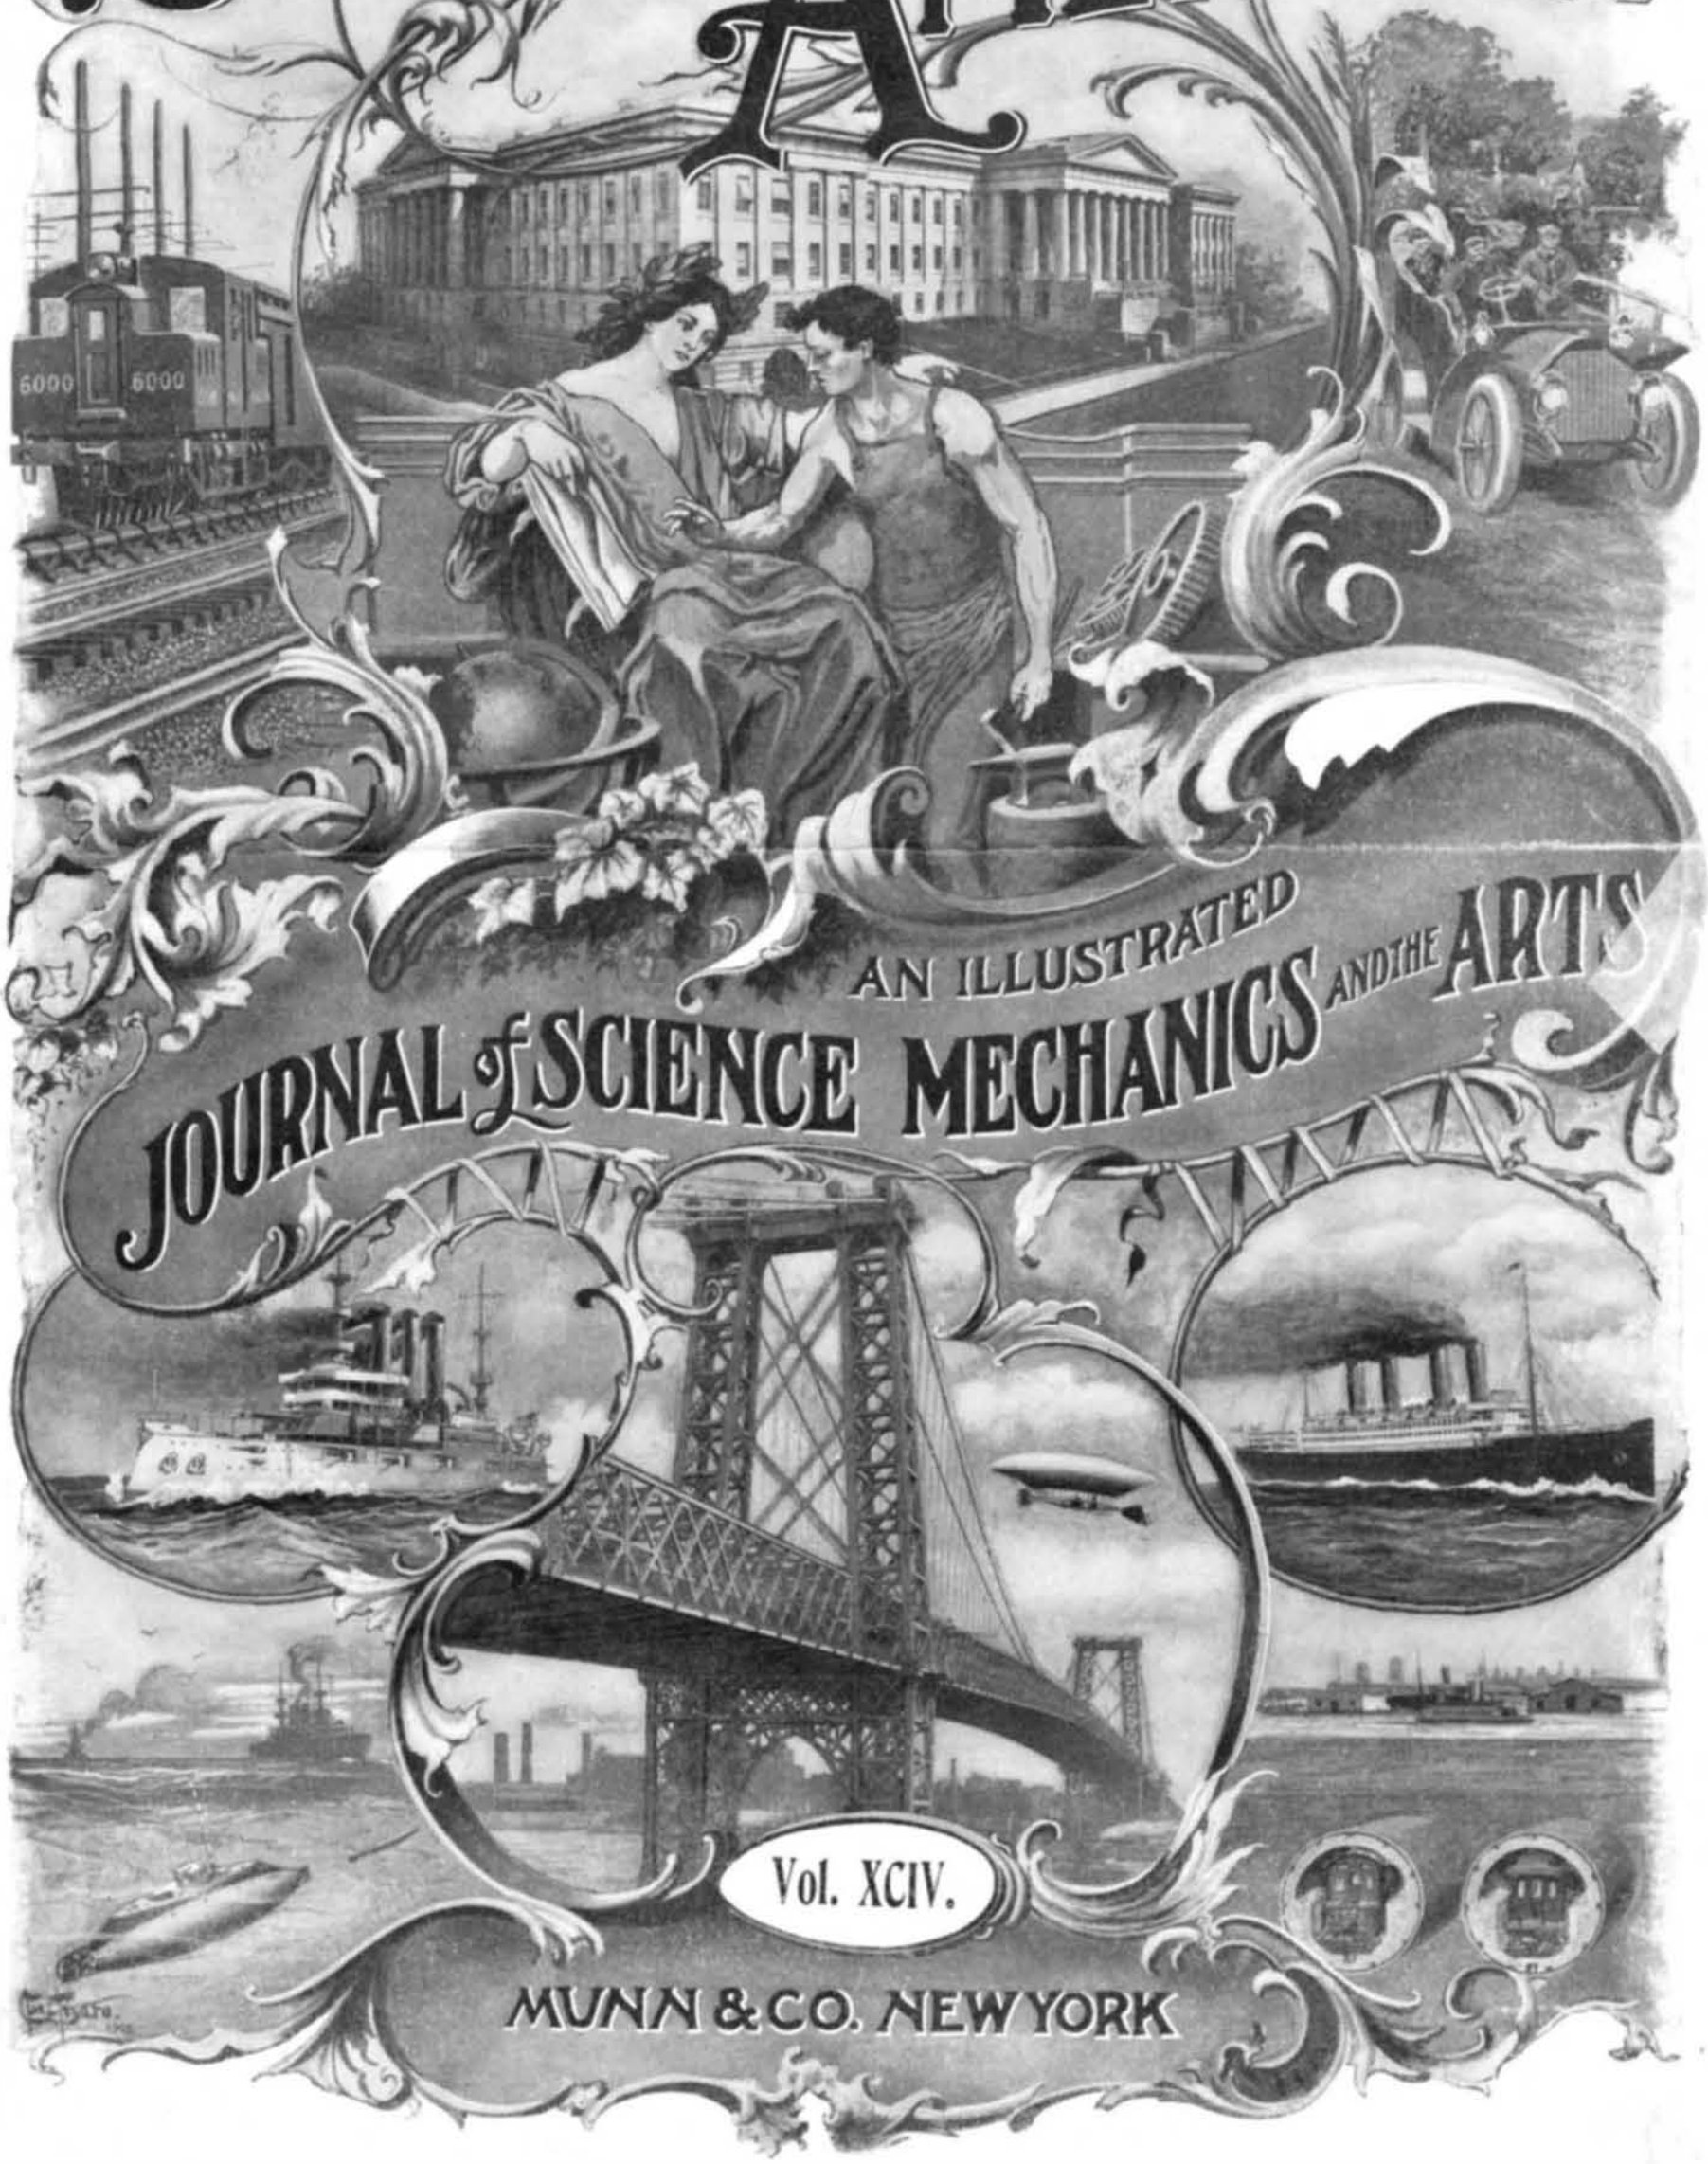

AN ILLUSTRATED

JOURNAL of SCIENCE MECHANICS AND THE ARTS

Vol. XCIV.

MUNN & CO. NEW YORK

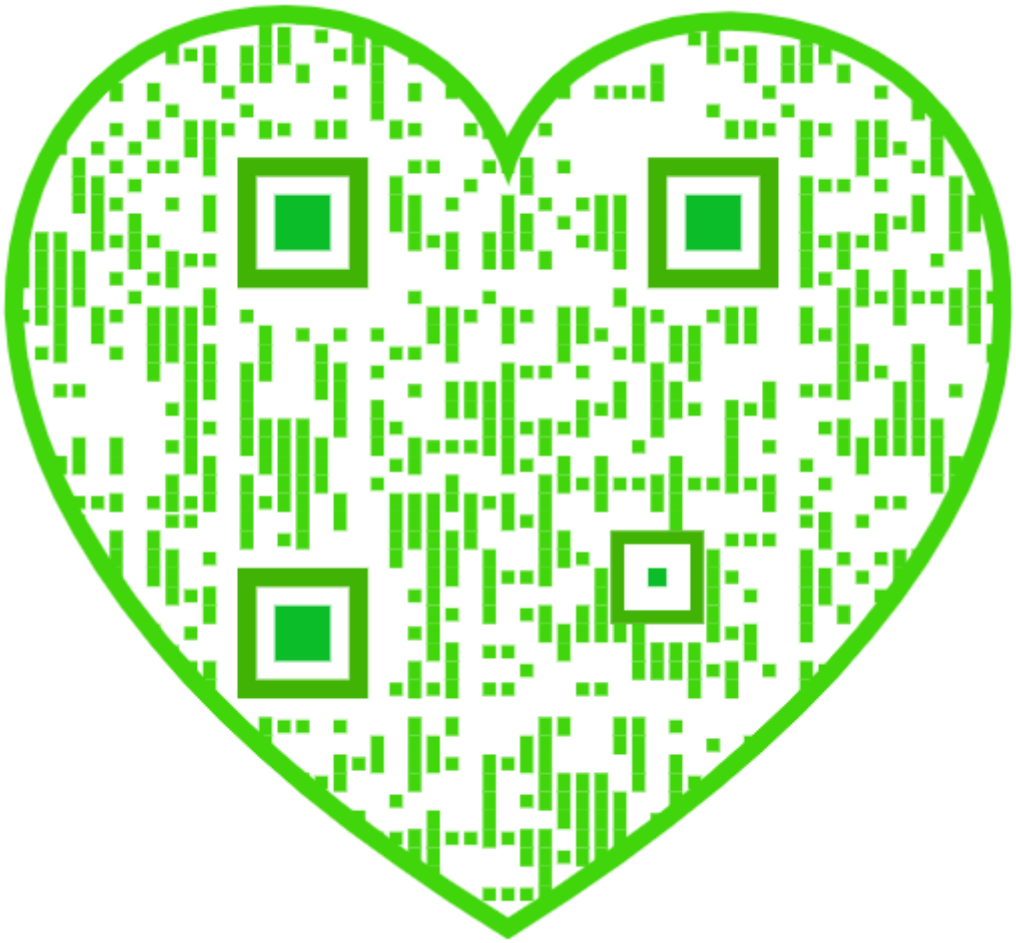

SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1906, by Munn & Co.]

Vol. XCIV.—No. 1.
ESTABLISHED 1845.

NEW YORK, JANUARY 6, 1906.

10 CENTS A COPY.
$3.00 A YEAR.

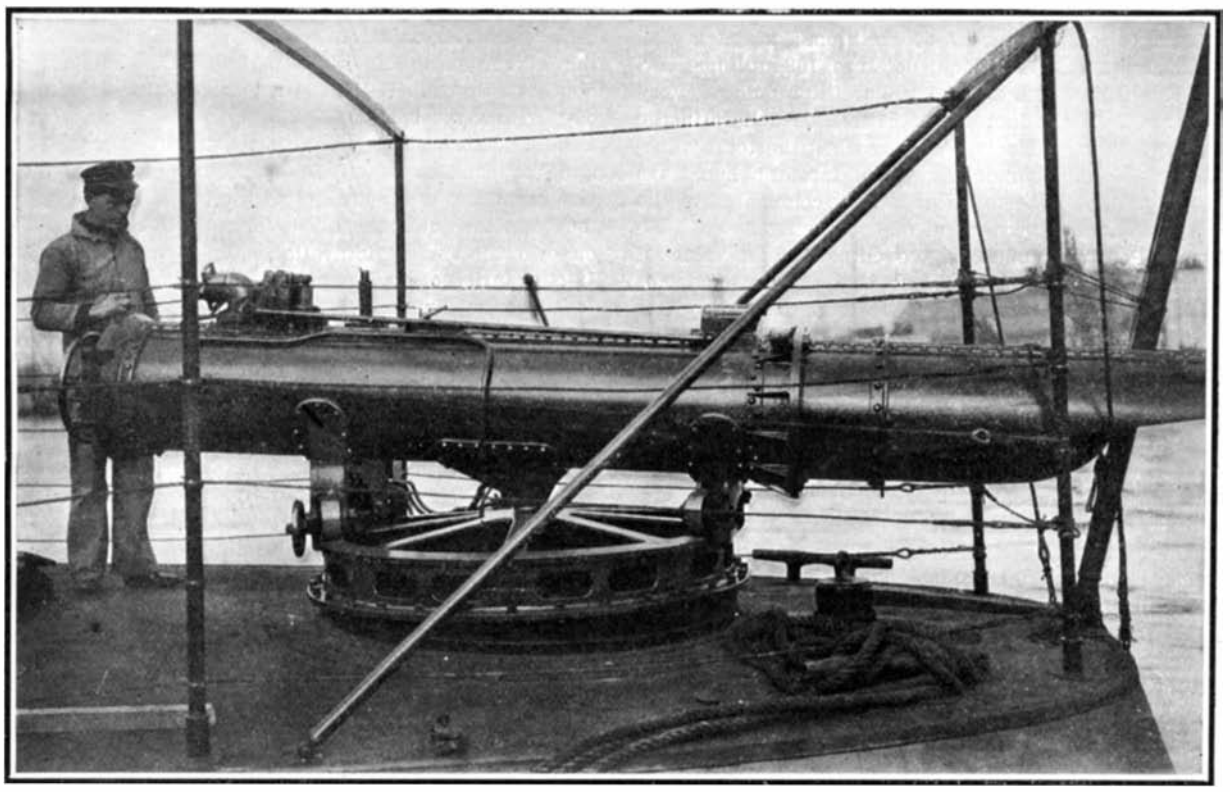

Torpedo in Tube Ready for Launching.

One of the Turbine Wheels.

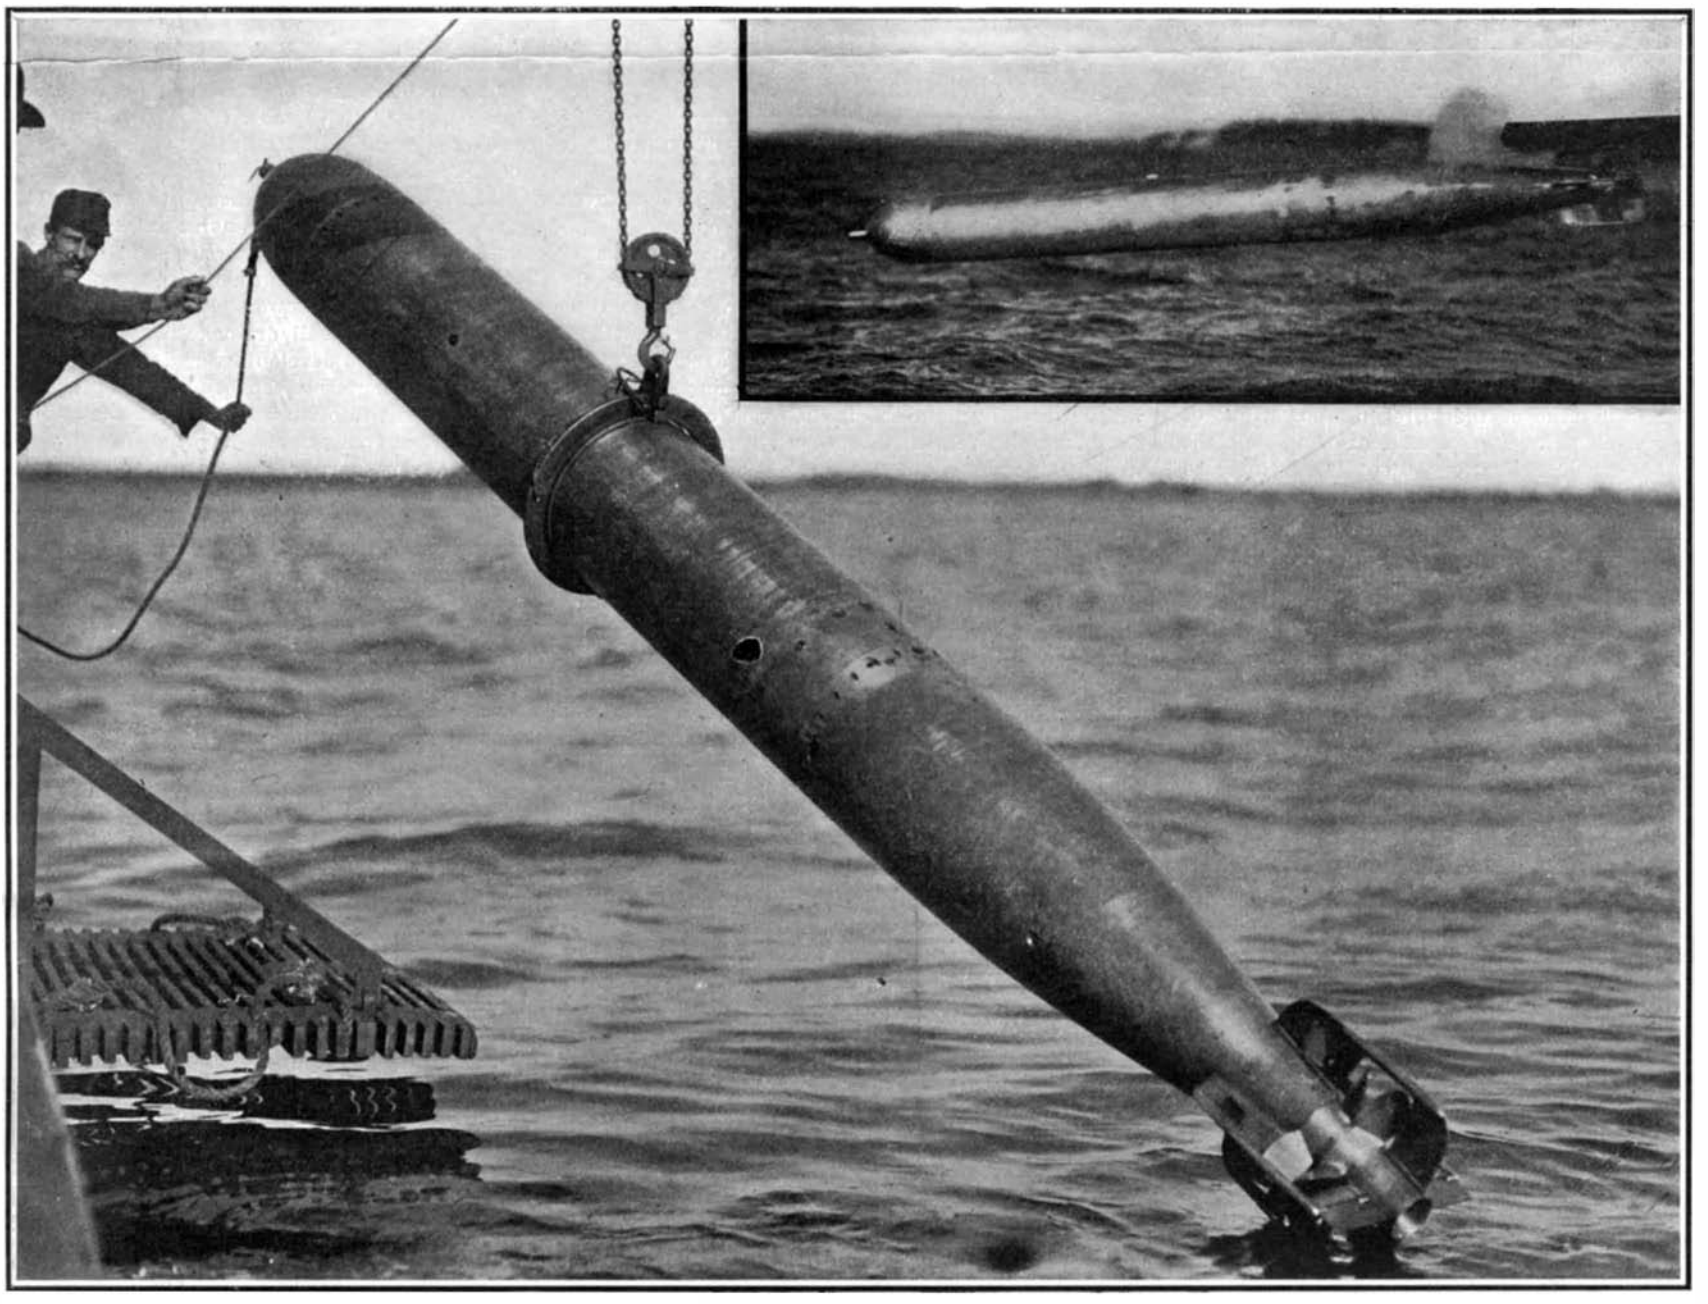

Torpedo in Mid-Air, as It Leaves the Launching Tube.

Hoisting a 21-Inch Torpedo Aboard After a Trial Run.

NEW 21-INCH TORPEDO FOR THE UNITED STATES NAVY. SPEED, 36 KNOTS AT 1,200 YARDS RANGE.—[See page 7.]

SCIENTIFIC AMERICAN

ESTABLISHED 1845

MUNN & CO., - - Editors and Proprietors

Published Weekly at

No. 361 Broadway, New York

TERMS TO SUBSCRIBERS

One copy, one year for the United States, Canada, or Mexico $3.00
One copy, one year, to any foreign country, postage prepaid. £0 16s. 5d. 4.00

THE SCIENTIFIC AMERICAN PUBLICATIONS.

Scientific American (Established 1845).....$3.00 a year
Scientific American Supplement (Established 1876) ..... 5.00 "
American Homes and Gardens..... 3.00 "
Scientific American Export Edition (Established 1878)..... 3.00 "

The combined subscription rates and rates to foreign countries will be furnished upon application.

Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, New York.

NEW YORK, SATURDAY, JANUARY 6, 1906.

The Editor is always glad to receive for examination illustrated articles on subjects of timely interest. If the photographs are *sharp*, the articles *short*, and the facts *authentic*, the contributions will receive special attention. Accepted articles will be paid for at regular space rates.

THE PASSING OF THE "OREGON."

And now it is the "Oregon" that has to go the way of all battleships, and pass from the first to the second line of defense, to do duty in home waters. This announcement will occasion not a little sentimental regret among the American people, who will ever bear in mind the long voyage of this battleship from the Pacific coast to Cuba, and the brilliant part which she played in the chase of the Spanish squadron on its flight from Santiago harbor. It seems but a few years ago that the ships of this class ("Oregon," "Indiana," and "Massachusetts") were heralded as the most powerfully armed and armored battleships afloat. The claim was well made; for not even the big British ships of that day could match the combination of four 13-inch and eight 8-inch guns and 18-inch face-hardened armor found in the "Oregon" class. Yet these vessels possessed inherent defects as naval design and construction advanced, which were bound to tell against them. Chief among these was the fact that their displacement of something over 10,000 tons was altogether too small to effectively carry such a powerful aggregation of offensive and defensive elements. For in order to float such guns and armor at all, it was necessary to keep down speed, coal supply, and the supply of ammunition, to a point which was bound ultimately to render these ships unable to remain in our first line of defense. The trend of later battleship design is in the direction of giving a ship high freeboard, large displacement, and a generous supply of ammunition and coal, and the increased displacement of about sixty per cent of such a vessel as the battleship "Connecticut" over the "Oregon" has been given mainly to these features. The main battery of the "Connecticut" in numbers and weight is no greater than that of the "Oregon," consisting of four 12's and eight 8's as against four 13's and eight 8's. In the secondary battery there is an increase from four 6-inch to twelve 7-inch guns. The vastly greater power of the broadside is mainly due to the great increase in velocity, range, rapidity of fire, and energy of the guns. The length of the ships has gone up from 348 to 450 feet; the breadth from 69 1-3 to 76 2-3 feet, while the depth, on the other hand, has been reduced from 28 to 26¾ feet, a most important advantage for the later ships. Displacement has increased from 10,288 tons to 16,000 tons, and the speed has risen from 16 knots to 18. The normal coal supply has risen from 400 tons to 2,000; and although the "Oregon" is credited with a bunker capacity of 1,450 tons as against 2,200 tons for the "Connecticut," she cannot take on that amount without practically submerging the whole of her water-line armor. In the second line of defense, however, for service in home waters, the "Oregon" still has a useful life of many years' service before her, and in the naval annals of the country she is destined to be placed high on the roll of honor.

WEALTH OF OUR FARMS.

In view of the vast increase that has taken place during the past decade in the number and wealth of our industrial establishments and in the value of our manufactured products, it will be surprising to many people to learn that our farms still greatly exceed in value and as a source of revenue every other source of wealth, not even excluding our great manufacturing enterprises. The wealth production of the farms of the United States reached in 1905 the highest amount ever attained in this or any other country, the total figure being nearly six and one-half billion dollars. Four of the crops reached new records as to value, namely, corn, hay, wheat, and rice. Corn exceeds previous yields both in amount and in price, and hay, wheat, and rice reached new figures as to value only. The general average of production was high in the case of every crop, and the prices ran higher still. The Secretary of Agriculture estimates that in addition to the enormous yield of wealth, the farms of the country have themselves increased in value during the past five years by over six billions of dollars; and he puts the matter dramatically when he states that with every going down of the sun during the past five years, there has been registered an increase of three million four hundred thousand dollars in the value of the farms of the country. An analysis of the principal crops for the year shows that corn reached its highest production with 2,708,000,000 bushels, a clear gain of 42,000,000 bushels over the very profitable year of 1899. The hay crop is valued at 605 million dollars; cotton at 575 millions; wheat at 525 millions; oats, 282 millions; potatoes, 138 millions; barley, 58 millions, and tobacco at 52 million dollars. Very remarkable is the increase of 54 million dollars in the value of dairy products, which reached the total valuation of 665 million dollars. The farmer's hen, says the Secretary, is becoming a worthy companion to the cow, the annual production of eggs being now 20 billions. Poultry products have climbed to a value of over half a billion dollars, so that poultry competes with wheat for precedence. The total value of horses is estimated at $1,200,000,000. There are over 17½ million milch cows, valued at nearly half a billion dollars. During the year farm produce to the value of 827 million dollars was exported. During the last sixteen years the domestic exports of farm products have amounted to 12 billion dollars, or one billion dollars more than enough to buy all the railroads of the country at their commercial valuation. Clear evidence of the prosperity of the farmer is seen in the fact that under a recent amendment of the national banking law, allowing the establishment of banks with a capitalization of less than $50,000, there have been 1,754 such banks established in the last year, nearly every one of which, says the Secretary, is located in a rural community and the capital furnished by farmers. For the first time in the financial history of the South, the deposits in that region exceed one billion dollars. Should there be no relapse from his present position as a wealth producer, three years hence the farmer will find that the farming element, which forms thirty-five per cent of the population, has produced an amount of wealth within the preceding ten years equal to one-half of the entire national wealth produced in three centuries.

SINGLE-PHASE LOCOMOTIVES ON DIRECT-CURRENT TRACKS.

The announcement that the New York, New Haven and Hartford Railroad intended to operate single-phase locomotives over the direct-current section of the New York Central lines, which lead into the new terminal station, elicited a strong protest from Mr. Sprague, the inventor of the multiple system of control. He expressed regret that the company had not adopted a system more in harmony with that which was being laid out at such vast expense by the New York Central, and his letter suggested that there would be certain difficulties of operation attending the introduction of the single-phase locomotive into the new terminal. In the course of a reply by the vice-president of the New Haven road, it is stated that the new electric engines ordered by his company are of the interchangeable type, and that they are expressly designed to operate under all practical conditions within wide limits. They will be able to use both alternating and direct, high-tension or low-tension alternating current, to take current from the third rail or from overhead conductors at heights varying between 14 feet and 22 feet; and to operate with equal facility on either or both of the two track levels at the Grand Central station.

It is stated by this official that on sections equipped for direct current the single-phase locomotives will operate in every respect as direct-current engines of high commercial efficiency, and on sections equipped for alternating current, they will show still higher efficiency. The public is assured that the adoption of this most flexible type of engine by the New Haven Company will introduce no new features or difficulties in the track equipment or operation of the Grand Central terminal, and will not entail upon the New York Central the necessity for the expenditure of an additional dollar nor the transposition of a wire.

Now, the above is all very good as far as it goes, which is not very far. If the event prove to be as good as the prediction, both the New Haven Company and the traveling public will be subjects for congratulation. The latter, and especially those New York commuters whose rare good fortune it has been to use the New Haven line, may be pardoned for their solicitude lest that company, in any steps that they might be taking that would affect their suburban service, were actuated more by considerations of their own profit than of the convenience of the traveling public.

WATER POWER AT HIGH PRESSURE.

One cubic foot of water per second, falling 1,000 feet, develops more than 11 horse-power.

This striking fact may well call attention to the great, undeveloped water powers in all of the mountainous sections of the United States. Hundreds of such powers now go to waste almost unnoticed, because of the common idea that a large volume of water is necessary where much energy is to be developed. As a matter of fact, many an unpretentious mountain brook expends enough power in grinding its rocky bed to turn the wheels of a great city.

Proof of this is easily reached by considering the figures for rainfall, runoff, and elevation that apply to large parts of the country. Take, for illustration, an annual fall of rain and snow that amounts to 36 inches of water on a level, and is generally reached in the higher parts of the New England, Middle, and Southern States. With this rainfall each square mile of territory receives 83,635,200 cubic feet of water annually. This water must either soak into the ground and reappear elsewhere in springs, or evaporate, or else run off over the surface of the ground, and a part moves in each of these ways. That portion which runs off over the surface is available for power production. If a quantity of water represented by a depth of one foot on a level runs off over the surface of the ground, each square mile furnishes 27,874,400 cubic feet annually. This volume of water develops some 86,700 horse-power hours, if allowed to fall 1,000 feet. On the assumption that the flow of water will be regulated, and used during only 3,000 hours per year, the runoff of a depth of one foot from one square mile will generate 28.9 gross horse-power during 300 days of ten hours each, under the conditions named. With any variation of the water head from 1,000 feet, the power will, of course, vary in like proportion. That is, a fall of 500 feet would develop 14.4 horse-power during 3,000 hours with the volume of water named, and a fall of 2,000 feet would yield 57.8 horse-power. So too the number of horse-power hours will vary directly with the total quantity of water available. The ratio of the volume of water passing down the bed of a stream to the volume that annually falls on its drainage area, known as the percentage of runoff, is very irregular in different cases, and ranges from less than one-tenth to fully seven-tenths. For many of the streams in the mountainous parts of the States along the Atlantic coast a runoff of 50 per cent is not too high. With an annual precipitation of 36 inches of water on a level, a runoff of 50 per cent gives a stream of 41,817,600 cubic feet of water per year from each square mile of its drainage area, or a discharge of 3.87 cubic feet per second during 3,000 hours. This rainfall and runoff combined with a fall of 1,000 feet thus yield about 129,900 horse-power hours for each square mile of drainage area. If this amount of energy is used at a uniform rate during 3,000 hours, it develops 43.3 horse-power. From these figures it may be seen that a small drainage area will often supply enough water to develop a very large power, if a head of 1,000 or more feet can be obtained. A small mountain stream will often have between one and two miles of drainage area per mile of length, even where located in a very narrow valley, so that the runoff from twenty to fifty square miles is available within a few miles of its source. With a drainage area of fifty square miles, the runoff on the basis of the above moderate assumptions would develop 2,165 gross horse-power during 3,000 hours per year, or 6,495,000 horse-power hours.

In order to make this energy available for useful work, there must in every case be a large storage capacity, because the fall of water is very irregular from day to day and month to month. Small streams in mountainous country often show maximum discharge rates that are twenty to fifty times as great as the minimum, and this great variation in the discharge gives such streams small value for power production, before a relatively large storage capacity is provided. Take, for illustration, the case assumed above, with a drainage area of fifty square miles and an annual runoff represented by a depth of 18 inches of water on a level over this drainage area. With most of the annual rainfall concentrated in the smaller part of the year, it might be desirable to provide a storage capacity for one foot depth of water on a level over the entire drainage area. This would mean the storage of fifty times 27,878,400 cubic feet of water, or 1,393,920,000 cubic feet. With an average depth of 20 feet in this reservoir, its area would be 2.5 square miles, or one-twentieth of the drainage area. Such a reservoir might involve only a moderate investment in a hilly country with deep valleys.

California and the entire Rocky Mountain region afford the best opportunities for the development of water power under high heads, because of the great changes in elevation there, and numerous examples of such powers are to be found in these sections. One such is the hydro-electric plant on Bear Creek that delivers energy to the 33,000-volt transmission that

runs to Los Angeles. At this plant the head of water is more than 1,900 feet, so that one cubic foot of water per second develops twenty gross horse-power. In Colorado, near Pike's Peak, an electric plant is operated with water under a head of 2,500 feet, which is believed to be the greatest in this country or the world, that has been developed. While such heads of water cannot, perhaps, be duplicated at developments in the East, numerous cities exist along the Appalachian chain of mountains, from Maine to Georgia, where water heads of 500 to 1,000 feet can be obtained for power plants. At a recent development in New England, a head of about 470 feet was procured for a pipe line some three miles long. The drainage area of the stream above the dam where the head of this pipe is located is only 15 square miles, and of this area the reservoir behind the dam covers 800 acres.

As there are 640 acres to the square mile, this reservoir covers 8.3 per cent of its drainage area. The storage capacity of this reservoir is 435,000,000 cubic feet, which represents a layer of water 1.01 feet thick on a level over its entire drainage area. In a case where the total drainage area is 24 square miles, the storage reservoirs cover 1,120 acres and have a combined capacity of 498,000,000 cubic feet of water. The generating station where the runoff from this 24 square miles is utilized under a head of 222 feet has a capacity of 1,600 kilowatts. Plans for a plant in the Berkshire Hills of Massachusetts, not yet built, show a water head of more than 800 feet.

THE DEVELOPMENT OF THE CAPITAINE PRODUCER-GAS MARINE ENGINE.

The application of the Capitaine producer-gas marine engine, the possibilities of which have been demonstrated in a very practical manner by the Thornycroft Shipbuilding Company, is being extensively developed in Great Britain. So far the utilization of this system of generating power has been confined to small vessels, the Thornycroft Company having only completed arrangements with the inventor to this end. The rights to manufacture and apply the invention to large vessels have been acquired by Messrs. Beardmore & Co., Ltd., who are carrying out some interesting experiments to this end.

This firm has under construction an installation of 500 horse-power, and this is by far the largest engine of this type that has been so far undertaken. Under these circumstances the construction of such an engine presents several problems that have not had to be encountered in the case of the smaller-powered plants. Yet there is a great opening for this type of engine, not only for propelling purposes, but for auxiliary machinery purposes, especially where weight of machinery and economy in coal consumption are of vital importance. The total weight of such an engine is about 75 per cent of the ordinary engines and boilers, while the fuel consumption is 50 per cent less.

This 500-horse-power plant will comprise five cylinders of the vertical type, working on the Otto cycle principle, and fitted with a suction gas producer specially designed to work continuously with ordinary bituminous coal. The framing of the engine is of plate steel exclusively with the exception of the cylinders, which are the only large parts of cast iron. By means of this design a rigid yet light construction is obtainable.

The builders have also designed a new type of reversing gear, which possesses several interesting and novel features. This gearing will enable the engine to run in either direction and dispense with feathering propellers, bevel gearing, and so forth for reversing. The gas producer is also being arranged so as to supply the engines with gas free from tar, and is to be fired by a mechanical stoker so designed as to prevent the formation of clinker when using bituminous coal.

When this engine is completed, it will first be submitted to exhaustive and severe trials on land under conditions resembling as near as possible those obtained at sea. If they should prove satisfactory, it will then be installed upon a Glasgow coasting steamship, and the firm will then proceed with the construction of an engine of 1,000 horse-power, for which the designs have been prepared, but the construction of which has been postponed until the results of the 500-horse-power engine have been obtained, so that any disadvantages or weak points that may develop may be eliminated from the larger engine. The engine now in hand will be completed and tested within the next two months.

That there are great possibilities for this system of generating power is evidenced by the practical interest that is being shown in the invention by the British Admiralty, who are also constructing a high-powered engine at Manchester, and which will also be subjected to a series of severe trials by the naval engineers. If the invention can be proved to be as successful in the larger sizes as it has been in smaller craft, it has a great future as the power generator in large vessels, and especially in bucket dredges and towing craft, where a maximum of power is desired at the minimum of expense, both as regards initial cost, space occupied, weight, and economical coal consumption.

HYBRIDIZATION OF PLANTS.

BY W. R. GILBERT.

It is a singular fact that it is only during the past century that hybridization, or cross-breeding of plants, has been practised.

Lord Bacon, more than 300 years ago, seems to have foreshadowed it, but it was generations before anyone attempted to solve the mystery.

Lord Bacon wrote: "The compounding or mixing of plants is not yet found out, which if it were, it would be one of the notable discoveries, for so you would have great varieties of fruits and flowers yet unknown."

Who was the first to cross a fruit or flowers we have no data to prove, but Mr. Knight, of Chelsea, England, was very much interested in, and practised the art of hybridization. When the secret was found out the practice soon became common, and some enthusiastic amateur horticulturists engaged in it. Since then the art of hybridization has been followed by many, and, as Bacon suggested, greatly improved and unknown varieties of fruits and flowers have been produced in rich abundance.

Perhaps in the amelioration of fruit it has been important, now marvels of the hybridist's skill are crowding upon us, and they seem to accomplish their aims with a certainty that is remarkable—for instance, in the case of the stoneless plum which Mr. Burbank, of California, after twenty-five years of study and experiment has been able to give to the world, and now the coreless apple of Mr. Spencer. It has taken these gentlemen years to accomplish the object they had in view, but to raise a new grain, fruit, or flower or vegetable of greatly superior qualities is worth a lifetime of patient and persevering effort, because it contributes to the welfare of the human race, and the comfort of the lower animals.

Cross-breeding is the most important, useful and fascinating branch of horticulture and sometimes very remunerative.

In order to obtain a new variety it is only necessary to exercise some judgment, and select two parents of certain qualities which are of the same, or of very closely allied species, and cross them for a new intermediate variety, which will blend the good points of both, and thereby effect an improvement; thus an early, but insipid pear, if crossed with one of fine flavor, but lacking the desirable qualities as to habit of growth or productiveness, will be likely to bring a variety which in some essential points will surpass either of its parents.

The "Goe's Golden Drop" plum was raised by crossing the Green Gage with the Magnum Bonum plum; the Elton cherry was raised by crossing the Byarrean with the White-heart, and the combinations have produced the two invaluable fruits mentioned.

The power to cross-breed is limited by a wise provision of nature to prevent the generation of monstrosities. A cross-bred plant is a sub-variety raised between two varieties of the same species. Some nearly allied species are capable of fertilizing each other and these are pure hybrids or mules, and, like animals so bred, are incapable of producing perfect seed. No one has ever succeeded in causing the pear to fertilize the apple, or the gooseberry the currant. Before people were so well informed on these subjects as they now are it was believed that wonders could be brought about by fertilizing an orange with a pomegranate or a red rose with a black currant, but these fancies are no longer accepted as being possible.

Now, as to the *modus operandi* of the artificial crossing of plants. Take the blossom of a cherry, for an example, which is directly connected with the embryo seed; the numerous surrounding threads are the stamens at the summit of which are little sacks which secrete the powder called pollen. The pistil has its base in the embryo fruit and at its summit is the stigma; the pistil is also called the style, and is the stalk or tube between the ovary and the stigma; on this stigma is a sticky substance, when it has arrived at maturity, to which the pollen adheres and thus the seed is fertilized. Now, if we fertilize the pistil of one flower with the pollen of another we shall obtain a variety with the characteristics of both parents.

The process of obtaining cross breeds is easily performed. When the tree blooms, which we intend to make the mother of the improved race, we select one of the blossoms not fully expanded; with a pair of sharp scissors we cut off the antlers or pollen sacks. As soon as the blossom is fully expanded, collect with a camel-hair brush the pollen from a fully blown flower taken from the tree we intend to be the male parent. Apply the pollen, and leave it upon the point of the stigma. It is safe to cover the flower thus operated upon with a bag made of thin gauze to prevent insects getting beforehand with us in applying the pollen. To sum up, the two essential points are: First, to be very careful to remove the antlers before they are sufficiently mature to have fertilized the pistil; second, to apply the pollen when it is in perfection, that is, dry and powdery, and when the stigma is moist and in condition to assimilate it. Seedless fruit is produced by removing the pistil before it has been pollenated, so that the fruit will form and contain but few if any seeds, and by selecting those which have the least seed and repeating the process in course of years seedless varieties will be the result.

SCIENCE NOTES.

For the purposes of studying the causes of sorotchte or mountain sickness, and the influence of the temperature and climate of high altitudes upon general nutrition, two eminent French medical authorities, Drs. Guillemard and Moog, during last July made a stay at the Mont Blanc observatory with the astronomer M. Janssen. According to the results of their investigations the diminished tension of the oxygen of the atmosphere clogs the process of oxidation, and this sets up an elaboration of toxic substances, the retention of which causes symptoms of autointoxication and accounts for the symptoms of mountain sickness. Acclimatization, however, results in a few days, and the symptoms pass away under circumstances resembling those accompanying the passing of the crisis in infectious maladies.

In the northern hemisphere the greatest cold seems to have been observed at Werchojansk, in Siberia, where it is stated that the thermometer goes down as low as —69.8 deg. C. However, according to the information which has been brought by the Russian artist Borrissoff, certain parts of Nova Zembla seem to show at least as low a temperature as the above. The Bulletin of the Société Astronomique states that in an excursion which M. Borrissoff made lately in the Strait of Matotchkin, he discovered underneath a case a box containing two thermometers, one a maximum and the other a minimum-recording thermometer. It is supposed that these instruments belonged to Höfer, an Austrian geologist, who made an expedition to this spot in 1872. One of the thermometers was found to have registered the temperature of +15 as a maximum, while the second instrument showed that the greatest cold had been —70 deg. C. This value seems to be the extreme cold which has been reached in this region for thirty years past.

The variations in the thickness of the hair upon the same individual have been studied by the Japanese scientist Matsura and he makes some interesting observations. It is known that in certain diseases we find among other differences of growth, very marked variations in the growth of the finger nails both in length and thickness. It is found that the hair is also influenced, and all the affections which act upon the general health bring about a diminution in the thickness of the hair. The medullary layer may even be interrupted and the hard layer which it contains may disappear. Observations made upon a hair will therefore show the variations in thickness according to certain maladies and the length of the affected part or the thinner portion of the hair gives an idea of the duration of the malady, and even of slighter affections. The variations are naturally more strongly marked in the case of coarse-haired races than for others. Provided the hair had never been cut, the subject would have his pathologic history written, so to speak, in capillary terms.

A new process for the manufacture of hydrogen gas has been brought out in Europe not long ago, and is designed to replace the usual method of sulphuric acid and iron or zinc. In the new process the reaction of the alkaline hydrates upon metaliic aluminium is utilized. This reaction is $2Al+3NaOH = 3H+AlO_3Na_3$. When once commenced, the metal is attacked by the soda solution with great energy. The gas is produced very rapidly and the liquid heats up to the boiling point. Theoretically we need 0.810 kilogramme of aluminium and 3.6 of caustic soda to produce 1 cubic meter of hydrogen, but in practice owing to the impurities in the metal and the soda, we require 4.68 kilogrammes of caustic soda. The process gives some advantage as to saving in material which is to be transported, seeing that we need but 5 kilogrammes of material per cubic meter of gas, while the acid process takes 7 kilogrammes. But the cost of production is much higher and comes to at least $0.72 per cubic meter. This process was used by the Russian aerostatic corps during the recent war.

An interesting effort to apply the Parsons turbine to locomotive propulsion is being made by Mr. Hugh Reid, a well-known British locomotive engineer. This inventor has designed a self-contained electrical locomotive, which will generate its own current by means of a boiler and a condensing Parsons turbine. He has also devised an air-cooled condenser of somewhat novel design for use with the same, and the forthcoming experiments with this locomotive are being anticipated with great interest by British engineers.

A NEW DETERMINATION OF THE QUITO ARC OF THE MERIDIAN BY THE FRENCH GEODETIC COMMISSION OF ECUADOR.

BY JACQUES BOYER.

At its meeting at Stuttgart, in 1898, the International Geodetic Association decided upon a redetermination of the arc of the meridian measured in Peru by La Condamine, because the improved scientific methods and instruments of the present day permit the various elements from which the dimensions of the earth are deduced to be determined with greater accuracy than was possible in the eighteenth century.

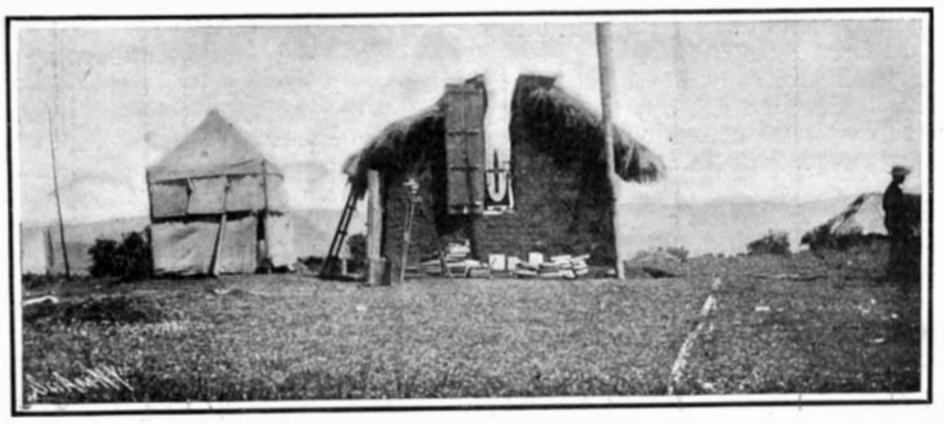

The Astronomical Station at Tulcan.

Terminal Monument of the Riobamba Base.

The United States offered to perform the work if France, to which nation it properly belonged, should decline to undertake it. Naturally, however, the government of the French republic felt bound, in honor, to continue to play its historical rôle and sent to Ecuador Capts. Maurain and Liacombe, who explored the Cordilleras from southern Colombia to northern Peru (July to November, 1899).

In their report they showed that this region, which is crossed by two high parallel mountain ranges, is admirably well adapted to the establishment of a meridional chain of triangles, with apices formed by peaks, taken alternately from the two Cordilleras.

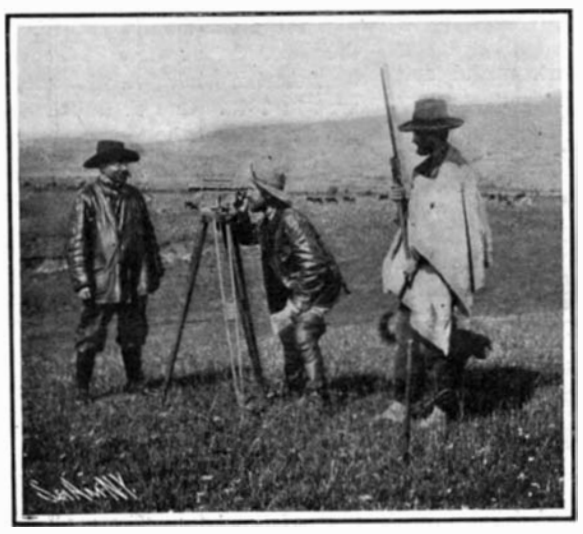

Leveling the Tulcan Base.

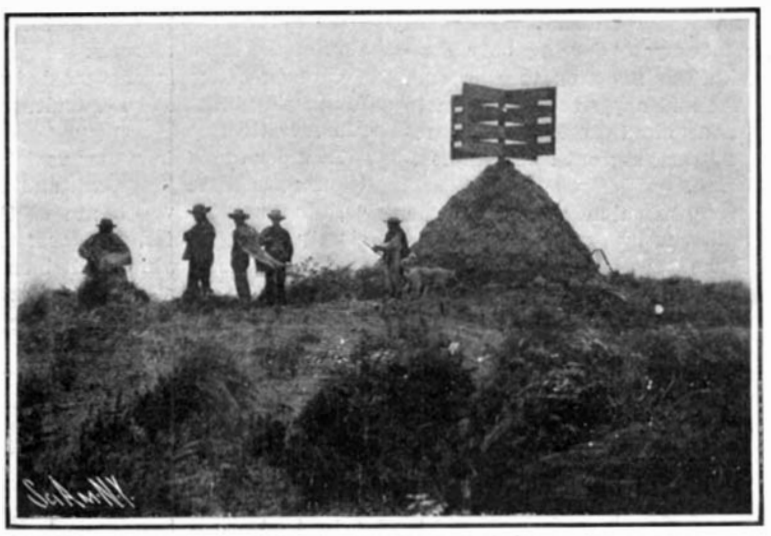

A Geodetic Monument in the Cordilleras.

Finally, after a report by M. Poincaré and an appropriation by the French parliament, the task was confided to the geographical service of the French army. On December 9, 1900, the vanguard of the expedition, commanded by Capts. Lallemand and Maurain, started for Ecuador, and on June 1, 1901, the main body landed at Guayaquil with twenty tons of scientific apparatus, which had to be carried, mainly on mule-back, over bad roads to the pass of Chimborazo, more than 13,000 feet above sea-level. A month later the little geodetic caravan, by order of Col. Bourgeois, had reassembled at Riobamba. The accompanying photographs give an idea of the life of the detachment on the Andean plateau. A few tents, equipped with rudimentary furniture, scattered about, a portable house for the observation pier and azimuth circle, and some rather primitive kitchen apparatus completed the camp. The work of the expedition was arranged in the following manner: First came the fundamental geodetic and astronomical operations, including the measurement of the base line, the determination of the latitudes of the stations at the center and the ends of the arc, and the measurement of certain differences of longitude, for example, between the principal station at Riobamba and the observatory at Quito. The measurement of angles and bases of verification was reserved for the following years (1902-1905). In addition, in order to obtain the exact altitudes of the stations, it was necessary to run a careful leveling survey from one of them to the sea. The programme of the expedition also included geological studies, the collection of topographical data for a reconnaissance map on a scale of 1 to 200,000, based upon a very exact triangulation, and a study of the native tribes, and the fauna and flora of Ecuador by Dr. Rivet.

The determination of the fundamental base, about 10 kilometers long, at Riobamba, was not made without difficulty. The surveyors arranged along the selected alignment a series of microscopes whose axes coincided exactly with a vertical plane passing through the extremities of the base, and then observed a bar, 4 meters in length, through each pair of microscopes in succession. The bar really consisted of two parallel bars, one of copper and the other of platinum, the difference of expansion of which indicated the surrounding temperature and, consequently, afforded data for the reduction of the observations to zero. The wind and the blinding, sandy dust raised by it compelled the observers (Capts. Perrier and Liacombe) to begin work very early in the morning and to stop at one o'clock in the afternoon. They were able, however, to advance the bar about ninety times each day, thus measuring a length of 360 meters, with an error not exceeding one part in 450,000. The same base was afterward measured twice with the more practical and less cumbrous Jäderin apparatus of metal wire.

Meanwhile, Capt. Maurain set monuments on the peaks near Riobamba, and Col. Bourgeois determined the difference of longitude between Riobamba and Quito by means of telegraphic signals exchanged with M. Gonessiat, of Lyons, who had installed himself in the observatory at Quito. This observatory was built by the government of Ecuador a few years ago but is yet unprovided with observers!

After the completion of these operations the geodetic expedition separated into several divisions, while Col. Bourgeois returned to Paris whither he was recalled by his duties in the geographical service of the French army. In consequence of the rebellion then in progress in Colombia, it became necessary to abandon the northern part of the proposed arc and to seek a new terminal astronomical station and a new base in Ecuador.

Capt. Lallemand made a reconnaissance of the Carchi country, built a temporary observatory near Tulcan and selected the plateau of San Gabriel de Tusa for the location of a base, which he measured four times with the Jäderin wires, with the assistance of Capt. Perrier and Dr. Rivet.

These operations were conducted with difficulty and nearly always in the rain. After bravely acquitting himself of this fatiguing task, Capt. Lallemand finished the construction of all the monuments of the northern section of the arc, while Capts. Maurain and Perrier determined the latitudes of the two end stations, the southern one at Paita, Peru, and the northern one at Tulcan, Ecuador, and thus fixed the length of the arc of the meridian at 5 deg. 53 min. 33 sec.

From this time onward the French officers, divided into three groups, devoted themselves to secondary geodetic observations along the line from Tulcan to Paita, passing through Riobamba and Cuenca. Capt. Perrier occupied the northern stations of Troya and Mirador (3,500 and 3,800 meters above sea level), while Capt. Maurain and M. Gonessiat operated in the center and Capt. Liacombe in the south. Soon afterward all these observers returned to France after having completed the redetermination of the Quito arc. In the course of their five years' labor they were forced to surmount all sorts of obstacles, from the inclemency of the weather to the hostility of the natives, who destroyed the monuments.

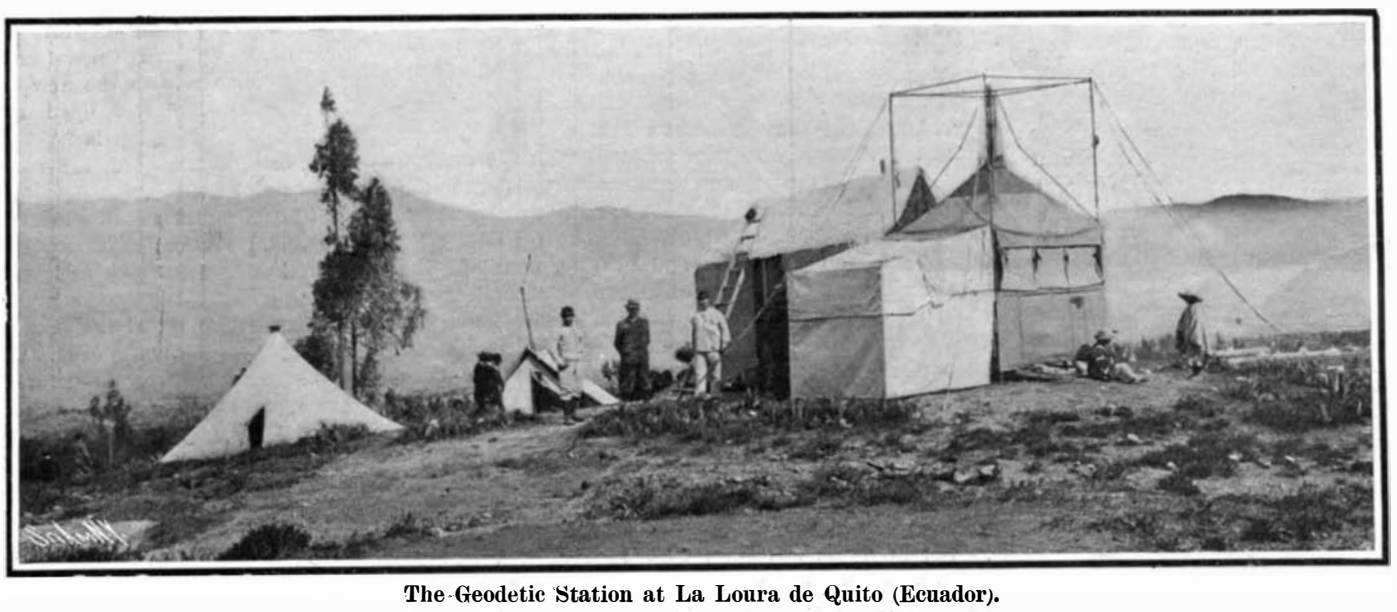

The Geodetic Station at La Loura de Quito (Ecuador).

A NEW DETERMINATION OF THE QUITO ARC OF THE MERIDIAN BY THE FRENCH GEODETIC COMMISSION OF ECUADOR.

The following is a typical example of these difficulties. Because of fogs, ten weeks were consumed at Mirador in making observations which could be made in less than a week in France. In this work, therefore, not only were scientific knowledge and experience of the utmost importance, but the participants in the labors of the expedition had to possess patience, perseverance, and courage.

THE NEW TURBINE TORPEDO OF THE UNITED STATES NAVY.

It is always difficult to ascertain just what other navies are doing in torpedo work, because special secrecy is maintained with regard to what is still considered to be one of the deadliest forms of naval warfare; but the new turbine torpedo, known as the Bliss-Leavitt model, which has recently been adopted by the United States government, furnishes the American navy with what is probably the speediest and most effiective weapon of the torpedo type in existence.

The readers of the SCIENTIFIC AMERICAN have been made familiar with the Whitehead torpedo of the standard type. The new weapon conforms, in its external appearance and in the leading features of its internal subdivision and method of control, to the Whitehead, but in size, power, speed, range, and accuracy it far surpasses it. The Whitehead of the standard type as used in the United States navy has a speed of 28 knots and a range of about 1,200 yards, and about 22 knots at 2,000 yards. The new torpedo has a range, guaranteed by contract, of 3,500 yards, and its speed is 28 knots at this range and 36 knots at 1,200 yards range. The United States government has been so well satisfied with the new weapon that contracts, amounting to several millions of dollars, have been awarded for the construction of this type of torpedo, which, from this time on, will be the only type used in the navy. Two sizes are being made: one, 18 inches in diameter, which can be fired from the existing 18-inch tubes on our battleships and torpedo boats; and the other, a much larger and more powerful torpedo, 21 inches in diameter. The 18-inch torpedo of the new type has an effective range of 2,000 yards and a speed of 33 knots, and 100 of this type have been contracted for, while of the larger 21-inch, 300 are called for by the contract. Thirty of the 18-inch and two of the 21-inch have been delivered at the torpedo station at Newport, where officers and men are instructed in torpedo work under probable war conditions.

By the courtesy of the Bliss Company our representative was recently given an opportunity to study the construction of the new torpedo in the special department of the works set apart for torpedo work. The new 21-inch type consists essentially of three sections. First, the head containing the explosive; then the central flask in which the compressed air for driving the torpedo is stored; and last, the after body, which contains the turbine for operating the propellers, the immersion chamber for regulating the depth of the torpedo beneath the surface of the water, and the gyroscope gear by which the torpedo is automatically steered and maintained on its proper line of flight.

The head is a beautiful specimen of hammered sheet-metal work. It is formed in two halves, divided longitudinally, the edges of the joints being made with a square, saw-tooth form and brazed together. The war head, which, as distinguished from the practice head, is used only in actual hostilities, is loaded with 132 pounds of gun-cotton, containing 25 per cent of moisture. The gun-cotton is packed in disks through the center of which is a hole that contains a cartridge primer of dry gun-cotton for detonating the charge. The small propeller carried at the extreme point of the torpedo is for preventing premature explosion, which it does by locking the firing pin. When the torpedo enters the water, the revolution of the propellers releases a sleeve, which uncovers the firing pin, putting it in position to strike the detonating primer the instant that the torpedo finds its mark. The central body, or shell of the torpedo, occupies a little more than one-half the total length. It is made of a special forged steel of an elastic limit of at least 90,000 pounds. The rough forging is over 1¼ inch in thickness, and it is bored and turned down in the lathe to a finished thickness of 7-16 of an inch.

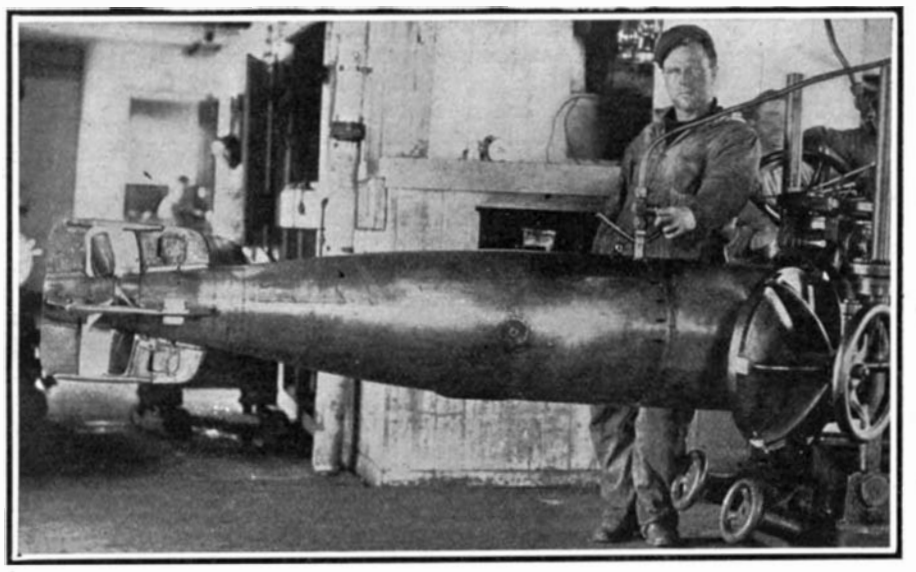

Note the two 4-bladed propellers; the two vertical steering rudders; and the horizontal submergence rudders.

The Tail of the Torpedo.

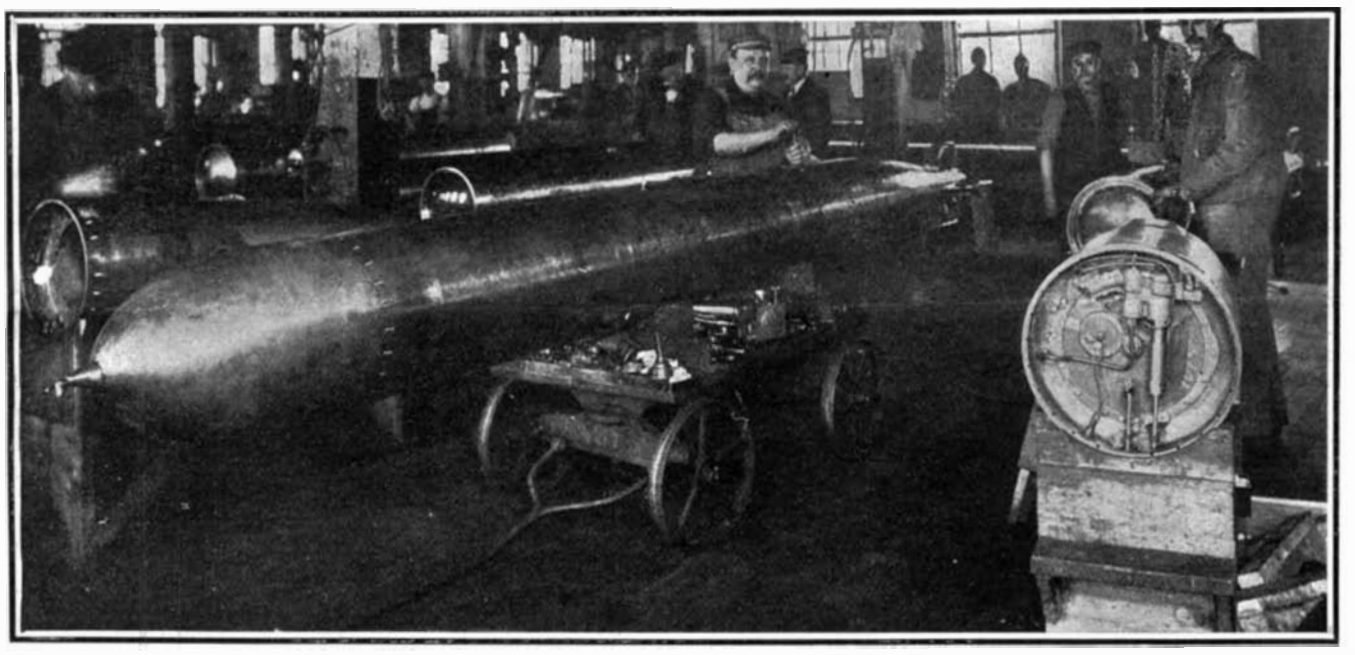

The small propeller at the head by revolving releases the firing pin as soon as torpedo enters the water. To the right is seen the principal valve group.

A Completed 21-Inch Bliss-Leavitt Torpedo.

The "flask," as the central portion, or air chamber, is called, is to the turbine engine of the torpedo what the boiler is to the reciprocating engine of a steamship. It is charged at an initial pressure of 2,225 pounds to the square inch.

The after portion of the torpedo, or the tail, contains in its forward end the wonderful little torpedo engine which drives the propeller. It is of the Curtis compound type, and consists of a central row of fixed blades and two wheels, one 11⅛ inches and the other nearly 12 inches in diameter. There are two propellers, adapted to run in opposite directions, one being fixed upon the central shaft, and the other upon an enveloping outer shaft. The turbine runs at a speed of about 10,000 revolutions per minute, which is reduced by suitable gears to a speed of 900 revolutions for the propellers. At this speed the turbine developed about 160 horse-power, the corresponding speed being 40 knots an hour, although the contract speed required by the government is only 36 knots.

Immediately astern of the compartment containing the turbine is the wonderfully ingenious and delicate apparatus for maintaining the proper depth of immersion and for steering. The regulation of the depth is effected by means of a vertical diaphragm, on one side of which is the water, which is allowed to enter by holes provided in the shell for that purpose, and on the other side a series of coiled springs, the water pressing against the diaphragm on one side, and the springs pressing the diaphragm in the opposite direction on the other side. The springs are adjusted so that their pressure shall exactly equal the pressure of the water at the given depth at which the torpedo is to travel. If the torpedo descends below that depth, the water pressure, overcoming the spring pressure, pushes the diaphragm inwardly. If the torpedo is above the desired depth, the springs overcome the water pressure, and push the diaphragm outwardly. The center of the diaphragm is attached to certain levers and rods, which pass through the tail of the torpedo and act on a pair of horizontal rudders, throwing them up or down, according as the diaphragm is pressed inward or outward, and thus correcting the deviation of the torpedo from the horizontal plane at which it is designed to travel.

Astern of the immersion chamber is located the steering gear. This is a modification of the principle employed in the Obry gear, and depends upon the well-known tendency of a gyroscope to maintain itself in its original plane of rotation. The Obry gear was given its high velocity by means of a coiled spring which was released at the moment of firing. In the Bliss-Leavitt torpedo the spring is dispensed with, and a small reaction turbine is used in its place. This consists of a disk with a series of discharge orifices arranged tangentially to the circumference, which are fed with compressed air. The air rushing from the orifices reacts on the disk, and turns it exactly in the same way as did the pipes on Hero's original turbine of two thousand years ago. If the torpedo tends to deflect to the right or to the left, this little gyroscope turbine maintains its original position, and its angular motion with regard to the torpedo (or to speak more accurately, the angular motion of the torpedo about the gyroscope) serves to actuate a very ingenious mechanism, which turns the vertical rudders to the right or left, and corrects the deviation. The turbo-gyroscope is driven at a speed of 18,000 revolutions per minute.

Of course, the most interesting feature in the building of the new torpedoes is the construction of the wonderfully efficient little turbine engine that drives them. The Bliss Company has designed a very effective

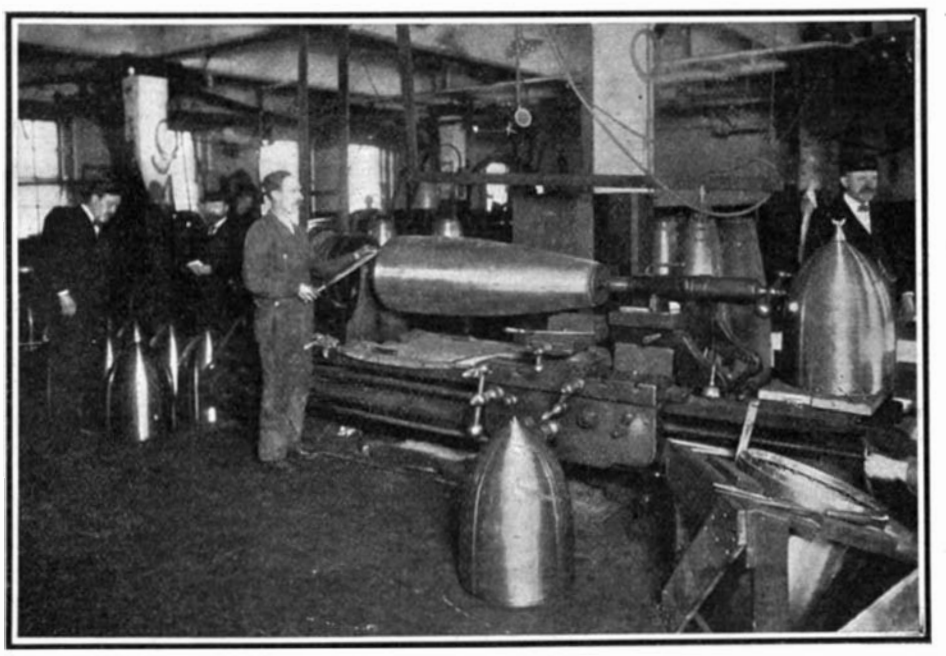

A finished warhead is shown on the bed of the lathe. It carries 132 pounds of gun-cotton.

Tail of Torpedo in the Lathe. Finishing the Joint.

THE NEW TURBINE TORPEDO OF THE UNITED STATES NAVY.

machine for cutting the buckets of the turbine wheels. The whole wheel is made out of a single disk of steel, the buckets being integral with the wheel. The machine for cutting the buckets resembles a double-spindle lathe. The work is held in a horizontal position on the tail stock, and two cutters alternately advance toward the rim of the wheel, make a cut of the desired curvature and recede, leaving the wheel free to revolve sufficiently to bring the next bucket into position for another cut. One cutter operates on one wall of the bucket, and the other on the opposite wall. The result is a wheel of perfect form, carrying a highly finished surface. It should be mentioned here that the remarkably high efficiency in speed and range of the new torpedo is due to the use of a superheating process applied to the compressed air. This consists of a flame which is automatically ignited, the instant the torpedo is launched from the tube, and which burns during the entire run. The compressed-air flask contains a burner or pot, the flame of which is fed automatically with alcohol. The flow is so regulated that an even and steady temperature is maintained in the air flask.

During the past few months, the company has been carrying out a series of very exhaustive tests on board the proving steamer "Sarah Thorpe," which is anchored in the secluded waters of Noyak Bay, near Sag Harbor, Long Island. Here each torpedo is tested and brought up to the required standard of efficiency in speed and range before being turned over to the torpedo station at Newport. The Navy Department assigned a lieutenant and several gunners to witness and record the run of each torpedo. The target is a submerged net, 100 feet in length, which is located 1,200 yards from the point of fire. The torpedo breaks through the meshes, and after each shot the net is hauled up, and the exact striking point is located by the tear in the net. The maximum deviation in the range allowed is 15 feet to the right and left of the bull's eye, and 30 inches above and below at five feet of depth. Each torpedo must come within these measurements in three out of five trial runs, in order to be accepted. The average speed of the run is 36 knots, and the time run is about 60¾ seconds for 1,200 yards. The cost of the 18-inch torpedo is about $5,000, and the 21-inch torpedo costs proportionately more.

Preserve Your Papers; They Are of Permanent Value.

By taking a little trouble, when a paper first comes to hand, it may be preserved to form a permanent and valuable addition to the reading matter with which everyone should be supplied. We furnish a neat and attractive cloth board binder, which will be sent by mail, prepaid, for $1.50. It has good strong covers, on which the name SCIENTIFIC AMERICAN or SCIENTIFIC AMERICAN SUPPLEMENT is stamped in gold, and means by which the numbers may be securely held as in a bound book. One binder may thus be made serviceable for several years, and when the successive volumes, as they are completed, are bound in permanent form, the subscriber ultimately finds himself, for a moderate cost, in possession of a most valuable addition to any library, embracing a wide variety of scientific and general information, and timely and original illustrations. Save your papers.

The Current Supplement.

Jacques Boyer opens the current SUPPLEMENT, No. 1566, with an interesting article on the truffle industry in France. Excellent illustrations accompany his text. The manufacture of rosin oils is thoroughly discussed by E. Rabaté. Sepia watertone papers, simple to work and cheap, can easily be made by the amateur photographer, if he follows the method outlined in the current SUPPLEMENT. Notwithstanding the fact that much of the music produced by chimes is rendered with discords, a peal of bells always finds ready listeners. The late George M. Hopkins describes in a painstaking article how an electric chime may be made by any one at a comparatively small expense. Major Ronald Ross, to whom we owe the discovery that mosquitoes are purveyors of malaria, has computed the number of mosquitoes which infest a given area. The method which he pursues is very carefully set forth. Curves in pattern work is the subject of an article which must be of interest to the foundryman. In a very brief and yet comprehensive article Mr. E. F. Chandler tells how to construct an electro-thermostat. The telemobiloscope is the invention of a German scientist. Its purpose is to discover the nearness of one vessel to another at sea during foggy weather, in order to avoid collisions. The invention is described and illustrated.

The Poisons of an Egg.

M. Gustave Loisel, in a paper recently read before the Academie des Sciences, describes some experiments he has been making in regard to the toxicity of certain glands of different animals, vertebrate and invertebrate, and also finds the same result in the case of eggs. He uses in this case eggs from the duck, chicken, and turtle. As to the toxicity of the duck's egg, he makes the following experiments: First, relating to the venous injection of yolks of the eggs which are emulsioned in distilled water. By injecting this emulsion into the veins of rabbits, he finds that seven adult animals are killed by 8 cubic centimeters of the yolk on an average. The animals die in a variable time, from some minutes to two hours, showing at first a contraction of all the members, followed by paralysis. Second, the injections were made with extract from 21 yolks of eggs dried and reduced to powder, extracting with salt water. Using 10 grammes of this powder, treated to 100 cubic centimeters of salt water (1 per cent) then filtered, the solution caused the death of three rabbits when injected into the veins in the proportion of 80 cubic centimeters per kilogramme weight of the animal. Chickens' eggs have about the same effect, but in a somewhat less degree, while turtles' eggs (from the Mauritanian tortoise) have a greater effect, especially for the mature ovules taken directly from the ovaries. Not only does the yolk cause the rabbits to succumb with convulsions and tetanic contractions, but the albumen forming the white of the turtle's egg has an equally powerful effect. Sub-cutaneous injections have the same action. In the case of the yolk, a series of check experiments was made, using an emulsion of oil and salt water, but this had no effect upon the rabbits.

AUTOMATIC WATERING POT.

Our article, with its illustrations, concerning an automatic apparatus for watering plants, recalled to Mr. M. M. Moore, a subscriber, a device which he used upon the suggestion of a "forty-niner."

A few years ago Mr. Moore lived upon a small ranch,

AN AUTOMATIC WATERING POT.

where the only water supply was a small well. In order to have a few plants and flowers, he gathered a number of tin cans—tomato, corn, etc.—cut out the top so that it held by an inch or so, bent it back, so that it could be nailed to a stick, punched a very small hole in the bottom, through which he drew three or four inches of cotton cloth or string, drove the stick near the plant he wished to water, so that the can was eight or ten inches above the ground, filled the can with water, and then drop by drop the water fell upon the ground near the plant all day, sometimes all day and night. The ground soon became saturated, the plant throve, and the quart of water did as much good as an all-day rain.

The accompanying sketch will give an idea of the device.

A New Ozone Apparatus.

The ozone apparatus for medical use which are employed at present do not always work perfectly, as they are more or less influenced by the state of the weather, and besides, the ozone which is produced is often mixed with combinations of gases, nitrogen, ammonia, also phosphorus or metallic oxides, which result from the contact of the ozone and the metallic poles when a too dense charge is produced. To overcome these difficulties, M. Breydel, a Belgian scientist, brings out a new process in which the electric discharge is obtained between plates of large surface which have a special insulating coating. In this way he prevents the spark discharges and the volatilization of the metal at the electrodes. He finds that when above 20 degrees C. the ozone tends to be transformed to oxygen, and thus the amount of ozone depends upon the temperature and also the degrees of the ozonized gas. For this reason he uses poles which are placed in a medium having a somewhat low temperature. The air is well dried before going into the apparatus. A funnel-shaped opening allows of making inhalations, placing the face some eight inches off, or a narrow opening can be used, for local treatment. The ozone can also be passed through liquids, where needed. The new apparatus gives a much larger quantity of ozone than can be obtained by other forms, and it has a great advantage in not being influenced by the weather.

Engineering Notes.

Shipping circles in Great Britain are closely interested in a new experiment in ship construction that is being carried out in a shipbuilding yard on the northeast coast by the inventors of the turret ship, which is now such a popular type of freight vessel. This boat is being constructed without beams and is practically an application of the cantilever principle to shipbuilding. Instead of the beams crossing over the hold, stout stanchions are raised nearly flush with the sides of the vessel and, when these have been brought to a certain height, equally strong diagonal joists are raised from them to the upper decks, thus forming a bracket or cantilever at each side. The stanchions and joists closely follow the lines of a turret ship and thus take up little room. The advantages of this design are that the vessel has a lighter draft in proportion to dead weight, while at the same time it gives greater freedom for shipping long and bulky goods.

Propeller design with the turbine is more difficult than with the reciprocating engine, because the conditions are entirely different from those which have hitherto obtained, and there is so little experience with propellers running at speeds of over 1,000 revolutions a minute in the case of small ships, or at 500 to 750 in the case of large ones. The Cunarders' propellers, it is understood, are to be limited to 180 revolutions per minute. For it must be remarked that in spite of the fact that we now have very clear and logical rules for the design of propellers under existing circumstances logically worked out, nevertheless these rules and formulæ came after the experience rather than before. This matter, however, can undoubtedly be cared for, and when more experience has been gained the design of propellers will be as easy for existing conditions.

Of the various materials used for lagging, magnesia may be considered one of the best and most practicable for use in connection with locomotive service. This composition is of a strict neutrality, and composed of inert mineral matter that will exert no chemical action, corrosive or otherwise, upon any metallic surface with which it may be brought in contact. It will remain unaltered under all conditions of heat and moisture which confront the coverings of locomotive boilers. It has qualities of lightness, firmness, structural strength and porosity, the latter quality especially, upon which depends largely the efficiency as a non-heat-conductor; and this quality being most pronounced in magnesia, it affords the greatest resistance to the transmission of heat. It can also be molded into sectional blocks of any form and size desired for ready application and removal.

As a superintendent of motive power a generation ago, a good mechanic sufficed. He was an old locomotive runner, or a shop foreman promoted, and he was usually called "master mechanic." It was but a short and comparatively easy step from the locomotive, or the shop, to the position of head of the department. In the present day of record-making, of heavy locomotives, large-capacity cars, strenuous operation, large shops and intricate labor problems, such a step is now a hopelessly long one. The sort of man who successfully directed the department twenty-five years ago would find his ability overtaxed to properly manage a single busy roundhouse to-day. A different kind of ability is now required to direct the mechanical department of a single progressive road, and as great roads combine into systems still another new kind of a man will be needed. He must soon be ready, for his work is even now waiting. Is this appreciated? Are the men being prepared?

An interesting new machine has been installed at the yards of the well-known British shipbuilding firm of Messrs. Beardmore & Co., Ltd., for bending ship beams. The general practice of rounding deck beams is by means of powerful hydraulic pressure applied section by section to the member for which the camber is required. With this new appliance, however, the beams are bent and completed with the greatest rapidity notwithstanding their dimensions or caliber. The machine consists essentially of rollers which are set vertically and can be made to suit any degree of camber or curvature. These rollers operate upon the steel beam just as it arrives from the steel-works. It passes quickly through the machine, and is then ready for working into the hull of the ship for which it is intended, the beam being quite completed when it leaves the bender. Any type of beam can be handled, from the heaviest to the lightest, and angle or T-shape, with equal facility. The apparatus is being utilized for cambering the T-beams, 12 inches deep, required for the British battleship "Agamemnon" now in course of construction by this firm.

Correspondence.

A Word from an Old Reader.

To the Editor of the SCIENTIFIC AMERICAN:

After an acquaintance with the SCIENTIFIC AMERICAN of over half a century, I feel like expressing my indebtedness to it for its many excellent features. I read it weekly from the first page to the last, including the advertisements, and am always struck with its versatility and grasp of the subjects it handles. The editorial page is remarkable for its accurate forecasts, and orthodox mechanical analyses when commenting upon engineering matters. I am apt to be a sharp critic in this direction, for, having had more or less to do in this line for over sixty years, I have come to insist upon exact expressions upon such subjects, instead of vague surmises timidly put forth. If I had a young son I should give him the SCIENTIFIC AMERICAN as a safe guide in physics in general; the illustrations are germane to the subjects and very much assist the reader to see all sides of the topic discussed. After reading your paper continuously I do not think any young man would be apt to say, when asked what his lecturer talked about in the morning: "It was the sub-acetate of something—but I forget what." If a youth cannot learn much that will instruct him from the SCIENTIFIC AMERICAN he must be obtuse. I will close by wishing more power to you, and many years of usefulness in your especial field.

EGBERT P. WATSON.

Elizabeth, N. J., December 13, 1905.

Lubricating the Underwater Surface of Ships.

To the Editor of the SCIENTIFIC AMERICAN:

A correspondent in your issue of December 23 puts forth what seems to be an excellent idea with reference to lubricating the underwater surface of ships by air bubbles driven down a tube by means of a force pump.

It strikes me, however, that the air pump would not be needed. Would not a series of tubes passing down the bow, opening just above the water line in front, and at various points under the ship, serve the same purpose? Of course, when the ship was at rest, the water would fill the tubes to the same level as outside. But when the vessel was in rapid motion, the motion would create a suction that would empty the bottom of the tubes, and the vacuum thus produced would be filled with air that would rush in at the top of the tubes. This air in its turn would instantly be drawn out by the suction and distributed under the vessel, and thus a continuous air cushion would be formed upon which the vessel would glide forward as if floating in air, with far less resistance than would be caused by the friction of the water. At least, it seems so to me, and that your correspondent is right.

Then, if over one or more of these tubes was placed a can of kerosene with a small perforation at the bottom, the dripping of the oil would be drawn down the tube and prevent the formation of barnacles, as your correspondent suggests, and still farther lessen the friction by the glutinous coating it would produce.

E. P. FOSTER.

Cincinnati, Ohio, December 25, 1905.

Electric Propulsion for Inland Waterways.

To the Editor of the SCIENTIFIC AMERICAN:

I have not seen the suggestion from any quarter as to the use of electricity generated by the turbo-electric or gas-electric systems for the propulsion of craft on our inland waterways. To my mind this is a field rich in possibilities for future development.

There are a few advantages arising from this use of power:

1. More energy from a given amount of coal than by old methods, which saving admits of greater speed to the boat, or a greater freight-carrying capacity.

2. There would also be certain advantages in the arrangement of the boat's machinery. The energy being conveyed to a motor directly connected to the shaft of the propeller wheel by wire eliminates friction, thereby saving power, and makes possible a greater latitude in the application of the power. Two or more side wheels on each side, or both stern and side wheels simultaneously, could be readily used. This would have a beneficial effect in permitting a reduction of the draft without a corresponding loss of power, always an advantage on river craft. On towboats power thus generated could be conveyed by wire to barges having propeller wheels, arranged alongside of the tow, giving great propulsive effect as well as adding much to the manageability of the tow. These motor barges could have wheels on one or both sides at will. This suggestion may have value also as regards ocean towing, for from one engine room power might be conveyed to several barges trailing behind the towing vessel.

3. Another distinct advantage of the use of electric propulsion would be in the centralization of responsibility in maneuvering the boat. The pilot would have absolute control of the power independently of the engine room, a very apparent advantage. Wheels could be started, backed, or stopped with no more effort than is now required to ring up the engine room, a point of vast importance in the management of a boat on a river.

4. Lastly, passenger boats could be so constructed that they could be backed with great ease. By the simple movement of a lever the control of the boat could be shifted to a pilot house in the stern, and a landing could be made without the delay of "rounding to" which is so annoying an incident of a journey *down* a river.

J. LOGAN IRVIN.

Americus, Ga., December 9, 1905.

The Mosquito Theory of Yellow Fever.

To the Editor of the SCIENTIFIC AMERICAN:

The question recently propounded through the SCIENTIFIC AMERICAN by William F. Wilson, M. D., impressed me as quite apropos to the subject of yellow fever, especially this one: "Where is the inceptive—in the man or the insect? Is there not a commencement?" The proposition that the mosquito is the sole cause has always appeared to me as very much unfounded. They say a mosquito, before it can transmit the germ, must first bite an infected man. Now, whence comes the first infected man? That is, the very first, and no guessing allowed. They have demonstrated that mosquitoes do transmit the germ—but to the conclusion that nothing else does would seem a very long, foolish jump.

They may say that bogs and filth are not unhealthy; they do say this of bogs. It is simply an absurd subterfuge to uphold the very picturesque theory that the mosquito is the sole cause. They even hold that impure water conveys no malarial germs, but admit it might convey typhoid. This looks technical. They have declared war on the mosquito, and it seems like they are sinking all other considerations and defenses before it. S'death to the mosquito! Drink impure water! Eat impure food! Neglect sanitation! There is no Devil but Mosquito!

As an evidence of the unhealthfulness of low lands, take notice of persons living on such (even in river towns and cities). They are never so healthy as those living on higher ground. And this holds true in the winter, when the mosquitoes are dead. Do they continue their wickedness after death? Will the learned doctors never let up on the *Anopheles* and *Stegomyia?*

Well, then, what is your theory? It is this: The bogs and the filth and the mosquito are three causes; there may be others. Dr. Wilson suggested another idea: "If filth is not a factor, why the preliminary cleaning up?" etc. The fact is, there are doctors so imbued with the beauty (?) of the "mosquito theory," they argue that filth is no factor. Doubtless, in New Orleans, there were some of these, of high standing, of like persuasion. Consequently, there was little, if any, cleaning up, with the natural result of a severe scourge of yellow fever. This will happen again and again so long as the ridiculous idea of the mosquito being the sole cause of yellow fever is not uprooted.

L. P. PALMER.

Paducah, Ky., November 30, 1905.

Build the Canal at Sea Level.

To the Editor of the SCIENTIFIC AMERICAN:

I have been a constant reader of the SCIENTIFIC AMERICAN for many years, and have been interested in no series of articles which you have published more than those on an isthmian canal. The pains you took to obtain accurate information regarding the two projected routes, Nicaragua and Panama, and the clearness and perseverance you exercised in placing these facts before the public, were admirable, and should be acknowledged through all coming time by a grateful country.

I have been further profoundly interested in the late discussion about a sea-level canal. There is no question in my mind of the ultimate necessity of the sea-level type for that famous waterway, nor is there any question concerning the wisdom of its present adoption. The judgment of the foreign members of the expert commission ought to settle that in the public mind, as the American members could not but be, though unconsciously, influenced by the fear that our people would not sanction the added cost immediately; and this I say with all due belief in their professional sense of honor. The present construction of a lock canal, and a later change to sea level, entails an excessive cost in time, money, and annoyance incidental to the change. My family once lived in our house while it was being raised and a new story built underneath us, and you don't catch me submitting to any similar ordeal again or advocating anyone else doing so, not even the directors of a public canal. We have got to pay the bills for a sea-level canal some day, and by far the cheapest and best way is to incur those bills now.

Where shall we get the necessary funds? We are bordering on bankrupt expenditure in our feverish desire to have the biggest navy in the world, and can wisely and should determinedly retrench along this line. The building of ships whose known effective service will be for but five years, and the extreme limit of whose life is but twenty years, should be wisely limited. Money so saved will go far toward the extra cost of the canal. The country's prosperity will do the rest. A well-built canal, properly cared for, will last for all time. The devotion which the predominating elements of this nation have shown, are showing, and are likely to show, in advancing the interest of mankind in general is worth more for our protection and peace than all the navies of the world combined. The same may be said of every nation which exalts itself by intellectual attention to truth of all kinds. For the latest proof of this doctrine recall the battle of the Sea of Japan. Houses are needed to live in, but their chimneys don't need to be tall enough to knock down the stars. Navies are needed for police duty, and may do some service as scarecrows, but it is not necessary that, bow to stern, they should form a cordon entirely around our coast. To be sure, we need the canal at the earliest practical moment, but we need to exercise patience quite as much, and we need thoroughness and business prudence even more. Let us cultivate these virtues.

GEORGE B. KILBON.

Springfield, Mass., November 21, 1905.

Some Interesting Experiments with Acid and a Coiled Spring.

To the Editor of the SCIENTIFIC AMERICAN:

A number of years ago I had occasion to do some work on a motor, the motive power being derived from a coiled spring, which in this case was coiled in a barrel. It was run down, and the larger part was expanded tightly against the barrel. I used common muriatic acid to clean the motor, applying it with a small piece of cloth. While cleaning the barrel, an ominous clicking attracted my attention, seeming to come from the spring inside. Investigation showed that the acid, which I had taken no special precaution to keep from the spring, trickled through it more or less, causing it to crack and snap, in probably a hundred pieces, in lengths from half an inch up. I saw at once the spring was ruined, and as it was quite interesting to me, I, after a while spent in watching the peculiar demonstration and it had got quieted down a little, applied a little more acid, when it would at once start up again. This spring was two inches wide, and quite heavy. The only part that was affected, however, was the outer part, which pressed with all its strength against itself, and against the barrel. A few inner convolutions were not at all affected, there not being strain enough on them, probably.

This episode proving so interesting, I did a little experimenting. Snipping some pieces from an old clock spring, then after bending it between thumb and finger to get a good strain on it, I immersed the bent portion in the acid. Simple contact with the acid was sufficient to cause the piece of spring to snap violently, scattering the acid in all directions. Taking a piece of a smaller spring, about a quarter of an inch wide and two inches long, and after bending it between thumb and finger, to the shape of the letter U, simply wetting the *outside* with the acid, at the bend only, would cause it to snap at once. By holding a piece in the acid a few seconds, and then attempting to bend it, the same result was obtained.

Putting a piece under the same tension by bending as before, then applying the acid to the *inside* of the bend, brought no disastrous results. The acid was applied with a match, care being taken not to allow it to run over the edges, thus wetting the outside.

A piece which was twisted to quite an extent, then held in the acid, showed no ill effects. Not enough strain on it, probably. In fact, pieces of different springs were not all alike as regards their sensitiveness. This I accounted for by assuming they were not of the same temper, or the same degree of hardness. The treatment had no effect on annealed springs.

Perhaps these experiments may help settle the coiled spring question as to what becomes of the energy, etc. My answer would be that the energy is there all right, and when the attempt is made to dissolve the spring or eat it up with acid it would make itself manifest.

These experiments were made about forty years ago. Since that time I have seen the question, What becomes of a coiled spring's energy? asked many times, I think a few times in the SCIENTIFIC AMERICAN in years gone by. Perhaps here is a good place to say that we have had the SCIENTIFIC AMERICAN in the family since the early fifties.

CHARLES D. MOWRY.

Middletown, Conn., December 23, 1905.

A test of the McLean automatic gun was made from the deck of the United States revenue cutter "Mohawk," some 30 miles off Sandy Hook. The gun is a one-pounder. From 75 to 100 rounds were fired very successfully, it is reported, and the distances ranged from 1,000 yards to three miles. In the trial the gun, weighing but 540 pounds, was mounted on a tripod. There was no apparent recoil to the gun, it is said, when fired at the rate of 100 shots a minute.

THE CAVITÉ DRYDOCK.

BY DAY ALLEN WILLEY.

The tests of the floating drydock designed by the United States government for service in the Philippines have proved so successful, that the craft is now on its way to Cavité.

Since its completion it has been lying in Chesapeake Bay off Solomon's Island. Here an opportunity has been given to thoroughly demonstrate its capacity for docking not only vessels, but to dock itself. In each trial the drydock has performed service up to the requirements of the specifications. The vessels selected for the tests were the new cruiser "Colorado" and the battleship "Iowa." The reason for docking a ship of each class was to determine the strength of the dock by different distributions of weight upon it. It may be needless to say that the "Colorado" is considerably longer than any of the battleship class, being more than 500 feet.

Consequently, the weight of the "Colorado," though much more, was distributed over such a greater length of the dock that the strain upon it as indicated by the deflection was considerably less than when the battleship was lifted from the water; but as already stated, the deflection was no more than the calculations of the engineers—in fact, was not as great as that for which allowance had been made.

At the time she was placed in the dock the "Colorado" represented 13,300 tons displacement. In allowing the ship to enter the dock the latter was sunk to a draft of 29 feet over the keel blocks. The cruiser was then placed in position, the pumping machinery set in motion, and the dock lifted until a freeboard was provided of 2½ feet. In this position the ship was carried during a period of twenty-four hours, measurements being taken from time to time to ascertain the exact effect of the weight upon the dock structure. When the greatest freeboard had been attained, the total deflection upon the 500 feet of keel line of the dock supporting the vessel was found to be but one-quarter of an inch. At the end of twenty-four hours the total deflection was 1 1-16 inches. But after the ship had left the dock, the keel line straightened until no deflection was apparent.

While the "Iowa" represented but 11,600 tons displacement, the docking of this ship was probably a more severe test, not only by reason of the weight resting upon merely a portion of the dock, but on account of the length of time the ship was held in position and the height of the freeboard. The latter was no less than 4½ feet, while the battleship remained in the dock forty-eight hours. During this trial the total deflection of the keel line at the time when the "Iowa" had attained the greatest freeboard was two inches. At the end of twenty-four hours the deflection had increased to four inches, but strange to say at the end of forty-eight hours the dock had actually straightened until the deflection was but 3⅜ inches. After the ship had again entered the water, an examination of the keel line showed a "hog" or bulge measuring about an inch, which in twelve hours had changed to the sag of about a half inch.

The most interesting of the tests by far, however, was the docking of the center section of the structure by utilizing the pontoons at either end. To clearly explain how this remarkable engineering feat was made practicable, a brief explanation of the adjustment of the pontoons should be given. As readers of the SCIENTIFIC AMERICAN are aware, the main pontoon is no less than 316 feet over all, each end pontoon being 170 feet over all. The ends of the main pontoon overhang the smaller ones, each of the latter having an outside independent side wall high enough to allow it to be sunk and hauled under the center structure, literally fitting around the center on the same principle as the familiar collapse or telescopic box. When the three sections of the dock are connected and in service, the connecting elements consist of 2-inch bolts arranged in series, each series consisting of 44. These bolts are adjusted so that they can be readily removed, but as the tests demonstrated, rigidly hold the three sections of the structure.

To perform the first operation of self-docking, all portions of the center pontoon under water were required to be raised to a height of not less than five feet above the surface—thus allowing sufficient space to scrape and paint the bottom when deemed necessary. In raising the center pontoon, the connecting bolts were first removed between it and the ends. The latter were then submerged to such a depth as to allow twelve inches of clear space between their ship deck and the bottom of the center pontoon. This permitted them to be drawn under it and "centered." As the main section had been pumped out before the ends were placed on it, the only work remaining was to remove the water in the end compartments to the proper draft, thus lifting the weight.

The dock was also designed not only to lift the center pontoon from the water, but the ends. In this operation the movements were practically reversed. The connecting bolts being removed, the end pontoons were first hauled clear of the center. The compartments of the latter were filled until it had sunk to the proper depth. The end pontoons were then turned so that the direction of the length of each was perpendicular to the axis, which allowed them to be floated over the main portion and centered on keel blocking, the plan followed being similar to that in the docking of a vessel. The center pontoon was then pumped out, and the ends lifted to the proper freeboard without difficulty.

In docking the cruiser the entire structure was sunk to the maximum depth in one hour and thirty-six minutes, but pumped out in less than this period, the exact time being one hour and two minutes. Considering the size of the "Colorado" and the magnitude of the work involved, the time required was remarkably short, as only two hours and sixteen minutes elapsed from the time the ship was landed on the blocks until the keel was raised completely out of water. The "Iowa" was lifted above the surface of the water in one hour and thirty-seven minutes, and to the freeboard of 4½ feet in two hours and forty-two minutes, but during this operation one of the three pumping engines in the main pontoon ceased working for forty-two minutes, so that with the entire pumping capacity of the dock in operation, the time would have been somewhat shorter. In the self-docking tests each pontoon was sunk, hauled out, pumped to the proper draft, and connections made in twelve hours. In brief, the decision of the board of supervising engineers was that the dock is of sufficient strength and capacity to dock a ship of 20,000 tons displacement.

The arrangements for towing this great structure are of no little interest, on account of the length of the voyage and the weight and dimensions of the dock. While the framework, plating, and machinery contained represent a weight of nearly 11,000 tons, its height above the water, its unwieldy proportions, as well as draft make it far more difficult to tow in a seaway than an ordinary craft. In fact, it is a question if a raft cannot be guided with less difficulty. The towing fleet selected is composed of three United States colliers. The largest of these is the "Glacier," a ship of 7,000 tons displacement and having engines of 5,000 horse-power. The "Glacier" will be assisted by the "Caesar," of 5,016 tons displacement, having engines of 1,500 horse-power, and the "Brutus," of 6,000 tons and 1,250 horse-power. Consequently, the entire towing power will aggregate nearly 8,000 horse-power. The smaller craft, however, will be used not only for direct towing, but for steadying the dock in rough weather. In case of a storm, the suggestion

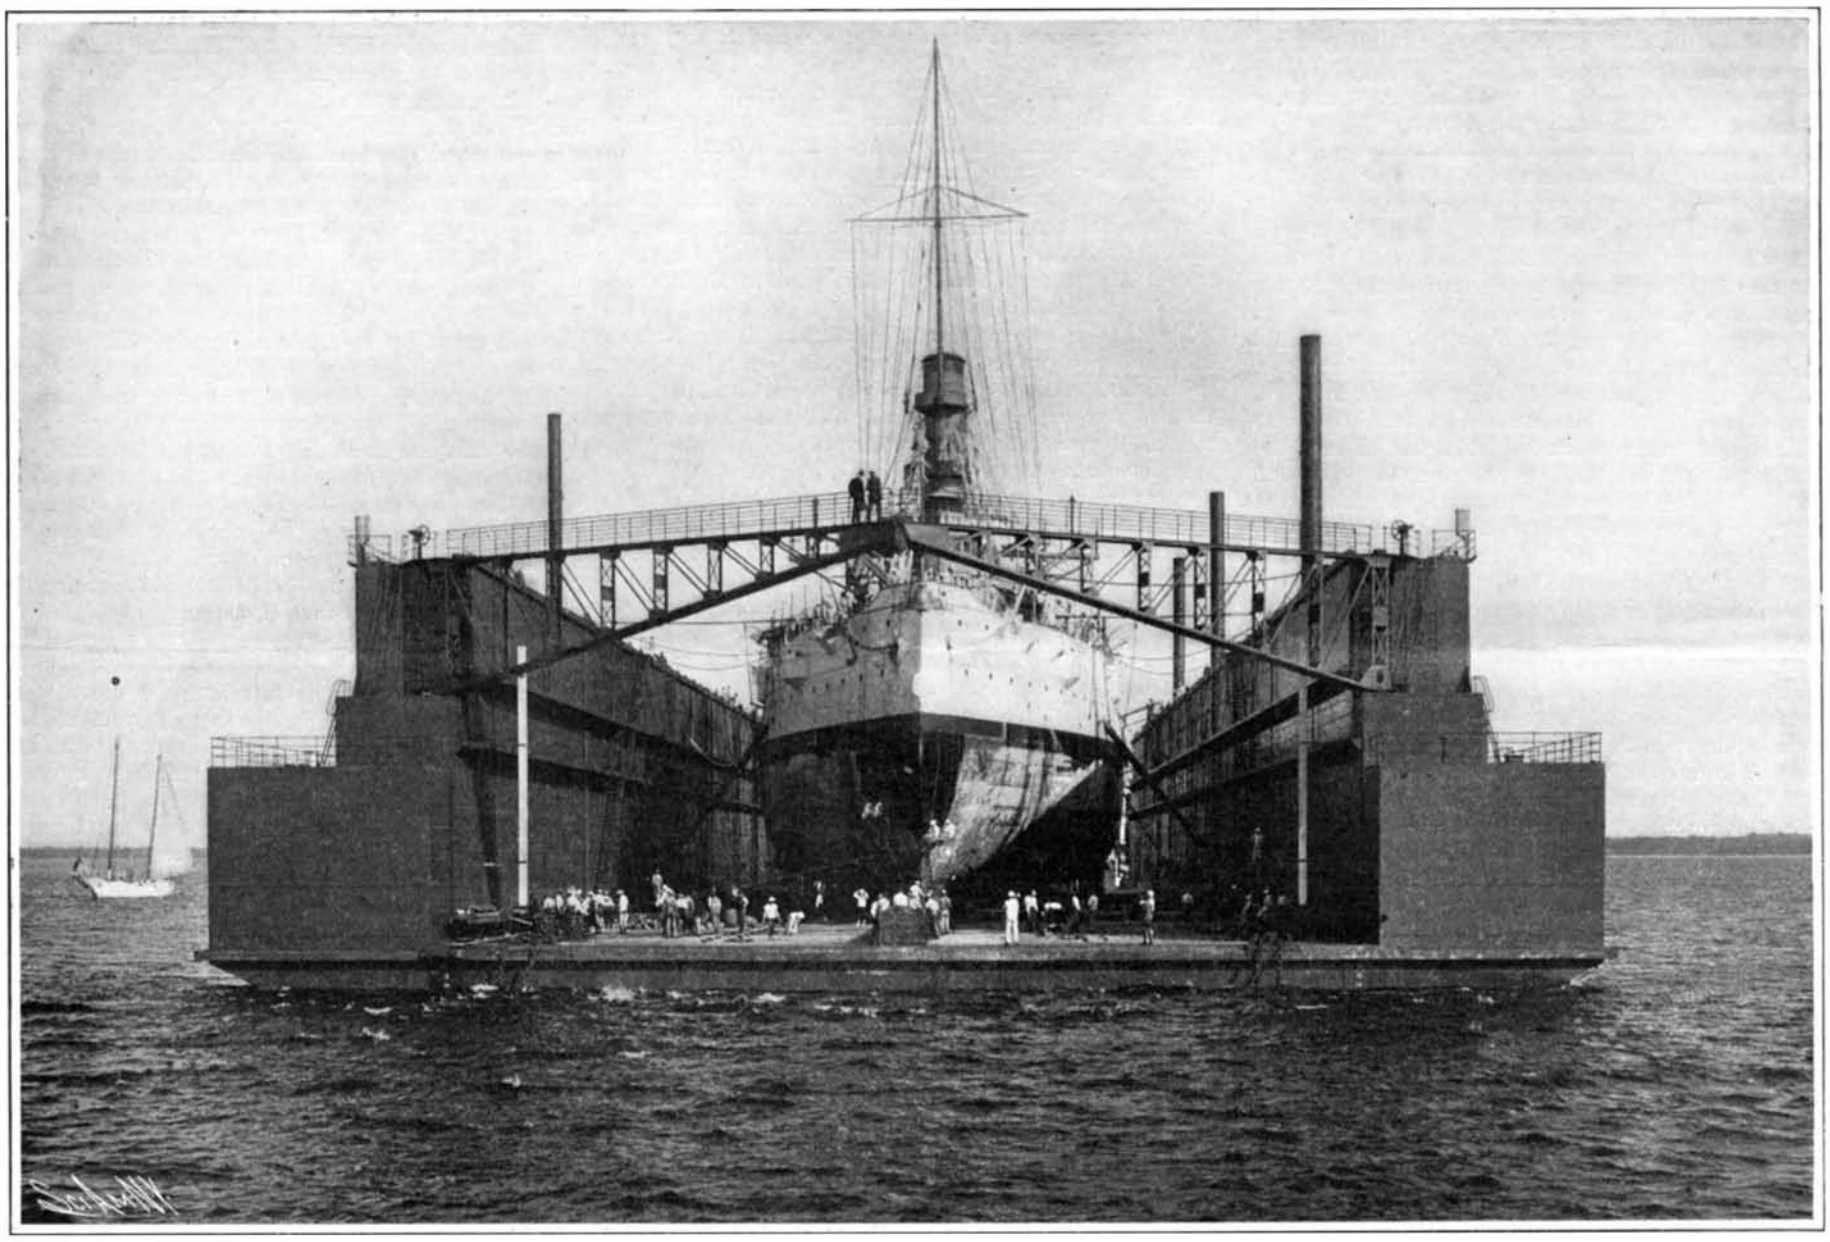

Water Completely Pumped Out of the Dock and the Vessel Raised.

THE CAVITÉ DRYDOCK.

has been made that it can be sunk to its maximum depth, thus exposing but a small portion of its side walls to the sea. The engineers, however, are of the opinion that its construction is sufficiently heavy to withstand a very severe strain.

The route selected is by way of the Suez Canal. While this is somewhat shorter than around the Cape of Good Hope, it is calculated that the dock will cover nearly 11,000 miles before reaching its destination.

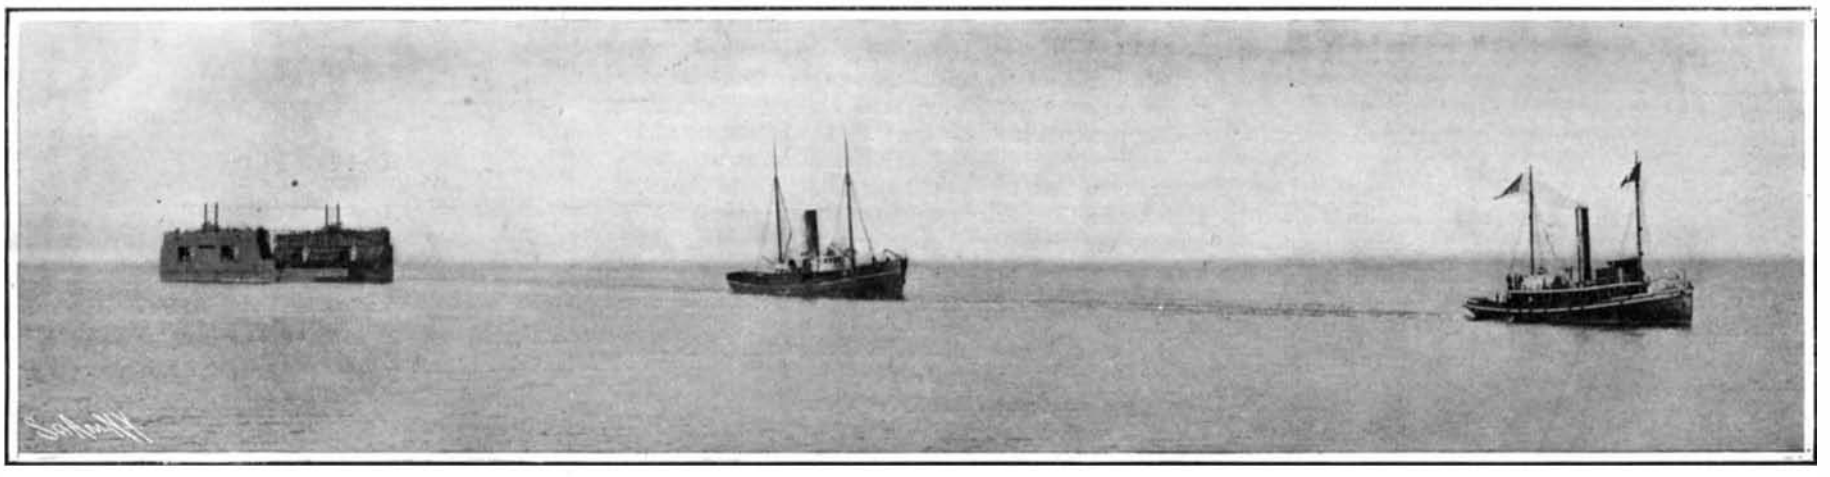

Towing the Algiers Dock to Its Station on the Mississippi, Showing How the Cavité Dock Will be Taken to the Philippines.

By the ordinary sailing route the distance is 11,650 miles, going by way of the Straits of Gibraltar, the Mediterranean Sea, the Canal, the Indian Ocean, the Straits of Malacca and the China Sea, although it may be necessary to take the dock to the south of Sumatra Island and not through the Straits. The question of towing through the Suez Canal is no small problem, for the minimum width which will accommodate the structure is 200 feet, the width of the dock itself being 134 feet. Therefore but 66 feet leeway is allowed to work it through the narrowest part of the canal. The Navy Department calculates that the fleet can move at the rate of about 100 miles per day, allowing about four months for the entire voyage. In towing, the cables used will be attached to machines which automatically pay out and haul in the connecting lines, thus easing off the great strain, which would probably break the cables in a heavy sea.

Interesting Facts Concerning the Carpet Industry of Persia.

Some interesting facts concerning the carpet industry of Persia are contained in the latest report of the British consul general for that country. Carpet manufacturing at Khorassan and the majority of the other manufacturing centers is divided into two classes—town woven and nomad woven. In Meshed itself there are 400 frames; in the Turshiz district there are over 50 frames, and further south near Duruksh, in the Kain district, over 450 looms were found working. None of these carpets can vie with the exquisite products of Kerman, although the quality and color are improving. There are from 2,000 to 3,000 looms in which nomad carpets are woven. These Baluch carpets are mainly worked in dark shades of red and blue. An interesting custom prevails among the nomad tribes by which a girl, before becoming eligible for marriage, has to prove her skill by weaving two very fine rugs or saddle-bags. It is this class of work which is particularly prized in Europe and America. In 1903-4 a law was re-enacted by the Persian government by which the customs department was instructed to seize and burn all carpets in the manufacture of which aniline dyes were used. A total cessation of exports resulted, and owing to the hardships inflicted by this decree manufacturers were granted a certain period of grace in which to dispose of their stocks of carpets condemned by this measure.

Why Do We Smell?

Is the sense of smell excited by gases or particles? According to Dr. John Aitken, F. R. S., the eminent English specialist, who has devoted considerable time and study to this problem, gas is the fundamental basis of the sense of smell. In experiments he first investigated musk, of which it is possible to detect by smell, according to Berthelot, 0.000,000,000,000,000,01 gramme. Dr. Aitken carried out his researches upon the cloudy condensation basis, in which, if odors are attributable to particles, the latter form nuclei of cloudy condensation in supersaturated air, and thus make their presence visible. In the case of musk no such nuclei were detected, proving conclusively that musk does not give off solid particles, but evaporates as a gas or vapor, and that it is gaseous particles from the musk that act on the sense of smell. Of twenty-three other odorous substances, not one gave its perfume in solid particles, nothing but gases or vapors escaping from them. Dr. Aitken points out that our nostrils appear to substantiate this theory. The perfume of snuff, for instance, is a soft, velvety sensation, while the effect of the solid is sharp and biting, more allied to pain than pleasure.

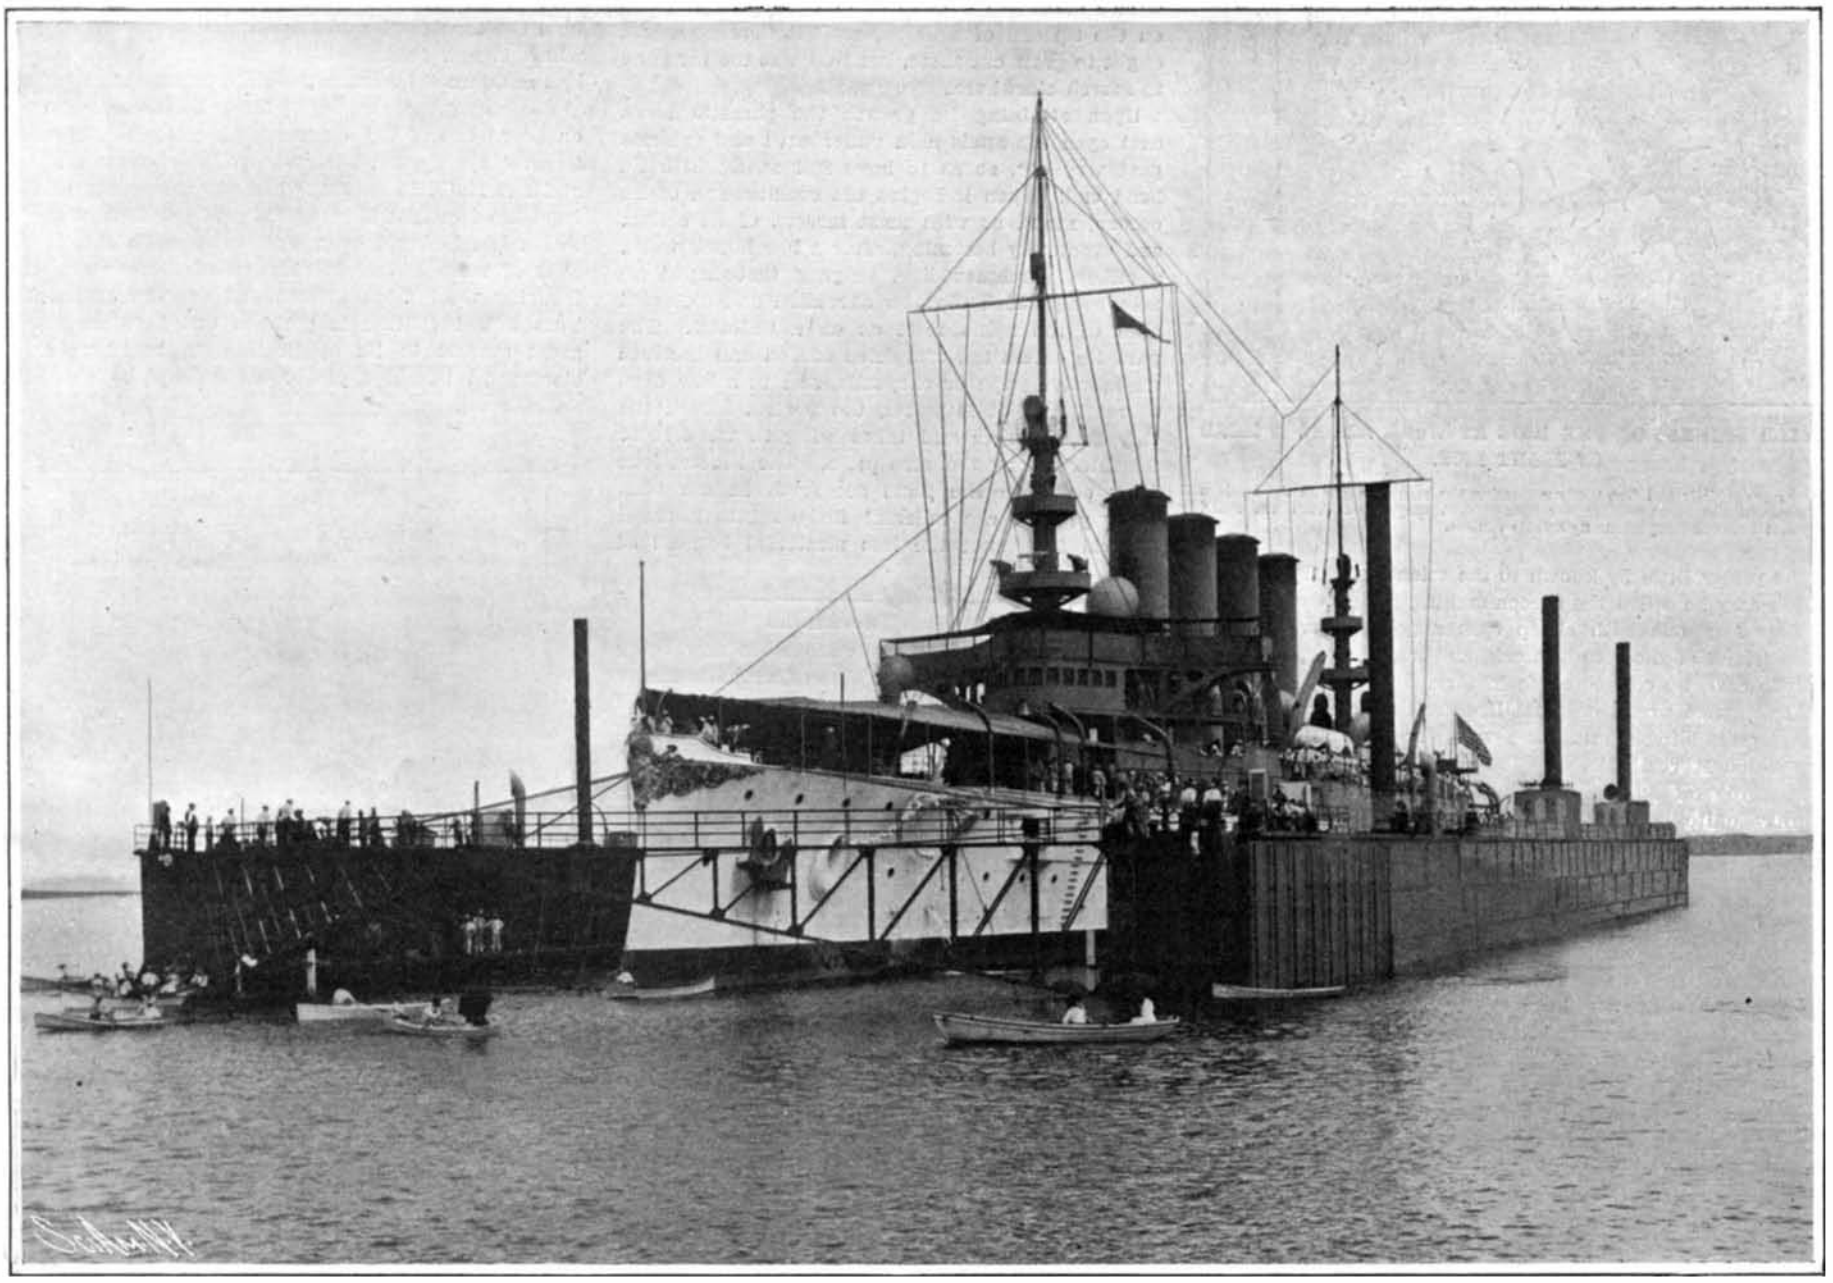

An Armored Cruiser Ready to be Lifted Out of Water.

THE CAVITÉ DRYDOCK.

A LITTLE FRIEND OF THE ROSE.*

BY S. FRANK AARON.

The flower-loving insects are all friends in need; but the unhoneyed flowers also have their insect friends, not agents of fertilization only, but protectors and champions that fight the battles of those that must depend on the flower stems and leaves and buds to survive. But though the flowers are voiceless, they tell us with none the less eloquence what their enemies are and how they suffer by them. Ask the rose. The withered, skeletoned leaves proclaim the enmity of the saw-fly slug; eaten leaves and others folded over tell of the larvæ of the golden-winged tortricid moth; while cankerous, eaten buds and flowers denounce the rose bug, the aphides, that crowd the green stems and leaves of the newer growth and swarm all over the tender buds.

Annihilate the aphides upon a dozen stems of a thrifty bush and keep others off; then let a dozen others go full of the lice, and watch results. The number and the beauty of the blossoms will be the answer. Now, Nature generally makes a wise effort to strike a proper balance, and though we have heard this denied concerning the potato beetle, yet it is true, more or less. Thus she has furnished several antidotes for the aphis; if she did not, the little pests would become a nuisance indeed, past all calculation. This salutary purpose is effected by the several larvæ of the syrphus fly, the lace-winged fly, the ladybug and a number of very small Hymenopterous parasites. Of these latter the most interesting and the most common

LITTLE FRIENDS OF THE ROSE AT WORK AMONG A HERD OF PLANT LICE.

Any one carefully and frequently inspecting the rose bushes and the aphides gathered on the green and tender new growth may see enacted the small tragedies between the parasite fly and its victims.

is the pretty little fly known to the scientists as Praon, which may be called the cocoon-making parasite of the aphis. Any one with sharp eyes may discover this little friend of the rose at work, and may follow, with a little care, its complete life history.

At the time when the plant lice are thickest a small insect resembling a miniature wasp, or an ichneumon fly, which it really is, may be seen making its way among the fat aphides, moving leisurely and with a dignity quite beyond its size, for it usually is not longer than an eighth of an inch. It approaches one of the larger aphides and touches it with its antennæ as a means of certain identification, scent far outranking sight in such matters among insects. If this were an ant the aphis would respond with a liberal supply of the coveted honeydew, but knowing friends from foes it now slings its body from side to side, quite violently indeed for such a lethargic creature, and the little fly is pushed aside. Not liking this it moves on to another or smaller aphid with a less vigorous movement, or pausing a moment attacks the same aphis again, with perhaps better results. Choosing its position deliberately and carefully, with its slender, stiltlike legs lifting it high, it widely straddles its victim, its fore legs often resting on the aphid's back, its slender body and long antennæ much jostled by the agitated plant louse. But now the fly is not to be dislodged. Its keen, swordlike ovipositor protrudes from its sheath, and in a moment is thrust deep into the back of the plant louse, and is held for just another moment, until an egg, so tiny as to pass through the slender organ, is deposited into the very interior anatomy of the rose pest. Then withdrawing, the fly straddles off and proceeds at once to convert another aphis into an incubator, and so on, until no doubt the egg supply, perhaps fifty or more, becomes exhausted.

Of course the aphis so treated does not die at once, else Nature's plan would miscarry. It lives and goes on feeding and maintaining the same stiff and seemingly contented attitude for a little while. Meantime the egg hatches a minute, white, maggot-like larva, and this at once begins feeding on the soft muscular tissues of its host. Some little time is required for the larva to complete its growth—five or six days during very warm weather, longer when it is cool. With an instinct that has ever been a marvel to the naturalist the little larva does not touch the digestive organs, the vascular system or the more important nerves for a period, thus permitting the aphis to live and feed until the appetite and growth of the parasite warrant it to eat all before it. Then the aphies dies, of course, and rapidly becomes only an outer skin, with head and legs attached.

For some strange reason the aphis, not long before dying, forsakes its place among its fellows. As if ostracized for its condition, although its disease is hardly catching, it crawls away to one of the larger leaves, fastens upon it in exile and thus remains. It is obvious that this benefits the parasite; the aphis here is far less apt to be found and attacked by numerous other enemies that would endanger the life of its guest. But what can influence it? It departs from its habit, for it is altogether social and non-migratory. It removes to a less desirable pasture ground. Normally, if dislodged from the stem and falling on the leaves it crawls back as fast as its indolent legs permit to the stem again.

The parasite is alone benefited, but it is out of the world, so to speak; it can not get at its host's locomotory appendages; it is a legless, eyeless creature that at best would make a poor guide if it should get out and take the lead. But the little thing, as unintelligent as it looks, maggot-like, has perhaps a mind of its own, as we have seen. The habit is almost invariable; the victims crawl from their usual places and position themselves on the leaves. Out of seventy-one parasitized plant lice I found two on the stem and one on the tip end of a thorn, as if it thought a leaf ought to grow out there, but that was too far gone to search elsewhere.

Upon attaining its growth the parasite larva cuts open the aphis skin underneath and squirms part way out, so as to have full swing with its head end. Then it begins the construction of its cocoon, made, as with most insects, of its saliva, and eventually becoming, after a few hours' work, a silken, parchment-like, bulging, tent-shaped affair, upon which the now shrunken and distorted skin of the aphis rests as on a pedestal. The parasite enters the completed cocoon and becomes an inactive pupa or chrysalis, and in a few days thereafter, if it is warm, the perfect insect, the tiny fly, emerges and takes wing to work more mischief among the rose pests. The illustrations fully elucidate the facts set forth in the text. They present a wonderful insight into a small natural force, not the less masterful because of its mimic scale.

* From American Homes and Gardens.

Two Valuable Inventions.

Two apparently valuable innovations are now being put on the market in Italy, the first of which seems to be highly suitable for use on board submarines. The Italian Health Society (Societa d'Igiene Italiana) is now exhibiting at the offices of the Federation of the Technical and Scientific Societies an apparatus which has just been patented in Italy, France, and Germany, and to which the inventor (Signor Bertini) has given the diverting name of the "Bertini noseroscope," or bad air detective.

Besides being a veritable indicator of the presence of foul and noxious air and vapors in general, this apparatus is likewise intended to prevent the occurrence of accidents due to the presence of dangerous and inflammable gases which might, during the night or unperceived at daytime, escape into rooms and compartments from stoves, cooking ranges, pipes, and the like, or accumulate in any other way due to stoppage of normal draft. When the pressure in the inner chamber of a stove, range, etc., is less than that of the external atmosphere, the gas or vapor cannot escape because a good draft is induced, whereby the combustion of the gases or their removal *via* the proper channels of escape is assured. To obtain a perfect draft and proper combustion, so as to prevent all noxious effluvia and gases from escaping into inclosed spaces and thus causing danger to health and life, it is thus essential that there should always be a slight depression in the pressure prevailing in the combustion chamber. The duty of the noseroscope is to call attention at once to any stoppage or abnormality in this inner depression, an alarm bell being set ringing, which will not stop till the proper pressure has been restored.

The second invention is also one of special interest

MINIATURE PIG STICKING, AS SEEN THROUGH MAGNIFYING GLASS.

The fly of the rose aphis parasite stinging and laying its egg in the body of a rose aphis. The plump little plant lice look like hybrids between a verdant goat and a green pig and they get about much like overfat swine. Their inactivity permits them to be readily attacked, and their only attempt at defense is in wagging their bodies from side to side, which sometimes for a moment disconcerts the parasite fly.

to all concerned in matters naval. At the oil and grease works of Messrs. E. Follzer & Cia., at Rivarolo (Liguria, Italy), trials are now being made with a new apparatus for the re-utilization of the oils used for lubricating marine engines; the inventors are two Italian engineers, Signori G. B. Bibolini and G. Baulini. The experiments are being carried out under the auspices of several well-known technical men, including engineers Varella and Jorge Howard, both members of the Mexican commission appointed to superintend the construction of the big transport "Progresso," which is now being built for the Mexican government by the Odero shipyards at Sestri Ponente.

The apparatus now being tested is intended for use on board one of the steamers belonging to the Italian General Navigation Company; it is extremely simple and automatic in action, while its value may be seen from the fact that it recuperates 70 per cent of the oil which has hitherto been wasted. Despite this it permits of more liberal lubrication of the engines, thus insuring their more perfect and continuous running. This new invention is perhaps called to meet with great success in its application on board of ships, steamers, battleships, *et hoc genus omne*, both at home and abroad.

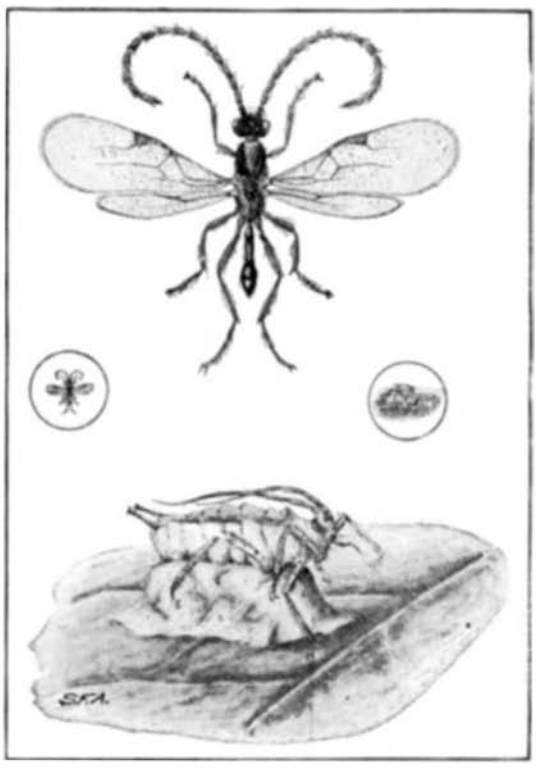

THE PARASITE OF THE ROSE APHIS, MUCH MAGNIFIED

The upper figure is the fly as seen from above; the colors, black, rufous red and yellow, have almost a metallic luster, and the delicate, transparent wings reflect a beautiful iridescence. The lower figure is the cocoon of the parasite beneath the dead, dried and distorted shell of a plant louse, the insides of which have been eaten by the parasite larva while attaining its growth, after which it makes the cocoon. The little figures in the circles indicate the natural size.

Patent Department

SUPPORT FOR HAMMOCKS.

The hanging of a hammock is often quite a problem, because of the lack of suitable supports at the desired location. Only occasionally can two trees be found spaced apart the required distance for the hammock. Posts are sometimes sunk into the ground to serve as supports, but the constant swinging of the hammock is apt to work them loose in time. In the accompanying engraving we illustrate a new hammock support patented by Mr. M. A. Dickinson, of West Swanzey, N. H.; so designed as to hold its position firmly at all times. This permits one to hang his hammock at any place he wants to, without regard to the location of trees or other fixed supports. Also, if desired, one end of the hammock may be supported by a tree and the other end by one of the new supports. The latter comprises a socket piece formed with a coarse thread which adapts it to be screwed into the ground, offering considerable resistance to displacement. A post is seated in this socket piece and secured by a bolt. A bracket is fastened to the top of the post, and another to the lower end. Three struts are connected to the upper bracket, and their outer ends are hinged to spreaders carried by the lower bracket and lying along the ground. The struts are permitted a certain amount of play in the upper bracket and may be clamped to such position as to adjust the device to irregular ground. A substantial support is thus given to the post. If one wishes to remove the posts this may be readily done without disturbing the sockets. This is of advantage in cases where the hammock is supported on a lawn, for the posts may be readily removed to permit mowing the grass and afterward as readily set up again.

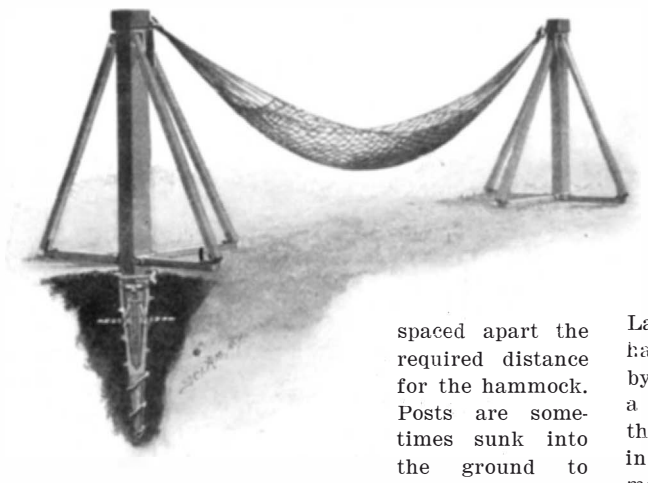

SUPPORT FOR HAMMOCKS.

A SIMPLE DOOR CHECK.

The purpose of the simple device illustrated in the accompanying engraving is to hold a door at any desired opening, or to permit it to close slowly without slamming. The door check consists of a rubber cushion applied to the door in such a way that it bears on the floor under control of the spring. This spring is shown at 1 in the engraving, and the rubber cushion is attached to the block, 2, which is mounted to slide in a box fastened to the door. The lower arm of the spring 1 passes through an opening in the block 2, so that when the upper arm is depressed the rubber cushion is forced down onto the floor. To hold the cushion in this position a locking device, 3, is provided, which consists of a rack with inclined teeth, adapted to engage the upper arm of the spring. An auxiliary spring, 4, is provided which passes under the arm, 1, and is fastened to the stud that carries the main spring. This auxiliary spring serves to lift the cushion from the floor when the spring arm is released from its rack. The device is set by pressing down the spring arm with the foot. The pressure on the floor or carpet depends upon which one of the rack hooks is engaged. Thus the device may be regulated either to hold the door firmly open, or to permit it to gradually close. When the door is closed, the device may be forced tightly into engagement with the door sill, thus forming an auxiliary lock. A patent on this novel door check has been granted to Mr. Charles McGinnis, El Paso, Texas.

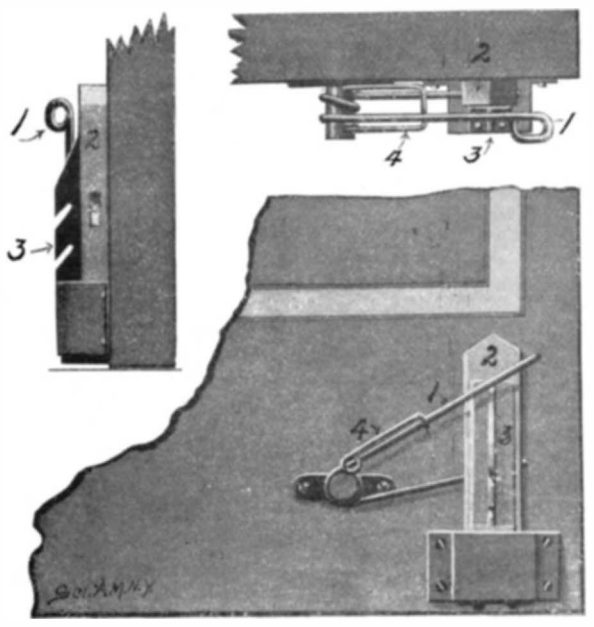

A SIMPLE DOOR CHECK.

Brief Notes Concerning Patents.

Train markers of bunting have been the rule for a great many years, but there is now possibility that these will be entirely supplanted by markers of metal, which are said to be much more satisfactory from several standpoints. Such a flag has been invented by Conductor J. Landers, of the Canadian Pacific Railroad, and after having been given a test in actual use, is being adopted by the company and will be placed on all trains. Such a signal can be seen and read a much greater distance than the bunting ones, for the reason that it is always in the best position for the trainmen to see. As the trains grew in length, with the use of heavier and more powerful engines, the trouble of making out the signals became a serious matter with the railroad men, but with the metal signal there is little or no difficulty. It has been recently announced that the same scheme is about to be adopted on the Southern Pacific line; and for the purpose of encouraging the employes of the company to exercise their ingenuity, the general manager has offered a prize of fifty dollars for a device that will answer the requirements and prove acceptable to the company. Besides the prize, the company will assume the costs of having the device properly patented, and will give the inventor the right to make use of it wherever he can find a market, but the company reserves the right to make use of it on the trains of its own line for all time. In this connection a standard with two flags has been invented for use on engines. The marker here is always green or white, and the color displayed can easily be changed by swinging one of the metal flags all the way around. Means are provided on the standard for locking the flags in place, to prevent their being tampered with.

So simple a matter as the sanding of the tracks of a railway company has given the management of railway companies a great deal of annoyance. All sorts of devices for accomplishing this purpose have been suggested and tried, but nothing has been arrived at which is said to do the work in a manner entirely satisfactory. It would seem an easy thing to devise some attachment of this character, but not so. A box secured to some convenient part of the car to hold the material, and supplied with an outlet controlled by some simple form of valve, might be supposed to fill the bill, but this is open to many objections, the principal one of which is that in this arrangement the sand cakes and refuses to flow at the critical moment. An entirely new idea in this direction is being experimented with by the Schenectady Railway Company. This consists of a brick composed of sand and rosin secured to the running gear of the car, and at such times as it is desired to sand the tracks, the brick is forced up against the wheel, and a sufficient quantity is thereby pulverized and scattered along the rails. When the brick has been worn away, it is replaced by another.

In order to promote and continue the valuable work accomplished by Prof. Flinders Petrie in his excavations in Egypt, it is intended to establish a British School of Archæology in Egypt upon a permanent basis. It is not considered that a central building such as exists in Athens or Rome is necessary, as it is realized that the most suitable place for training the students is upon the spot where the excavations are being carried out every year. An influential committee has been organized to supervise the task of establishing the school, and the sum required annually is approximately $7,500. The school will constitute a ramification of the general development of research work in the expansion of the University of London. The scope of the object is to promote the continuance of Prof. Petrie's work, and to train the students in historical research.

IMPROVED WATER-TUBE BOILER.

Several months ago we published a description of a water-tube boiler invented by Mr. J. M. Colman, of Everett, Wash., Box 277. This boiler has since been greatly improved by the inventor, and the accompanying engraving shows the present construction, which has just been patented by Mr. Colman. The object of the new form is to reduce the cost of manufacture and to increase the effectiveness in operation. The boiler is formed with the usual headers, *A*, and inclined side tubes, *B*. It will be observed that the headers are arranged in vertical alinement instead of forming an inclined row, as in the previous construction. In addition to the side tubes, a series of small tubes extends across from header to header. The weight of the boiler is carried by four tubes, *C*, which stand at the sides of the grate. These legs communicate with the side tubes, *B*, and form water-protected supports for the boiler. There are only three tubes, *B*, at each side of the boiler, a space being allowed between the top side tube and the one directly below, which is sufficient to receive an additional side tube, if desired. But instead of that, the inventor has provided a central tube, *D*, and connected it with the adjacent side tubes by means of small tubes, *E*, extending diagonally across the boiler. Thus a greater heating surface is secured. The upper side tubes are connected by a series of tubes, *F*, while a series of shorter tubes connects each side tube or header and the one immediately above it. Special attention is directed to the strengthening device for these short tubes, which is shown in the detail view. A ferrule, *G*, is mounted upon the outside of each tube, *J*, and the large tubes or headers are effectively held apart by the ferrule. A rod or bolt passes through each short tube, *J*, and, by means of spiders, *H*, and a tightening nut this bolt is adapted to securely hold the upper and lower tubes together. It will be seen that an adequate connection is secured among the several large tubes and headers of the boiler, and that a great amount of heating surface is provided. The steam formed in the various tubes is not impeded in any way, but naturally collects in the upper header, whence it passes up to the steam dome. An important feature of the device is the provision of manholes in the ends of the headers, side tubes, and steam dome. This provides for the ready inspection and cleaning of the various parts of the device. Provision is also made for firing from either end or from both at the same time, so that the firing end can be changed at will to suit convenience or for blowing out soot from all sides.

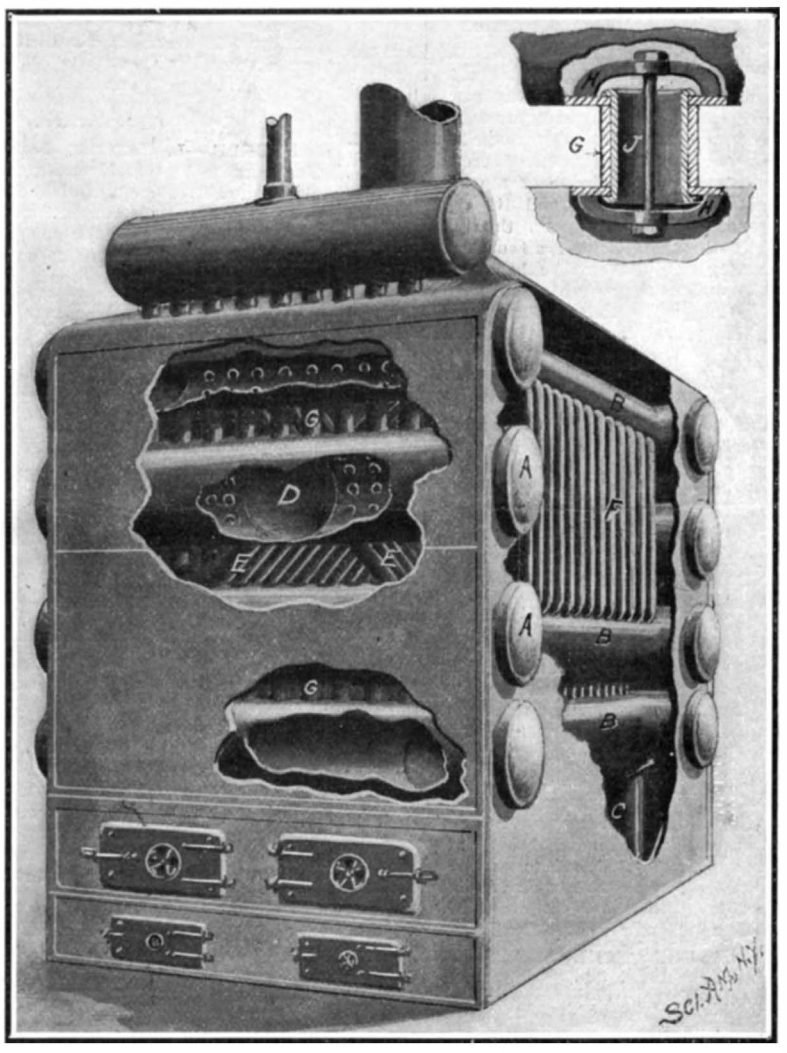

IMPROVED WATER-TUBE BOILER.

RECENTLY PATENTED INVENTIONS.

Electrical Devices.

DOUBLE JACK FOR TELEGRAPH-CIRCUITS.—O. JOHNSON, Conway Springs, Kan. The more particular object of this inventor is to provide a plurality of circuits or parts of circuits, so as to throw one set of instruments out of commission and another into commission. He so arranges the instruments and wiring that a telegraph operator by merely inserting a plug in a jack can shift parts of both the main and local circuits from sending and receiving instruments located upon one table to other sending and receiving instruments upon another, all instruments being connected by a common relay.

MAGNET-CONTROLLED THIRD-RAIL SYSTEM.—H. J. PALMER, Philadelphia, Pa. In this case the more particular object is to produce a system in which improved mechanism controllable automatically by a magnet is used for the purpose of temporarily completing the circuit. The invention also refers to certain improvements in mechanism to be mounted upon a movable vehicle for the purpose of governing the contact mechanism for supplying current to the motors of the vehicle.

Of General Interest.

LIFTING APPARATUS FOR DEEP WELLS.—F. J. MOSER, Kane, Pa. In Mr. Moser's patent the invention has reference to lifting apparatus for deep wells and the improvement admits of general use, but is of a peculiar value in such regions where it is desirable to raise oil or liquids from considerable distances below the surface.

MOTHPROOF BAG.—G. M. D. MANAHAN, New York, N. Y. The object of the present invention is to provide a bag perfectly mothproof and air-tight and provided with garment-supporting means arranged within the bag for supporting garments therein, the means extending to the outside of the bag to permit suspending the latter and its contents from a hook or other support, thus relieving the material of the bag of all undue strain, and insuring long life to the bag. The invention relates to moth-proof bags such as shown and described in the Letters Patent of the United States formerly granted to Mr. Manahan.

BOX-LID HOLDER.—G. LOOS, Grafton, N. D. This device holds a box-lid in an open position. The invention is especially applicable to cigar-boxes. It is easily applied to boxes of various thicknesses by reason of the construction employed for grasping the box end, and the device may be applied to either end of the box with equal facility. It may be operated to hold a lid in any position desired.

MEASURING DEVICE FOR SHOE-LASTS AND FOOT-COVERINGS.—G. ENGELHARDT, Cassel, and C. F. FÖLSCH, Wernigerode-on-the-Harz, Germany. The object of this invention is the provision of a new and improved measuring device for shoe-lasts and foot-coverings arranged to permit of obtaining the proper position of the toe portion relative to the main or heel portion of the wearer's foot.

DRINKING-STRAW.—W. H. DEWENDER, New York, N. Y. The invention pertains particularly to improvements in straws or tubes designed for convenience in drinking liquid from a bottle, the object being to provide a straw or tube designed to extend to the bottom of the bottle and having thereon a closure for the bottle-mouth to prevent the entrance of dust or other matter floating in the air.

COMBINED CANE AND TRIPOD.—W. F. CLARK, St. Louis, Mo. One object of this improvement is to provide a construction for a tripod which enables it to be very closely folded and when folded simulates the form of a walking-cane. The tripod facilitates the use of a camera by tourists and others where the portage of the usual tripod is burdensome and otherwise objectionable, and the device may be utilized as a movable support for music-sheets or a book.

PACKING-CASE.—T. H. CLEMENT, JR., Port Lavaca, Texas. The invention refers to packing and shipping cases, and is intended especially to receive oysters. The object is to produce a case in which the oysters may be conveniently carried, so that ice may be packed around the vessel containing the oysters to preserve them while stored away or while being shipped. The receptacle will contain a large quantity of oysters without subjecting them to great pressure.

ROOF-CLIMBER.—J. S. BAKER and C. F. KETCHEM, Cornish, Ind. Ter. This device is adapted to be attached to the feet to enable the wearer to walk or otherwise support himself upon shingle or other sloping wooden roofs. By means of this device the use of wooden brackets or scaffolds may be dispensed with for the purpose of supporting the wearer on sloping roofs, and thereby a great economy of time and labor effected in the shingling or repair of roofs.

GARMENT-FASTENING.—J. BISCHOF, Boston, Mass. In the use of many of the ordinary hook-and-eye fastenings for garments and the like it frequently happens that the cloth beneath the eye becomes worn by movable contact therewith of the bill or other portion of the hook, resulting sometimes in the eye becoming detached from the cloth and in nearly all cases necessitating patching, both to repair worn spots and to provide a reinforce by which to again secure the eye in place. One of the principal objects is to overcome in this invention the above mentioned objections.

HEATING-FURNACE.—W. N. BEST, Los Angeles, Cal. This invention relates particularly to improvements in furnaces for annealing portions of armor-plate where holes are to be drilled, for heating patches of metal, so that the same may be readily bent to form a perfect fit, and also for brazing and other purposes where intense heat is required, the object being to provide a furnace that may be conveniently handled and in which a cheap grade of fuel may be quickly volatilized—such, for instance, as water-gas tar, coke-oven tar, crude oil, or residuum oil, that are not so easily volatilized as gasoline, coal-tar, or naphtha.

SAW.—J. BAUMGARTNER, Silverton, Ore. This is an improvement in saws, being in the nature of a combination hatchet and saw. The inventor utilizes the head of the hatchet as a support for the device for securing the butt-end of the saw-blade and the butt-end of the handle as a support for the swinging carrier for the other end of the saw-blade and also constructs the handle of the saw to form a receptacle for the saw-blade and the swinging carrier when the saw is adjusted out of position for use.

HAND OIL-CAN.—G. H. THOMAS, Elmira, N. Y. More especially the invention has reference to oil-cans (commonly known as "squirt-cans") of the type ordinarily employed by mechanics and others for applying oil to the working parts of machinery to lubricate the same. Parts may be separated the one from the other either for the purposes of cleansing or repair and the device possesses many advantages in points of simplicity, convenience, and economy.

Hardware.

BUCKLE.—L. SANDERS, New York, N. Y. The purpose in this invention is to provide a simple and durable form of buckle particularly adapted for use in connection with the back straps of trousers, vests, and like garments, but which may be otherwise employed, and to so construct the buckle that it will be practically flat, comprising but two parts—a tongue and a frame—and which two parts have supporting and locking engagement when the buckle is locked upon a strap.

PIPE-WRENCH.—G. FOGGAN, Pleasantville, Pa. This invention is a pipe-wrench of that class wherein the pipe is encircled and gripped by links pivotally connected together and to a handle, by the swing of which the requisite pressure is applied to grip and turn the pipe. It is characterized by few and simple parts and quick and powerful action and freedom from some defects incident to known constructions.

Heating and Lighting.

GRATE.—J. WOOD, Noroton, Conn. This invention relates to a rotary grate adapted particularly for house heating-stoves, but useful in connection with stoves and furnaces of all types. It resides particularly in a certain peculiar arrangement of the rocker-bar on which the rotary grate is mounted and by means of which the grate is turned into dumping position, this bar coacting with the pinion for rotating or turning the grate to shake the same. It also resides in a peculiar lock device for the rocker-bar.

Household Utilities.

CHAIR SEAT OR BACK.—G. B. MULLEN and T. P. MULLEN, New York, N. Y. In this instance the improvement has reference to chairs and analogous furniture, the more particular object being the provision of a removable member which may be used either as a seat or as a back and furnishing certain constructional advantages.

COMBINED DOOR HOLDER AND BUFFER.—J. A. ROSS, Elgin, Utah. The object of the present invention is the provision of a novel simple door-holding device which may be instantly converted into a buffer adapted for contact with a wall when the door is swung open, and thus prevent injury to the door and wall.

Machines and Mechanical Devices.

MANUFACTURE OF WALL-COVERINGS.—T. CLEARY, Schuylerville, N. Y. In this patent the object of the inventor is the provision of certain new and useful improvements in the manufacture of wall-coverings, whereby a highly ornamental crushed plush or crushed velvet effect is produced in an exceedingly simple and economical manner.

MACHINE FOR PRODUCING PLUSH EFFECTS ON WALL-COVERINGS.—T. CLEARY, Schuylerville, N. Y. In this invention the aim of the inventor is to provide a new and improved machine more especially designed for producing a highly-ornamental plush effect on wall-coverings in an exceedingly simple and economical manner. This is a division of the application for improvements in the manufacture of wall-coverings formerly filed by Mr. Cleary.

LAWN-MOWER.—J. N. BRYANT, Sparta, Tenn. In this mower there is a longitudinal frame supported at about its center by an arched frame portion having running wheels. A reciprocating cutting mechanism is provided at the front end of the frame and this may be driven either by hand through suitable driving connection through the rear end of the frame or the shaft of the cutting mechanism may be thrown into gear with toothed rims or annuli on the wheels; a novel form of gearing being provided for this purpose.

WASHING-MACHINE.—H. PLAGMANN, Davenport, Iowa. In use of the machine the tub is first fixed against movement. Raise the cover-section, and means provide for introduction of water mixed with a detergent and articles to be washed. Close the cover, connect link, throw lock off the tub and it is oscillated upon its trunnions by moving the lever. As the sector carrying the gear-teeth is attached to a relatively fixed point through the link system, the pinion upon the interior shaft is caused to travel past the gear and by its engagement rotates the shaft. This revolves attaching-pins, which moves contents about the tub, rubbing articles against a projection and tub-walls. At the same time circulation of cleaning liquid is produced by swaying motion of the tub.

CARTON MAKING AND SEALING MACHINE.—R. SUNDERMAN, Buffalo, N. Y. This invention relates to machines for making and sealing cartons, and has special reference to a machine provided with instrumentalities by which flattened carton shells or tubes may be expanded or opened, then formed into a carton by folding and securing flaps at the bottom of the shell or tube, and the cartons finally closed and sealed after they have been filled.

PULVERIZER.—N. SPURGIN, Ottawa, Ill. In use a beater-shaft is rotated and material introduced through a feed-chute. Beaters hurl it against rings, which present a large pulverizing-surface, toothed faces of upper ring-sections furnishing a reducing-surface. As particles fall they will be again and again struck by the beaters, dividing them until of such size as will pass through spaces between the rings, when they are received by the casing and directed by the hopper to a receptacle. This reduction progresses as material is advanced by the inclined blades, and before it reaches a discharge chute it will be in such a state of division that all will have passed into the casing except pieces of stone or iron, which will be delivered separately.

BUTTER-CUTTER.—W. H. ROUSSEL, San Francisco, Cal. Mr. Roussel's invention pertains to apparatus for cutting such substances as butter, it being especially adapted for the division of large masses of material into cubes of a generally marketable size. Its principal objects are to provide a simple, durable, and effective cutting apparatus. It is entirely free from gearing and elements liable to get out of order, the cord being durable and if broken cheaply replaced.

Pertaining to Recreation.

GUN.—I. A. TOMASINI, Guadaloupe, Cal. In operation when the rear trigger is pulled the plunger is withdrawn from the notch in the lug, allowing the gun to break. The breaking turns the rocking lever and pulls the sliding plate forward, thus cocking the hammer. The gun-barrels are then returned to their proper position with respect to the frame and the gun is ready for action. It may be fired much quicker than the ordinary two-triggered gun and the trigger forms a simple yet efficient locking means for holding the barrels and frame in alinement.

Pertaining to Vehicles.

CART.—A. W. RANSOME, New York, N. Y. This improvement relates particularly to a cart intended to be manually propelled and useful for carrying plastic concrete and other materials. Its principles may, however, be embodied in a horse-drawn cart. It is particularly intended for concrete work where materials have to be dumped from the cart on both horizontal surfaces and over the brink of scaffolds or pits and excavations. The inventor's object is to provide a cart which may be readily converted from one intended for use in dumping on horizontal surfaces to a cart well suited for dumping into excavations.

SANDING DEVICE FOR AUTOMOBILES.—A. L. MOSS, Sandusky, Ohio. In the present patent the object of the inventor is the provision of a new and improved sanding device more especially designed for automobiles and similar vehicles to prevent the same from slipping while traveling over wet or slippery streets or roadways.

STEERING MECHANISM.—W. K. CLEVELAND, St. Petersburg, Fla. In this steering mechanism the drive shaft of the vehicle consists of a central section and two end sections coupled thereto by means of a universal joint. A sleeve is carried on each end section and these sleeves are connected to the steering gear. The wheels which are also carried on the end sections can thus be moved to steer the vehicle.

Railways and Their Accessories.

RAILROAD-TIE.—E. S. BEGLER and H. WITTMANN, Cincinnati, Ohio. In constructing a road the ties are placed in position on the roadbed, the rails laid thereon, and the securing-plates are inserted into the ties, after which the keys driven into the plates through the outermost openings. The tie may be then filled with concrete through the central openings and the imbedding-concrete placed in position around the same. The large extent of supporting-surface provided by the extensions reduces to a considerable extent the number of ties required for supporting the rail. Approximately sixteen wooden ties are used on a thirty-foot rail; on this only twelve are needed to furnish a like support.

SAFETY-BRIDGE FOR CARS.—H. ALSOP, Chicago, Ill. The invention has reference to an improvement in safety bridges and guards for cars, more particularly stock-cars, and has for its object to provide a simple, cheap, and efficient service for loading and unloading stock and other cars and one which can be readily applied to cars now in use, as well as to new cars.

SWITCH-OPERATING DEVICE.—W. E. HUBBARD, Dennis, Texas. Mr. Hubbard's invention relates to the automatic operation of switches by moving trains, and comprises means for accomplishing this purpose in an efficient and thoroughly reliable manner without resorting to such expensive and complicated devices as have usually been proposed for this purpose.

Designs.

DESIGN FOR A HAND-MIRROR OR SIMILAR ARTICLE.—S. A. KELLER, New York, N. Y. The front face of the hand-mirror in this design shows a frame of circular form gracefully terminating in a handle in length about the diameter of the circle. The frame front and back is made beautifully ornamental by arrangements of flowers and leaves.

DESIGN FOR A FOUNTAIN-PEN HOLDER AND TRAY.—M. A. BENZIGER, New York, N. Y. Mr. Benziger has invented a new, original, and ornamental design for a fountain-pen holder and tray. The tray is oblong with rounded ends from each of which a foot extends. Four holders of different sizes are inserted in the tray in a slanting position to receive fountain-pens.

NOTE.—Copies of any of these patents will be furnished by Munn & Co. for ten cents each. Please state the name of the patentee, title of the invention, and date of this paper.

Business and Personal Wants.

READ THIS COLUMN CAREFULLY.—You will find inquiries for certain classes of articles numbered in consecutive order. If you manufacture these goods write us at once and we will send you the name and address of the party desiring the information. **In every case it is necessary to give the number of the inquiry.**
MUNN & CO.

Marine Iron Works. Chicago. Catalogue free.

Inquiry No. 7644.—For manufacturers of lathes for the making of boat oars.

For mining engines. J. S. Mundy, Newark, N. J.

Inquiry No. 7645.—For manufacturers of celluloid articles.

"U. S." Metal Polish. Indianapolis. Samples free.

Inquiry No. 7646.—For manufacturers of stump-pulling apparatus.

Drying Machinery and Presses. Biles, Louisville, Ky.

Inquiry No. 7647.—For manufacturers of serviceable portable engines suitable for sawing, etc.

Handle & Spoke Mchy. Ober Mfg. Co., 10 Bell St., Chagrin Falls, O.

Inquiry No. 7648.—For manufacturers of wire bookshelves.

Sawmill machinery and outfits manufactured by the Lane Mfg. Co., Box 13, Montpelier, Vt.

Inquiry No. 7649.—For manufacturers of malleable glass suitable for holding fish.

WANTED.—Purchaser for Monazite, Molybdenite and Wolfram. Apply Monasite, Box 773, New York.

Inquiry No. 7650.—For manufacturers of machinery for making excelsior.

I sell patents. To buy, or having one to sell, write Chas. A. Scott, 719 Mutual Life Building, Buffalo, N. Y.

Inquiry No. 7651.—Wanted, address of persons dealing in or manufacturing square steel tubing.

The celebrated "Hornsby-Akroyd" Patent Safety Oil Engine is built by the De La Vergne Machine Company, Foot of East 138th Street, New York.

Inquiry No. 7652.—For manufacturers of small experimental apparatus to order.

WANTED.—Ideas regarding patentable device for water well paste or mucilage bottle. Address Adhesive, P. O. Box 773, New York.

Inquiry No. 7653.—For manufacturers of knitting machinery for making hosiery; also machinery for making yarn for same.

I have for sale the U. S. and all foreign rights of new patent Improvements in Water Tube Types of Boilers. Great economizer. J. M. Colman, Everett, Wash.

Inquiry No. 7654.—For manufacturers of carding machines.

Manufacturers of patent articles, dies, metal stamping, screw machine work, hardware specialties, machinery tools and wood fibre products. Quadriga Manufacturing Company, 18 South Canal St., Chicago.

Inquiry No. 7655.—For manufacturers of porcelain ware.

WANTED.—A man of experience; capable of running a factory that is manufacturing heavy machinery. Should have $25,000 to invest in the business which can be shown to be profitable. We don't want the money without the man. The experienced man is the first essential. Address Heavy Machinery, Box 117, Station A, Hartford, Conn.

Inquiry No. 7656.—For manufacturers of soap-moulding presses.

Inquiry No. 7657.—Wanted, address of party dealing in elaterate bitumen.

Inquiry No. 7658.—For manufacturers of machinery for working quarry of marble, sawing, turning and finishing marble work.

Inquiry No. 7659.—Wanted, address of Diamond Bell Co., manufacturers of Eagle Auto Bell.

Notes and Queries.

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(9865) W. S. asks: 1. Why is twilight so much longer in England than in Spain or North Africa? Is it true that the period of twilight increases as we approach the poles, and if so, what is the cause of the increase? A. Twilight lasts till the sun is about 18 deg. below the horizon in the evening at any place. The sun in the torrid zone descends vertically in setting, and the duration of twilight is least in this region of the earth. The sun traverses 18 deg. in 1 hour and 12 minutes, which consequently is the shortest duration of twilight in the torrid zone all the year. The path of the sun makes the least angle with the horizon in the northern hemisphere in the summer, and hence a longer time is required to bring the sun 18 deg. below the horizon. Twilight then lasts about 2 hours in latitude 40 deg. north. On the Arctic circle the sun at the summer solstice just touches the northern horizon, and daylight lasts through the 24 hours. There is no night. At the north pole twilight is about 2½ months, or from the middle of January to March 22, when day begins. Duration of twilight can be calculated for any latitude at the sea level by trigonometry. At high altitudes above the sea twilight is said to be of shorter duration than at lower altitudes, due probably to the clearness of the air from dust. We have seen it stated that it is not more than twenty minutes at Quito. 2. Is there any means of determining the voltage and amperage of a current after passing through a Ruhmkorff's coil? Could you give approximately an idea of the voltage and amperage of a current which has passed through a coil that yields a spark of six inches, and that is worked by seven Grove cells (ordinary size)? A. The voltage required to force an electric discharge through air has been determined for various conditions. It is found to be different between needle points from what it is between balls. It varies also with the size of the balls. Between sharp points about 20,000 volts are represented in a spark one inch long, while for six inches about 72,000 volts are required. These voltages have been determined by experiments with alternating currents. With direct currents also many tests have been made, using batteries giving enormous pressures. 3. When lamps are lighted by electricity from alternate-current dynamos, how is it that the light appears constant and does not seem to flicker? I suppose commutators cannot be used with continuous-current dynamos. In the alternate-current machine does not the current enter the lamp alternately by opposite wires? A. An alternating current is the result of an alternating electromotive force, which is conceived to start from zero and rise to its highest point of voltage, then to fall through zero to a point as far below zero as it rose above zero, after which it returns to zero, thus making a cycle of changes. The polarity of the current is reversed while the E. M. F. is below zero. The fluctuation of lamps is not visible under such a current, because the changes are more rapid than the eye can take note of. The shortest interval of time the eye can note is about a tenth of a second, while the alternating current passes through 30 to 60 cycles per second. A commutator can be used with a continuous-current dynamo whose voltage is not too high and current is low enough. The transformation of a direct to an alternating current is usually made by a rotary converter or a motor dynamo. We furnish Sloane's "Electrician's Handy Book," which discusses all such matters, for $3.50 by mail.

(9866) C. O. B. writes: I send you this letter with inclosed salt formation, in the hope that I may get some explanation, published or otherwise, as to its cause. A. You inclose a very nice crystal of common salt, which is known in chemistry as sodium chloride. If you will dissolve some table salt in water and set the dish in a quiet place, such crystals will begin to form as soon as the solution becomes saturated by the evaporation of water. The crystal of common salt is a cube when it is formed without interference. Sometimes little baskets of crystals form, and float on the surface of the water, and are very beautiful when seen under a magnifying glass. The repetition of such experiments is very instructive and entertaining to the young people of a family.



"Star" Foot and Power Screw Cutting Automatic Cross Feed Lathes
FOR FINE, ACCURATE WORK
Send for Catalogue B.
SENECA FALLS MFG. CO.
695 Water Street,
Seneca Falls, N. Y., U. S. A.

Engine and Foot Lathes
MACHINE SHOP OUTFITS, TOOLS AND SUPPLIES. BEST MATERIALS. BEST WORKMANSHIP. CATALOGUE FREE
SEBASTIAN LATHE CO., 120 Culvert St., Cincinnati, O.



THE CLIPPER CLIP
Its triangular shape prevents entangling and gives three times the capacity of any other Clip for attaching papers together.
Best & Cheapest. All Stationers.
CLIPPER MFG. CO.,
401 West 124th St., New York, U.S.A.
BRASS OR STEEL
For free samples and information write to us.

PATENTS
Our Hand Book on Patents, Trade-Marks, etc., sent free. Patents procured through Munn & Co., receive free notice in the
SCIENTIFIC AMERICAN
MUNN & CO., 361 Broadway, N. Y.
BRANCH OFFICE: 625 F St., Washington, D.C.

The Best Dry Battery for AUTOMOBILE SPARKING
IS THE
Becko Spark Cell
4 Cells $1.25
J. H. BUNNELL & CO.
Electrical Manufacturers 20 Park Place, NEW YORK



Regal Marine Engines
Four-Cycle Automobile Type with Jump Spark Ignition. Single Cylinders, in 1½, 3 and 5 h. p. Double Cylinders, 8 and 15 h. p. Four Cylinders, 30 h. p. Also a superior line of Stationary Engines. It pays Engine buyers to read our free catalogue.
REGAL GASOLINE ENGINE CO.
50 W. Pearl St.,
COLDWATER, MICH.

ICE BOATS!
If you want to know how to make an Ice Boat, buy SCIENTIFIC AMERICAN SUPPLEMENT 1556. Complete working drawings and a thorough description are published. Order from your newsdealer or from Munn & Co., 361 Broadway, New York



THE BERKEFELD FILTER
The Standard of the World
The only filter removing typhoid and cholera baculi from the water. Tested and recommended by Bacteriologists all over the world. The greatest invention in the filter technic during the last ten years. The filter gives water in small and large quantities according to the sizes. Easily cleaned, filter cylinders sterilized by boiling in water. Send for circulars to
BERKEFELD FILTER CO.
4 Cedar Street, New York



FOR GUNSMITHS, TOOL MAKERS, EXPERIMENTAL & REPAIR WORK, ETC.
From 9-in. to 13-in. swing. Arranged for Steam or Foot Power, Velocipede or Stand-up Treadle.
Send for Lathe Catalog.
W. F. & JNO. BARNES CO.
Established 1872.
1999 Ruby St., ROCKFORD, ILL.



Manufacturers should investigate the
B. F. BARNES MACHINE TOOLS
before placing orders. The Tool here illustrated is our 20-inch Drill, and we have many other sizes to make a very complete line, including Multiple Spindle Drills. If interested in the latest Tools for reducing costs of production, let us tell you what we have. Ask for Catalog S.
B. F. BARNES CO. Rockford, Ill.
European Branch
149 Queen Victoria St., London, E. C.

How To Increase Your Business

READ carefully, every week, the **Business and Personal Wants** column in the
Scientific American
This week it will be found on page 14.
Some week you will be likely to find an inquiry for something that you manufacture or deal in. A prompt reply may bring an order.
Watch it Carefully

(9867) J. E. W. asks: 1. If at the equator a hole 2 feet wide pierced the earth through its center, and a ball a half inch in diameter were dropped into the hole, I figure that in about nine and one half seconds, and at a depth of about 1,440 feet the ball would impinge against the east side of the hole, because at that depth the earth would be revolving a little over one-tenth of an inch slower than at the surface; and from that point down to the center the continually decreasing speed of revolution would cause the ball to press continually against the east side. Supposing, now, that there were neither air nor friction to retard the ball, would it acquire the same velocity as if it could have fallen without touching the side; and would it rise again to the opposite surface of the earth? A. The best experiments to determine the easterly deviation of falling balls, according to Prof. Young in his "College Astronomy," showed from 160 trials, a deviation of 1.12 inches in a fall of 520 into a mine. If a ball were dropped into a hole in the earth it would in time come against the side of the tube and roll down to the center of the earth and pass some distance beyond the center. How far no one can tell, since it depends entirely upon the degree of friction upon the sides of the hole. It could not rise as far as it had fallen, since it could not pass the center with the full velocity due to free fall. 2. If the earth were a hollow sphere inclosing a vacuum, and a rock fell from the inner side, would it not gradually assume a convolute course till it reached a point where its increasing momentum would equal the earth's decreasing attraction, and at that point begin to revolve in a circular orbit? If so, at what depth would this occur? A. If the earth were a hollow shell a rock which had become detached from its interior surface could not fall at all. A body anywhere within such a shell is equally attracted in all directions and has no weight. This is usually demonstrated in text books of mechanics. 3. In such a sphere a ball falling from either pole would go to the center direct and rise again to the opposite pole; but if as in the case of the earth, the poles themselves had a slight rotatory motion in space, would not the ball be gradually deflected into a circular orbit? A. A ball falling along the polar axis of the earth would not be deviated at all in the time required to fall from the surface to the center of the earth, since the deviation of the pole is very slow and very small.

NEW BOOKS, ETC.

DYNAMO, MOTOR, AND SWITCHBOARD CIRCUITS. By W. R. Bowker, C.E. New York: D. Van Nostrand Company, 1904. 8vo.; pp. 120. Price, $2.25 net.

The present work is not intended as a theoretical textbook, but is intended as a practical handbook for electrical engineers and artisans. The diagrams are conspicuous by their great clarity.

THE TEMPERATURE-ENTROPY DIAGRAM. By Charles W. Berry. New York: John Wiley & Sons, 1905. 12mo.; pp. 134. Price, $1.25.

Students of thermodynamics will value this treatise by an instructor in mechanical engineering at the Massachusetts Institute of Technology. The subject is dealt with mathematically with the aid of diagrams It will prove a valuable addition to the literature of the subject.

CONCRETE. Edited by John Black. London: John Dicks. New York: Industrial Publication Company. N. D. 16mo.; pp. 94. Price, 20 cents.

ARTIFICIAL STONE, ETC. Edited by John Black. London: John Dicks. New York: Industrial Publication Company. N. D. 16mo.; pp. 92. Price, 20 cents.

THE DELUGE AND ITS CAUSE. By Isaac Newton Vail. Pasadena, Cal. N. D. 16mo.; pp. 133.

METALLURGIA DELL' ORO. By Emilio Cortese. Milan: Ulrico Hoepli, 1904. 32mo.; pp. 262.

METALLI PREZIOSI. By Antonio Linone. Milan: Ulrico Hoepli, 1901. 32mo.; pp. 315.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending December 26, 1905

AND EACH BEARING THAT DATE

[See note at end of list about copies of these patents.]

Abdominal supporter or bandage, W. R. Cartledge	808,433
Acid, making guanyl dialkyl barbituric, B. R. Seifert	808,407
Adjustable table, C. H. Gardinier	808,534
Aerating device, liquid, W. M. Venable	808,411
Alloy, silver, A. E. Hobson	808,453
Alternator, magneto, L. J. Le Pontois	808,552
Alternator, self exciting, L. J. Le Pontois	808,555
Annunciator, L. G. Woolley	808,135
Automatic lubricator, W. H. Decker	808,197
Automatic switch, J. M. Comer	808,231
Automobile jack, L. R. Maxwell	808,208
Automobiles, power transmission mechanism for, C. G. Simonds	808,220
Awning box, E. T. Meakin	808,294
Axle, car, W. A. McCormick	808,301
Bag, J. Rogers	808,170
Bag holder, J. O. Ellison	808,355
Bag mouth closure, T. J. Palmer	808,110
Balance, specific gravity, F. M. Williams	808,421
Baling press, P. J. W. Heldt	808,153
Banana shipping case, F. Schmitz	808,313
Barrel hoop, T. E. White	808,496
Barrel metal, H. Wehrhahn	808,327, 808,413
Barrel or keg washers, barrel or keg rolling device for, F. P. Pfeil	808,305
Barrel, sectional metal, G. Klenk	808,548
Battery. See Thermo electric battery.	
Bed bottom, J. Hoey	808,369
Bed corner fastening, metal, J. M. Adams	808,501
Beehives, super for, W. W. Dempsey	808,144
Beer cooler, R. S. Wiesenfeld	808,131
Beer cooling and dispensing apparatus, T. D. Smith	808,582
Bell or gong, electric, G. E. Dunton	808,277
Bell, pneumatic signal, J. H. Brady	808,137
Belt shifter, H. J. Hoegh	808,088
Bill receipting machine, R. S. Hampton	808,541
Bin, Hopkins & Canfield	808,089
Binder, loose leaf, L. K. Thibodeaux	808,492
Binders, locking device for loose leaf, R. B. Wilson	808,267
Binders, locking device for loose leaf, G. T. Dalton, Sr	808,347
Blind or shutter opener, G. E. & J. K. Dixon	808,519
Blind slat antirattler, J. J. Hargraves	808,363
Blowpipe, oxyhydrogen, F. Jottrand	808,382
Boat collapsible or folding, C. H. Paine	808,302
Boats from their falls at both ends simultaneously, means for releasng, G. S. A. Ranking	808,575
Boiler, J. E. Grace	808,284
Book ring with lock joints, L. M. Morden	808,248
Bottle, H. R. Lovejoy	808,559
Bottle, fraud preventive, A. J. K. Genella	808,280
Bottle, non-refillable, H. W. Lloyd	808,462
Bottle, non-refillable, H. L. Norman	808,469
Bottle wrapper making machine, W. Dichmann	808,348
Bottles and other receptacles, nozzle stopper for, T. W. Evans	808,278
Bottles, apparatus for applying stoppers to, W. E. Lindsay	808,556
Bowling alley foul line, P. W. Edwards	808,147
Bracelet, W. Wallenthin	808,322, 808,323
Brake shoe, J. G. Johnston	808,379
Bridge gate, J. Fowler	808,531
Briquets, manufacture of, Simpkin & Ballantine	808,483
Buckle, W. Griest	808,538
Buffing machine, J. M. Sellmayer	808,482
Buggies and other vehicles, storm shield for, Laune & Shelden	808,288
Building block, T. H. Brown	808,431
Bundle carrying device, E. Frantzich	808,080
Button, shirt and collar, G. Schier	808,312
Cabinet, J. M. Rhodes	808,169
Cable haulage and carrier transfer, T. Alexander	808,183
Cable traction wheel, T. Alexander	808,063
Calcium, production of metallic, Borchers & Stockem	808,066
Can filling machine, D. W. Rathbone	808,216
Can submerger, cream, L. Kleiber	808,093
Can tester, J. A. Diesel	808,145
Canopies, staff head for, W. J. Slyder	808,315
Canopy, E. A. Pier	808,476
Canvas tightener, J. Tanck	808,122
Capsule cleaning device, O. E. Mueller	808,299
Car brake, C. H. Shaner	808,314
Car brake beam, railway, G. L. Warren	808,325
Car coupling, J. Anson	808,593
Car door, grain, W. H. McMachen	808,566
Car platforms, folding door for, H. Witte	808,329
Car, railway, F. W. Chriswell	808,342
Car stake, J. R. Wheeler	808,129
Cars, automatic coupling for railway, A. A. Rosengren	808,310
Cars, electric signal system for electric, E. J. Adams	808,182
Cars with wheel frames, device for connecting the upper parts of, C. V. von Nolle	808,251
Carbon, making chlorids of, F. J. Machalske	808,100
Carpet stretcher and tacker, Tattrie & Schmidt	808,123
Carriers, folding step for public, Felkner & Butler	808,076
Carving machine, F. H. Richards	808,478
Casing spear, automatic rotary hydraulic, H. G. Johnston	808,378
Casks, tilting support for, Miller & Lawrence	808,104
Castor, roller-bearing, F. R. Wolfinger	808,500
Cattle guard, W. Edwards	808,522
Cattle guard and gate, Felkner & Butler	808,077
Cement fence posts and the like, mold for, J. J. Luck	808,394
Chair. See Folding chair.	
Chenille twistng and receiving machine, L. Brandt	808,337
Chimney cap, C. W. Eckhart	808,075
Cigars to banding mechanisms, mechanism for feeding, W. C. Briggs	808,067
Clay-screen, N. Allen	808,590
Clothes pin, F. H. Perry	808,304
Clutch, A. Lee	808,289
Clutch controller, magnetic, E. H. Anderson	808,226
Coin detector, E. de Kleist	808,243
Collar and cuff, pyroxylin, J. A. Osborne	808,472
Collar, horse, E. G. Williams	808,498
Collar, storm, F. Horak	808,543
Collars, cuffs, and the like, apparatus for making pyroxylin, J. A. Osborne	808,473
Commutator motor, Arnold & La Cour	808,064
Compass joint, H. Kern	808,205
Compasses, alidade or indicator for ships, H. P. Arbecam	808,270
Container top, J. R. Harbeck	808,362
Control system, emergency, F. E. Case	808,271
Controller, automatic level, L. Neu	808,471
Controlling system, T. von Zweigbergk	808,268
Coop, chicken, C. Hoskins	808,156
Cores, machine for removing and cutting material from, J. B. M. V. Rottinger	808,578
Corn husker, G. Meader	808,465
Corn husking machine, L. G. Vandegrift, Jr.	808,264
Cotton chopper, Butler & Felkner	808,069
Cotton chopper, Felkner & Butler	808,078
Coupling, Gill & Titus	808,446
Crate, shipping, A. A. Stalecker	808,583
Cream ripener, T. L. Valerius	808,319
Cream ripeners and the like, cover for, T. L. Valerius	808,320
Cream ripening apparatus, T. L. Valerius	808,321
Crupper attachment, C. H. Crandall	808,514
Cultivator attachment, G. W. Holmes	808,155
Currents for the ignition of explosive mixtures, apparatus for generating and utilizing polyphase alternating, L. J. Le Pontois	808,554
Curtain fixture, W. E. Batchelder	808,185
Curtain pole and shade roller hanger, M. A. Elliott	808,354
Damper regulator, furnace, W. F. Pickle	808,211
Decorating device, W. H. Deidrick	808,439
Dentifrice, G. W. Morse	808,105
Desk bracket, A. R. Fergusson	808,602
Die stock, F. V. Anderson	808,592
Display card, E. E. Blakeslee	808,596
Display truck, couch, J. Bochnewetch	808,229
Dough raiser, Barnes & Edelman	808,184
Drafting instrument, A. C. Cochran	808,511
Drill feed, J. G. Winger	808,499
Driving mechanism, C. W. Sponsel	808,120
Dry docks, bilge block for, J. L. Crandall	808,072
Drying apparatus, F. M. Schaffer	808,481
Dust guard, Lauritzen & Cook	808,550
Dyeing, indigo, H. Muller	808,398
Egg beater, G. C. Parish	808,613
Egg sheller, L. V. Blue	808,507
Egg tester, J. S. Shoemaker	808,117
Electric circuits of high inductance, protective shunt for, W. S. Horry	808,371
Electric machines, end connection for dynamo, F. H. Jeannin	808,241
Electric motor, direct intermittent current, C. M. Palmer	808,303
Electric switch, S. H. Beck	808,065
Electric switch, W. S. Horry	808,364
Electric switch, W. W. Lathrop	808,392
Electrical connection, detachable, A. N. Lawrence, Jr.	808,096, 808,097
Electrical meter, H. W. Sayles	808,115
Electrolytic meter, A. L. R. Ellis	808,232
Elevators, etc., device for detaching loads from, Mackrow & Cameron	808,291
Embalmers' use, arm-rest and bottle-support for, W. R. Sparkman	808,485
Emergency brake, W. M. Gooch	808,234
Enameling, J. H. Hines	808,542

End gate and shovel board, G. M. Luscombe	808,395
Energy through space, apparatus for the transmission of, A. Artom	808,594
Engine. See Explosive engine.	
Engine cylinders, radiators, etc., air-cooling construction for, W. B. Swan	808,490
Engine frames, machine for facing pedestal legs of locomotive, G. T. Moore	808,563
Envelop fastener, E. B. Stimpson	808,489
Envelop, mailing, E. U. Kimbark	808,546
Excavator, A. N. Cross	808,345
Exploding mine charges, apparatus for, C. I. Dodson	808,275
Explosive engine, vertical, A. Winton	808,423
Eyeglasses, S. Ward	808,412
Fabric spreading machine, C. Wiebke	808,130
Fan, H. Loewner	808,610
Fan, rotary, Slear & Arnold	808,174
Feed water heater, F. H. Trevithick	808,178
Feed water heater, C. Kieren	808,385
Fence post, G. I. Griggs	808,539
Fertilizer distributer, C. S. Tarkington	808,491
Fertilizer distributer and seed planter, D. W. Strickland	808,262
Filaments from viscose, etc., apparatus for producing or forming, C. A. Ernst	808,149
Filaments from viscose, etc., forming, C. A. Ernst	808,148
File for papers or cards, E. W. Woodruff	808,225
Fire extinguisher, automatic, H. W. Martin	808,101
Fire fighter's apparatus, W. W. Thompson	808,587
Fire tube boiler, E. Eberhardt	808,353
Firearm, H. M. Putnam	808,214
Firearm, G. Luger	808,463
Fireplace, T. A. Hill	808,154
Fish catching apparatus, L. P. Mattle	808,102
Fish hook, H. A. Homan	808,239
Fish hook, J. T. Haines	808,285
Fluid elevating apparatus, G. Reiter	808,218
Fluids and other materials, device for controlling the flow of, L. Dion	808,351
Folding chair, adustable, W. S. Lewis	808,098
Foot, artificial, F. W. Merrick	808,296
Freight and baggage loader, J. McGann	808,166
Fruit cutter and pitter, K. T. Lynn	808,464
Furniture handle, G. Frank	808,533
Fuse, J. E. Graybill	808,200
Game apparatus, J. L. E. Pell	808,111
Game apparatus, H. E. Le Jeune	808,207
Gas generator, H. A. Hartman	808,365
Gas or gasolene engine, J. Palmer	808,572
Gas producer, E. Korting	808,244
Gas regulator or governor, G. Reasner	808,403
Gate and means for supporting, operating, and fastening the same, G. B. Gould	808,283
Gear, speed changing, C. G. Simonds	808,221
Gear, transmission, B. H. Pomeroy	808,306
Glass, clamp for carrying plate, J. Hunter	808,202
Glass drawing machine, G. H. Harvey, reissue	12,427
Glass furnace, J. A. Frank	808,358
Grader, road, W. Alcorn	808,332
Grain separator, L. H. Livingston	808,557
Grate, W. C. Engel	808,523
Grate, forced draft, A. D. Southam	808,119
Grease cups, making, E. A. Thiem	808,177
Grindstone hanging and centering device, J. H. Norrell	808,570
Gun, C. A. T. Sjogren	808,118
Gun barrel, O. Johnson	808,203
Gun, magazine, E. A. McKeen	808,107
Guns, wrought metal forearm for tubular magazine, T. C. Johnson	808,375
Hammer, power, F. P. Polaski	808,256
Harvester, beet, L. Gettelmann	808,281
Hat brim pouncing machine, F. B. Husk	808,373
Hay carrier apparatus, W. Louden	808,558
Hay loader, H. O. Culver	808,073
Hay rake, F. R. Children	808,140
Heating and vulcanizing, etc., apparatus for, H. S. Riddle	808,479
Heating pipes, rods, or similar bodies, G. H. Benjamin	808,186
Hinge, A. R. Carroll	808,138
Hinge, I. N. Morford	808,165
Hinge, spring, Van Wagoner & Pomeroy	808,126
Hoist and similar apparatus, P. J. Darlington	808,273
Hoisting and conveying apparatus, Miller & Dickinson	808,246
Hoisting apparatus, portable, Coffman & Carter	808,196
Holdback fastening, O. C. Davis	808,493
Hook. See Fish hook.	808,601
Horn, C. H. Foster	808,530
Horse-detacher, C. H. Bach	808,595
Horseshoe, J. W. Cole	808,436
Hose clamp, Gergersen & Parr	808,444
Hose coupling, H. A. Schroeder	808,219
Hose spider, C. M. Bowman	808,508
Hub, metal wheel, J. J. Burns	808,192
Hydrocarbon burner, B. Q. P. Foss	808,529
Ice creeper, J. D. Holt	808,370
Igniting combustible mixtures, L. J. Le Pontois	808,553
Ignition device, L. J. Le Pontois	808,551
Induction meter, A. J. Frager	808,532
Insect trap, G. Laube	808,460
Instep support, G. H. Cummings	808,515
Insulator, third rail, S. B. Stewart, Jr	808,222
Internal combustion engine, E. S. Palmbla	808,210
Internal combustion heat engine, J. L. Bogert	808,336
Jock strap, W. F. Ware	808,495
Journal bearing, G. N. Sceets	808,172
Journal bearings, lubricating, W. Lahey	808,388
Journal box, J. S. Patten	808,573
Journal box dust guard, G. L. Mansfield	808,292
Keyboard for stringed instruments, G. P. Buchanan	808,510
Knitting machine, E. Lippitt	808,099
Knitting machine, dial, Stafford & Holt	808,121
Knitting machines, electric stop motion for, A. L. Patterson	808,475
Ladder, mobile step, J. S. Padon	808,252
Ladder, step, J. S. Tilley	808,124
Lamp bracket, H. Salsbury	808,480
Lamp, electric glow, G. K. Hartung	808,085
Lamp globes and shades, set screw for, T. G. Luson	808,290
Lamp, incandescent gas, H. B. Cox	808,513
Lamp shade holder, electric, Joseph & Ehrenreich	808,381
Lamps, fuel saving attachment for incandescent, L. Rabinoff	808,215
Latch attachment, door, J. S. Johnson	808,376
Lead hydrate, making, G. D. Coleman	808,141
Leaded light, W. T. & A. A. Gibbs	808,445
Lettering guide, Wilson & Maeulen	808,442
Level, Hunter & Callahan	808,372
Lifting jack, F. Gardisky	808,535
Lighter, automatic, A. R. Weisz	808,128
Liquid separator, centrifugal, C. M. Ketcham	808,092
Loading device, B. A. Foust	808,357
Locking device, S. W. Bonsall	808,188
Locomotive pedestals, locking wedge bolts on, G. W. Wear	808,127
Loom electric stop motion mechanism, J. B. Whitney	808,416 to 808,418
Looms, trailing filling end clearer for, Draper & Northrop	808,146
Lumber unloading mechanism, J. M. Ferriss, Jr.	808,527
Mail delivering crane, C. E. Teeter	808,317
Mail distributing rack, Thomas & Creech	808,318
Mandrel, lathe, C. J. Reed	808,257
Match lighter, Barnum & Harris	808,136
Matrices, standardizng or measuring machine for, F. H. Pierpont	808,112
Mattress, wire, J. R. Cardwell	808,340
Measuring device for corsets, E. P. Follett	808,233
Measuring instrument, E. Schattner	808,259
Mechanical movement, E. M. Patten	808,253
Mechanical movement, F. H. Richards	808,404
Medicines or other substances, holder for, V. & C. Driskell	808,520
Metal matrices, separating the galvanoplastic deposits from, E. Albert	808,331
Metals, galvanizing, G. L. Meaker	808,103
Metallurgical furnace, G. H. Benjamin	808,187
Meter, G. H. Fristoe	808,150
Milk can, H. Wehrhahn	808,326
Mine door, A. C. Urban	808,125

Keystone Well Drills



for Artesian and Ordinary Water Wells; Mineral Prospecting and Placer Testing for Dredgers; Deep Drilling for Oil and Gas; Contractor's Blast Hole Drilling, River and Harbor Exploration, etc. **Our five catalogs are text-books on these subjects.**

KEYSTONE WELL WORKS
Beaver Falls, Pa.

Does Every Charge Ignite?

Every gas engine owner who depends on batteries for his current, knows what ignition troubles are. Our **Apple Automatic Sparker** on your machine will end these troubles forever. No Switches. No Belts. No Batteries for starting or running. 80 articles for ignition purposes. New York and Chicago Auto Shows. **The Dayton Elec. Mfg. Co.,** 98 Beaver Bldg., Dayton, Ohio.

Write to-day

Catalog free with full information

MOTSINGER AUTO-SPARKER
starts and runs Gas Engines without Batteries.

No other machine can do it successfully for lack of original patents owned by us. No twist motion in our drive. No belt or switch necessary. No batteries whatever, for make and break or jump-spark. Water and dust-proof. Fully guaranteed.

MOTSINGER DEVICE MFG. CO.
14 Main Street, Pendleton, Ind., U. S. A.

BARKER MOTORS

Reliable.--1¼ to 10 H. P--Economical



Their perfect operation and reliability are due to common sense mechanical ideas and good construction. While low in price, they are made of best materials with careful attention to details.

C. L. BARKER, NORWALK, CONN.

Power Wire Rope

SAINT LOUIS — GRAND PRIZE WIRE ROPE — WORLD'S FAIR

MOST POWERFUL WIRE ROPE MADE

BRODERICK & BASCOM ROPE CO
ST. LOUIS MO



The Genuine Armstrong's STOCKS and DIES

Acknowledged to be the best. Different sizes and capacities. Write for catalog.

THE ARMSTRONG MFG. CO., Bridgeport, Conn.
New York Office, 139 Centre Street

The "HAMMOND"

All Languages in any Style of Type on one and the same Machine.

Any width paper may be used on the **Hammond.**

VISIBILITY is NOT a NEW FEATURE with the HAMMOND. It HAS BEEN a VISIBLE WRITER for 20 years. WAS THE ORIGINAL.

THE HAMMOND TYPEWRITER COMPANY
New York Sales Office, 167 Broadway

Wizard Repeating LIQUID PISTOL

Will stop the most vicious dog (or man) without permanent injury. Perfectly safe to carry without danger of leakage. Fires and recharges by pulling the trigger. Loads from any liquid. No cartridges required. Over **6** shots in one loading. All dealers, or by mail, **50c.** Rubber-covered holster, **5c.** extra.

Parker, Stearns & Co., 226 South St., Dept. G, New York

THE MIETZ & WEISS OIL ENGINES



Sizes from 1 to 60 H. P

Send for Catalogue.

Operated by Kerosene Oil, Fuel Oil, Distillate. Safest, Simplest, Most Economical and Most Reliable Power on the market.

Highest award for Direct Coupled Oil Engines and Generator, Paris Exposition, 1900. Gold Medals, Pan American Exposition, 1901, Charleston Exposition, 1902. Gold Medal and Special Diploma, Louisiana Purchase Exposition, St. Louis, Mo., 1904.

AUGUST MIETZ
128-138 Mott St., New York, U.S.A.
Catalogue Dept. **24.**

Used by forty of the leading Automobile and motor boat manufacturers. **Suitable** for any gas or gasoline engine using make and break or jump spark ignition.

EVERY BATTERY GUARANTEED to give satisfaction or purchase money refunded.

WITHERBEE IGNITER CO.
27-31 Thames St. - - NEW YORK

$3.00 A YEAR

July, 1905, Cover

PUBLISHERS' NOTICE

American Homes and Gardens

PUBLISHERS' NOTICE

$3.00 a year; or, with the SCIENTIFIC AMERICAN, $5.00 a year.
Measures 10½ x 14 inches. 72 Pages. Colored Cover.

¶ This is a thoroughly practical magazine, dealing with the home and its surroundings. An ideal journal dealing not only with buildings but with country life as well. The aim of the magazine has been to stimulate among its readers a wider interest in the beautifying of the home. The articles deal with not only the house exterior but the interior plans and arrangements and the subject of decoration as well. The garden, as an adjunct or frame of the mansion, receives its full share of attention, and each issue contains examples of artistically planned gardens, large and small, old and new. There will be published in each issue some large estate, and the reader will be taken over the buildings and grounds as a visitor. There will also be published articles dealing with all phases of practical country life.

$3.00 A YEAR

January, 1906, Cover

DURING 1906 ARTICLES WILL BE PUBLISHED SHOWING

How curtains may be made at home;
How furniture may be covered by the woman of the house;
How the amateur may decorate the room with home-made stencils;
How a water garden may be laid out and built;
The use of statuary for garden decoration.

A Sheraton Sideboard in a New England Home

A MINIATURE ENGRAVING

ALSO DURING 1906 ARTICLES WILL BE PUBLISHED ON

The kitchen and how it should be planned (a series);
Historical places in America;
The house of the Colonial period;
Gateways to estates;
How the house of a bygone day may be remodeled and converted into a modern home.

¶ The magazine is beautifully printed on heavy coated paper, and is elaborately illustrated by handsome engravings made from photographs taken especially for this publication. The colored covers change monthly (see reduced black and white specimens above). AMERICAN HOMES AND GARDENS should have a place in every home. Send $3.00 to-day and receive the beautiful November and December issues without charge. Single copies, 25 cents, postpaid, or they can be obtained from any newsstand.

MUNN & COMPANY, Publishers, SCIENTIFIC AMERICAN OFFICE, 361 BROADWAY, NEW YORK

Hydrozone

Cures

Sore Throat

A Harmless Antiseptic.

Endorsed by the medical profession. Send ten cents to pay postage on **free trial bottle.** Sold by Leading Druggists. Not genuine unless label bears my signature:

Prof. Charles Marchand

Dept. U, **63 Prince St., N. Y.**

Write for free booklet on Rational Treatment of Disease.

$5.00 Water Motor $3.50

Morton's $5 Divine Faucet Water Motor for a limited time $3.50, complete. Guaranteed. Attached to any faucet. For polishing, sharpening and grinding. Runs all kinds of light machines like washing and sewing machines. Largest and most powerful water motor. Outfit includes emery wheel, buffing wheel, wooden pulley, and polishing material. Money refunded if not satisfactory—none C.O.D. Order now, or write immediately for free booklet.

MORTON MFG. COMPANY, Dept. C, 130 Fulton Street, New York.

Another Good Thing from the Goodell-Pratt Shops.

RECIPROCATING AUTOMATIC DRILL

Useful for drilling holes where Braces, Breast Drills or Hand Drills are inconvenient. Maximized Power and Minimized Friction. *Catalogue tells all—free.*

GOODELL-PRATT COMPANY, Greenfield, Mass.

Let Me Sell YOUR PATENT

Booklet explaining how mailed **FREE.** Fifteen years' experience Patent Sales exclusively. If you have a **Patent** for sale, call on or write

WILLIAM E. HOYT
Patent Sales Specialist
290 C, Broadway, N. Y. City

NEW YORK SCHOOL OF AUTOMOBILE ENGINEERS
Incorporated
147 West 56th Street, New York City
Under the personal direction of
PROF. CHAS. E. LUCKE, M. E., Ph.D.
School of Engineers, Columbia University

Departments include machine tool and forge shops, assembling and test shops, and every type of motor; also laboratories completely and specially equipped to teach all component parts of automobiles.

Day and Evening Classes.
SPECIAL COURSES FOR OWNERS.

THE Nulite Vapor GAS Lamps

For Home, Store and Street

We also manufacture Table Lamps, Wall Lamps, Chandeliers, Street Lamps, Etc. 100 Candle Power seven hours ONE CENT. No Wicks. No Smoke. No Odor. Absolutely safe. THEY SELL AT SIGHT. Exclusive territory to good agents. ☞ Write for catalogue and prices.

Chicago Solar Light Co. Dept G, Chicago

Automobile Knowledge means Money in Your Pocket

We are the only school that provides complete, practical, *money-earning* and *money-saving* training by mail in operating, repairing, constructing and designing every kind of motor vehicle and motor boat.

We have special courses for *owners*, shop and factory *employees, chauffeurs, motor-boat* and *motor-cycle users*, and *others.*

There are only two ways of learning anything. One is slowly and tediously to gain the experience yourself; the other (and better) way is to take advantage of the experience of others.

Though we offer you the long, hard-learned, thorough experience of experts who have done prominent work in the development of the new vehicle, we offer this experience in such form that to teach it to you will take only a few minutes and cost only a few cents each day—*the few minutes and the few cents that you ordinarily waste.*

Our instruction has been prepared and is conducted by well-known men, of long experience and proved ability both in automobile engineering and correspondence instruction. It is strongly endorsed by *prominent manufacturers, club* and *association officials, racing men, trade-paper editors*, and others whose standing in the automobile field lends authority to what they say.

In the automobile industry, the demand for competent men is so great that ability, no matter how acquired, is considered above "pull" and length of service. This makes it easy for an ambitious man to qualify quickly for good wages and prompt advancement.

For further information, send us your name on the accompanying coupon. This will cost you only a moment of time and a postage stamp, which will be well spent for interesting and convincing literature.

FILL OUT TEAR OFF MAIL TO-DAY

THE CORRESPONDENCE SCHOOL of AUTOMOBILE ENGINEERING
Suite 1368 Flatiron Building, New York City

Please send to my address by return mail, a free circular, giving full particulars of your correspondence courses,

Name.....

Street and No.....

City..... State.....

Or write for circular without sending coupon.

Mine skips, cages, lifts, and the like, safety device for, J. Wilshir	808,328
Mold, E. F. Nevins	808,167
Molding, A. M. Hewlett	808,368
Molding apparatus, A. M. & M. J. Hewlett	808,367
Motor. See Commutator motor.	
Motor, D. Anderson	808,269
Motor governing device, C. Koerner	808,549
Multirate meter, W. C. Fish	808,279
Musical instrument, E. G. James	808,374
Must distributing apparatus, E. T. Meakin	808,397
Non-freezing tank, O. J. Fabian	808,441
Oil cake cooling and drying apparatus, A. W. French	808,081
Ore concentrating apparatus, X. St. Pierre	808,584
Ore grinding, crushing, washing, and separating apparatus, combined, R. Stanley	808,488
Ores, roasting, H. Haas	808,361
Organic compounds by oxidation, manufacture of, W. Lang	808,095
Packing, metallic, E. J. Fuller	808,082
Packing, piston rod, C. L. Cook	808,512
Paper machine press roll, E. Burke	808,338
Paving compositions, apparatus for mixing, G. W. Crichfield	808,599
Pea hulling machine, E. H. McMurry	808,568
Peanut picker, Ferguson & Benthall	808,442
Pen reservoir attachment, H. R. Chubb	808,272
Penholder, F. B. McDonald	808,469
Penholder, E. E. Blakeslee. 808,504, 808,505,	808,597
Pencil tip, J. S. McConnell	808,300
Perforating machine, G. H. Davis	808,274
Phonograph repeating mechanism, C. J. Kurtz	808,387
Photographic shutters, apparatus to be used in measuring the speed of, A. Kershaw	808,384
Piano actions, pianissimo device for, C. G. Bothner	808,190
Piano pedal, D. C. Greene	808,449
Piano players, key striking lever for, F. P. Smith	808,484
Pile driver, A. E. Williams	808,132
Pillow, O. F. Reich	808,217
Pipe coupling, H. F. Kraver	808,457
Pipe perforator, E. R. Graham	808,235
Pliers, differential, J. L. Knight	808,206
Plow, A. A. Frey	808,359
Plow, W. S. Graham	808,605
Potato digger, J. F. Shefferly	808,615
Power transmitting mechanism, E. Thomson	808,263
Power transmitting mechanism, W. R. May	808,560
Printing press addressing attachment, J. P. Bryan	808,191
Printing press inking apparatus, C. P. Cottrell	808,344
Printing press, traveling cylinder, J. T. King	808,455
Printing surfaces, mechanism for preparing, B. A. Brooks, reissue	12,426
Printing with indigo, M. von Gallois	808,443
Propelling mechanism, boat, P. E. Crowe	808,346
Pulley mechanism, reversible, Ricks & Stifel	808,309
Pulp and paper machinery, H. Parker	808,614
Pump, self balancing centrifugal, E. E. Kretzschmar	808,608
Punching bag, Finney & Lantz	808,528
Punching machine, W. Sparks	808,408
Punching tool, T. McGrath	808,470
Puzzle, J. S. Nicholson	808,209
Radiator, steam condenser, and the like, F. Lamplough	808,389
Rail fastening for plastic ties and making same, H. E. Percival	808,401
Rail joint, Barton & Lamoreaux	808,503
Rail joint, J. W. & E. J. Enright	808,524
Rail joint, C. J. Shea	808,580
Railway, G. Sell	808,116
Railway, pleasure, C. B. Stahl	808,487
Railway rail, S. R. Fry	808,151
Railway rail joint, H. C. Brewster et al	808,509
Railway signal, electric, B. A. Karr	808,159
Railway signaling, S. D. Strohm	808,223
Railway switch, L. L. Lake	808,459
Railway switch and signal mechanism, C. M. Hurst	808,157
Railway switch operating device, street, A. J. Molina	808,298
Railway system, electric, W. G. Keeler	808,545
Railways, contact shoe for third rail electric, W. B. Potter	808,213
Ram, hydraulic, A. H. Francfort	808,604
Razor, safety, W. M. Kellum	808,287
Reeling machine, Wyckoff & Wilkes	808,424
Refrigerator, J. Dick	808,349
Registers, holder for hotel, J. G. Williams	808,181
Riding frame for implements, A. Q. Plummer	808,574
Ring. See Book ring.	
Road making, J. C. Butterfield	808,339
Roasting furnace, F. E. Marcy	808,293
Rock drill of the percussion type, Johnson & Pearson	808,377
Rope socket, ratchet swivel, E. Double	808,199
Rotary motor, high speed, P. Philippon	808,255
Sad iron, A. T. Beach	808,428
Saddle, harness, W. L. Kellerman	808,160
Sanding machine, E. Tyden	808,180
Sash opener and fastener, H. B. Synar	808,586
Saw, C. A. King	808,547
Scale, computing, M. A. Dees. 808,516 to	808,518
Scale, weighing, H. Greenberg	808,448
Scale, weighing, P. Lewitz	808,609
Screw press, continuous, J. F. Bussells	808,193
Seal or closure, bottle, C. E. McManus	808,567
Sealing apparatus, bottle, G. H. Gillette	808,536
Seed measuring and packaging machine, J. E. W. Tracy	808,588
Sewing looped fabrics, machine for, O. Lange	808,390
Sewing machine bobbin ejector, P. Anschutz	808,502
Sewing machine shuttle, K. Mischke	808,164
Shade fastening, F. Weilert	808,414
Shade guide, window, E. C. Jordan	808,242
Sharpener, lawn mower, J. Chesbro	808,434
Sharpening machine knife, J. A. Stansbury	808,260
Shears, tension device for, E. J. Newton	808,612
Sheet perforating machine, H. K. Sandell	808,311
Shelf rod, adjustable, M. F. Miller	808,611
Shingling apparatus, house, G. Sampson	808,171
Shoe filling apparatus, W. B. Arnold	808,227
Shoes, filling, A. Thoma	808,224
Show window, G. T. Hadley	808,201
Shredding machine, M. F. Williams	808,133
Shutter bar, J. W. Tripp	808,410
Shuttle, F. Ott	808,474
Sign for wire fences, G. L. Goetz	808,447
Signaling apparatus circuit, electric, F. B. Herzog et al.	808,087
Signaling device, F. F. Coggin	808,435
Signaling system, M. W. Hamblin	808,451
Signaling system, electric, Otwell & Melvin	808,571
Silk filaments, apparatus for lustering and finishing, E. Pohl	808,402
Skirt supporter, J. M. Roberts	808,576
Sled, traction, J. McGillis	808,565
Small arm, breech loading, P. T. Godsal	808,282
Snap hook, Lapsley & Sallee	808,391
Spade or shovel, J. W. Reed	808,168
Spark arrester, F. H. Trevithick	808,179
Spark arrester, S. Amick	808,591
Spinning ring support, M. H. Maloney	808,396
Spittoon, J. L. Boisvert	808,429
Splice bar and guard rail, combined, W. T. Young	808,425
Sprayer, double acting, F. S. Carothers	808,194
Spring stretching device, R. P. Raschick	808,113
Stacker, hay, J. E. Will	808,266
Stage and scaffold attachment, adjustable safety swinging, F. Lehmann	808,161
Stamping or tablet making machine, G. Schwarzbeck	808,406
Steam engine and air compressor, combined, C. Fero, Sr.	808,526
Steam generator, W. L. Jones	808,286
Steam generator disincrustant, A. Jacob	808,240
Steam purifier, D. L. McCorkindale	808,564
Steam shovel, O. Hetlesaeter	808,452
Steam trap, W. Bletso	808,506
Stencil cutting machine, T. W. Remmers	808,308
Stereotype plate casting apparatus, Caps & Vining	808,070
Stirrup, F. H. Audley	808,333
Stock, drinking font for live, Lewis & Smith	808,393
Stocking, J. Kayser	808,204
Storage receptacles, door construction for, A. D. McMahan	808,108
Store counters or the like, attachment for, P. S. Grindle	808,540
Stove, F. Hammond	808,607
Strainer and cut-off, drain pipe, W. E. Piper	808,477
Street cleaner, H. Duke	808,352

Clean House With Air



Over 55 Companies operating Thurman Patents in America, and as many more in **Canada, England,** and **Europe.**

FREE CATALOGUE

General Compressed Air House Cleaning Co.
ST. LOUIS, U. S. A.

Manufacturers of the Celebrated Thurman direct-connected Gasolene Driven Air Compressors for Mines, Pneumatic Tools, Etc.

Save Time and Money

Progressive business men use
BATES
Hand Numbering Machine

It prints numbers consecutively, duplicates or repeats—changed instantly by turning pointer. To learn how it will save for you, send for Booklet 48 now.

BATES MFG. CO., 31 Union Sq., New York
CHICAGO—304 Wabash Avenue
Factory, Orange, N. J.

Whitewash Your Factory at Lowest Cost

With a **Progress Universal Spraying Machine.** One man can apply whitewash, calcimine or cold water paint to 1,000 square feet of factory wall in ten hours, and do better work than with a brush. It is also adapted for spreading disinfectants, destroying insect pests and diseases on trees, vegetables and other plants, extinguishing fires, etc. This machine costs only **$16.50** and lasts a lifetime. It pays for itself the first year. Write for detailed description.

Dayton Supply Co., Dayton, Ohio.

THE IDEAL LAWN MOWER GRINDER



This machine will grind a lawn mower perfectly in 15 minutes, and is destined to revolutionize the whole business. Greatly improved over old models, and is now perfection. Energetic men and boys make $10 per day using it. Nothing like it on the market.

For prices, etc., address the manufacturers.

THE ROOT BROS. CO., Plymouth, Ohio

MOTOR CYCLES

From $40 up

Send for List No. 102 Containing 70 Machines

HARRY R. GEER CO., 1015 Pine St., St. Louis, Mo.

SUBSTITUTES FOR COAL

Are described from the technical standpoint in the following Scientific American Supplements.

Each Supplement named costs 10 cents by mail:

COMMERCIAL USES OF PEAT. SCIENTIFIC AMERICAN SUPPLEMENT **1324.** The article enumerates the principal peat bogs and states their financial possibilities.

GERMAN BRIQUETTING MACHINERY IN AMERICA. SCIENTIFIC AMERICAN SUPPLEMENT **1411.** A valuable economic report.

A NEW ELECTRICAL PROCESS FOR THE MANUFACTURE OF PEAT FUEL. SCIENTIFIC AMERICAN SUPPLEMENT **1492.** The paper fully describes the Bessey process.

LIGNITE, PEAT, AND COAL DUST FUEL. SCIENTIFIC AMERICAN SUPPLEMENT **1426.** A careful consideration of German methods.

MOOR CULTIVATION AND PEAT INDUSTRY IN GERMANY. SCIENTIFIC AMERICAN SUPPLEMENT **1481.** An excellent critical review.

DOMESTIC COKE AND BRIQUETTES FROM RETORT COKE OVENS. By R. M. Atwater, SCIENTIFIC AMERICAN SUPPLEMENT **1211.** A valuable monograph by a n expert.

THE WHITE MINERAL PRESS FOR BRIQUETTING. SCIENTIFIC AMERICAN SUPPLEMENT **1224.** An article describing and illustrating an American briquetting machine.

Price 10 cents each, by mail.

Order through your Newsdealer or from

MUNN & COMPANY
361 Broadway NEW YORK

GORDON makes Gordon SUSPENDERS

TRADE MARK

I want you to examine the *side web* back in my **GORDON** Suspenders. It moves on your back *without friction.* My **GORDON** Suspenders will not *twist* out of shape, do not *bind* your shoulders. Neither do **GORDON** Suspenders *stretch* out of shape. MY **GORDON** Suspenders are the one dollar kind, but you buy them for

50 Cents.

When writing me for booklet or suspenders, please mention Dept. S. A. That means you read this magazine.

I make Gordon Suspenders in four lengths, 33, 35, 37, 40 in.

Your dealer should supply you. If he hasn't them, he can get them. I also send them to you **on approval.** Any man writing me on his business stationery can get the **GORDON SUSPENDERS.** Examine them, test them, then send me

50 Cents

in my coin card, which you will get, or return suspenders, I make this offer so that you can be supplied if your dealer hasn't them.

Try him first.

GORDON MFG. CO. 50c. New Rochelle, N. Y.

MY BOOK FREE

"How to Remember" Stop Forgetting

Free to Readers of this Publication

THE KEY TO SUCCESS

You are no greater intellectually than your memory. My course simple, inexpensive. Increases' business capacity, social standing, gives an alert, ready memory for names, faces and business details. Develops will, conversation, speaking, etc. My booklet, "How to Remember," sent free.

DICKSON SCHOOL OF MEMORY, 700 Kimball Hall, Chicago

INVESTORS' BOOK FREE

Those who have $100 or more in a bank can get our **Cloth Bound** book—"Money Making"—absolutely **Free.** This volume is artistically printed—beautifully illustrated. Contains no advertising. Tells how to invest with safety and profit. Write for it to-day—mentioning bank.

BARNARD & CLARK, Suite 11, 25 Broad St., New York City.

A Quick Trial Balance

"Our bookkeepers started their different trial balances Saturday noon and by half past five all balances were O.K'd and filed away and our bookkeepers went home with lighter hearts than they have ever experienced before at trial balance time. These balances generally take from three to five days and the 'Standard' does it for them in half a day."

So writes one of the biggest Wagon Makers in the world.

$185.00

THAT monthly nightmare, the Trial Balance can be made **easy**—there's no need of its dragging along for a week, delaying business, wasting time. Ninety-nine times out of 100 the cause is some little mistake in addition which the

STANDARD Adding Machine

would have prevented, because it is **always accurate the first time.**

The Standard has less than half the parts—is less than half the weight—less than one-quarter the keys, and sells at $185.00, less than half the price formerly asked for Adding Machines that print their work.

Our Simple Keyboard explains it all—only 19 keys—just ten figure keys—1 2-3-4-5-6-7-8-9-0—as compared with a confusing, mistake-breeding bank of keys on the old kinds.

The Standard Must Sell Itself

Now just try the machine—that's all we ask, and there s not the slightest obligation to buy. If the machine will pay for itself and earn steady profits for you afterward, you'll take it, won't you? Well, just put the machine in operation in your own office and figure it out on its performance. **Then** say "I'll buy" or "Don't want it" — whichever **economy** dictates. This coupon for your convenience.

The Standard Adding Machine Co.
406 Spring Ave., St. Louis, Mo.

This coupon for the signature of employers or employees

☐—With the distinct understanding that I am creating no obligation of any sort, I will test a Standard Adding Machine in actual operation as applied to this business.

☐—Please send me your book, "The Standard Way."
406

Name

Business

Address State

THE POSTAL TYPEWRITER CO.'S
FACTORY AT NORWALK, CONN.
is Equipped to do Experimental Work, Tool Making and Manufacturing. Inventions Developed. Very Best Work Guaranteed. Correspondence Solicited.



Turn It Upside Down

and it won't spill. The only non-liquid storage battery on the market and the only one of its kind in the world. Impossibility for plates to bend or short-circuit, as electrolyte is of solid consistency. Can be recharged like the wet storage battery as often as desired. Suitable for every gas and gasoline ignition. Shipped fully charged to any part of the world. Write for descriptive pamphlet and trade prices.

THE ROYAL BATTERY CO.
143 Chambers St., New York City

PORTABLE CONCRETE
Block Machine

Ambitious young men can start fine business, immediately profitable, easily expanded.
Blocks cost 6 cents to make, sell for 18 cents. One man can make 200 blocks per day. Whole outfit costs $125.00.
Sand, water and Portland cement only materials required.
Sent on trial.

THE PETTYJOHN CO.
615 N. 6th St., Terre Haute, Ind.

Our COMBINATION BLUE PRINT FILE AND DRAUGHTING TABLE

The top can be adjusted to various heights and tilted to any angle. We carry a full line of all styles of Draughting Tables, Blue Print Frames, Electrotype Cabinets, etc. Send for Catalogue

FRITZ & GOELDEL MFG. CO.
97 Alabama St., Grand Rapids, Mich.

THE STERLING AIR HEATING
RADIATOR

Attached to any **Stove, Range** or **Furnace. Doubles Heating Capacity or Saves Half Fuel Expense.** Insures continuous circulation, warm floors, comfort and health. Write for full description and terms. Agents wanted. Sells easily, always satisfies.

STERLING AIR RADIATOR CO.
No. 58 Wabash Ave., Chicago

PRESS YOUR TROUSERS WHILE YOU SLEEP

by using the
Perfect Pants Presser

Puts in the "Crease," takes out the "Bag." Keeps trousers in perfect order by placing them in press on retiring; by morning they will have that well-pressed, fresh appearance, with a regular "tailor's" crease, no matter how wet, baggy or out of shape. The cost is saved many times a year, and provides a continuously neat appearance. This is the day of the good dresser. Send for a Perfect Pants Presser,

use it 60 days, money returned if unsatisfactory.
Circular and full information on request.
Plain Wood, Mahogany Stain, Japanned Trim...$3.50
Hard Wood Veneered Boards, Natural Finish (Oxidized Copper Trim).....$5.00
PERFECT PANTS PRESSER CO., 697 A Rookery, Chicago, ILL.
For sale by: New York, Lewis & Conger; San Francisco, Palace Hardware Co. Boston, Wm. H. Richardson & Co.; Pittsburg, J. B. Kaercher; Joseph Horne & Co.; Chicago, Marshall Field & Co.; Denver, Gano Clothing Co.; Birmingham, J. Bloch & Sons.

Principles of Home Decoration

BY

JOY WHEELER DOW

A Series of Monthly Papers in

American Homes and Gardens

MR. DOW is contributing to AMERICAN HOMES AND GARDENS a series of monthly papers on interior household decoration, under the comprehensive title of "Principles of Home Decoration.'

The papers are richly illustrated and are written in the keenly critical spirit for which Mr. Dow is well known. They admirably summarize the whole subject of household decoration, and abound with admirable hints and suggestions. The photographs published with the articles are supposed to emphasize some principle of decoration, showing what is admirable and what is to be carefully avoided.

The July issue was a general introduction of the subject, together with examples of one or two typical English living rooms. The August issue treats of the subject of Halls. Subjects to follow will relate to the Dining Room, the Drawing Room, etc.

Every one who is interested in home decoration will be interested in and receive valuable suggestions from this series by Mr. Dow.

American Homes and Gardens
PUBLISHED BY
MUNN & COMPANY
361 Broadway, New York
25 cents per Copy, $3 per Year

Stump puller, J. J. Milne	808,247
Superheater, independently fired, J. E. Bell	808,228
Swinging gate, T. B. Walston	808,324
Switch clips, making, W. J. Rickey	808,258
Tachometer, C. D. Haskins	808,237
Tank heater and feed cooker, W. S. Griffiths	808,360
Tap, beer, M. J. Chaplin	808,341
Tap for beer barrels, M. J. Chaplin	808,195
Telegraph transmitter, Hayes & Gill	808,366
Telephone attachment, P. Kammerer	808,454
Telephone service, recording apparatus for measured, J. A. Kenny	808,383
Telephony, I. Kitsee	808,386
Telephony, A. G. Davis	808,438, 808,600
Textile machinery, faller for stop motion mechanisms for, J. B. Whitney,	808,419, 808,420, 808,617
Thermo electric battery, A. Heil	808,086
Thread holding device, Rowley & Rubira	808,114
Threshing machine, Whiting & Johnson	808,497
Threshing machine feeder, C. S. Sherwood	808,173
Tire cover, J. C. Dufour	808,074
Tire, cushioned, C. W. Adsit	808,426
Tires, clamping device for pneumatic, H. K. Raymond et al.	808,307
Toilet and manicure case, J. J. M. Dawson	808,143
Tongue support, J. F. Cell	808,071
Tool handle, G. E. Wood	808,330
Tool rack, J. W. Danhour	808,142
Toothpicks and similar articles, holder for, C. F. Hamel	808,606
Toy, J. C. Krejci	808,458
Trace carrier, J. B. Miller	808,297
Traction engine, F. N. Briney	808,230
Transom lifter, R. W. King	808,456
Trap. See Insect trap.	
Traveling case and sales table, combination, N. M. Barr	808,427
Traveling case lock, S. W. Bonsall	808,189
Trolley finder, J. Wilhelm	808,589
Trolley harp for electric railways, J. Miller, Jr.	808,163
Trolley head, electric, Cherry & Clive	808,139
Trolley pole, Osburn & Coad	808,109
Trolley pole controllers, valve governor for, M. O. Dolson	808,198
Trolley wheel, electric, J. Miller, Jr.	808,162
Truck, elevating, T. Podmore	808,212
Truck for motor propulsion and the like, car, W. S. Adams	808,062
Truck, tender, H. E. Drew	808,440
Trunk, I. Mendel	808,295
Tubing making apparatus, N. Foster	808,356
Turbine, elastic fluid, O. Kolb	808,094
Turbine, elastic fluid, Wood & Burlingham	808,134
Turbine, elastic fluid, M. A. Green	808,152
Turbine, elastic fluid, J. W. Cloud	808,343
Twisting and winding mechanism, C. H. McCall	808,106
Twisting machine, P. Hardman	808,084
Typewriter ribbons, shifting mechanism for, Jones & Taylor	808,158
Typewriting machine, A. T. Brown	808,598
Umbrella rib, M. G. McGuire	808,249
Valve, automatic free discharge, A. Lee	808,461
Valve, controlling, Voorhees & Trah	808,494
Valve, emergency brake, G. H. Hill	808.238
Valve for gas engines, rotary, F. M. Seeley	808,579
Valve, gate, H. Millholland	808,561
Valve gear, steam engine, E. Bauthiere	808,334
Vapor burner, H. F. Smith	808,581
Vehicle brake, D. Grubb	808,450
Vehicle running gear, S. N. Burdsall	808,068
Vehicle, wheeled, A. Stechbarth	808,409
Velocipede, F. M. Thompson	808,616
Vessels, constructing, E. Molloy	808,467
Wagon, lumber, D. W. Strickland	808,261
Wagon rack, hay, J. Vogel	808,265
Wall finishing process, H. H. Hahn	808,236
Washing machine, D. Stuck	808,175
Washing machine, T. E. Jones	808,380
Washing machine, Dyke & Alderman	808,521
Washing machine, C. E. Goulding	808,537
Waste trap, A. S. Newton	808,399
Watch barrel, J. Thalhofer	808,176
Water gate, L. P. Pekrul	808,254
Water heater, R. Beaumont	808,335
Water heater, electric, J. P. Erie	808,525
Water meter, electric, R. H. Milton	808,562
Water purifying and filtering apparatus, L. Dion	808,350
Water supply for urban and other buildings, system of, W. P. Groom	808,083
Water tube boiler, J. P. Davies	808,437
Weather strip, W. H. Taylor	808,316
Weight registering mechanism, W. A. Kennedy	808,091
Wheel. See Cable traction wheel.	
Wheel rim, E. Schmitz	808,405
Whist apparatus, duplicate, C. E. Buzby	808,432
Winding machine, C. Moriggl	808,468
Winding machine stop motion, F. W. Sumner	808,585
Winding mechanism tension device, J. B. Whitney	808,415
Window glass fastener, J. H. Ibison	808,544
Window screen, Irwin & Duffy	808,090
Window screen, R. Parsons	808,400
Window screen, adjustable, B. C. Rockwell	808,577
Window ventilator, J. L. Meeks	808,466
Windows, shutters, and the like, mechanism for operating casement, R. C. Spencer, Jr.	808,486
Wire loom shuttle, H. A. Bond	808,430
Wood boring implement, J. Lund	808,245
Wrench, B. F. Nedrow	808,250
Wrench, J. J. Fetzer	808,603
Yoke center, neck, F. J. Drum	808,276

DESIGNS.

Automobile tonneau, R. A. Leslie	37,763
Badge, O. A. Quayle	37,757
Electric light shade, M. E. Bates	37,762
Game apparatus dial, J. Forsheim	37,761
Hammock valance, I. E. Palmer	37,765
Ice cream cornucopia, K. Yakushyi	37,759
Medicinal tablet and pelloid box, F. H. Putnam	37,760
Mirrors, brushes, and similar articles, back for, G. H. Berry	37,758
Ring, O. A. Quayle	37,755, 37,756
Type or plate, printing, J. Morley	37,764

TRADE MARKS.

Absinthe, Charles Jacquin et Cie	48,322
Accordions, Lyon & Healy	48,419, 48,420
Alcohol, C. H. Graves & Sons	48,327
Baking powder, Consumers Supply Co	48,341
Beverage, non-alcoholic tonic, Wiseola Co	48,358
Bitters, Lange, Schenck & Co	48,313
Bitters, Theobald & Son Co	48,318, 48,320
Bitters, nerve, Aschenbach & Miller	48,411
Bluing, A. Pfromm	48,422
Boiler compounds, Arrow Boiler Compound Co.	48,410
Boots and shoes, leather, Regal Shoe Co	48,351
Boots and shoes, leather, Walker & Whitman	48,361
Boots and shoes, leather, Utz & Dunn	48,434
Brandy, C. H. Graves & Sons	48,328
Candy, Reymer & Brothers	48,352
Candy, American Confectionery Co	48,364
Cards, playing, United States Playing Card Co.	48,357, 48,386
Cartons, Hinde & Dauch Paper Co	48,402
Cartridges, Selby Smelting and Lead Co	48,379
Chemical preparations, certain named, Preservaline Mfg. Co.	48,430
Cigarettes, H. P. Strause	48,383
Cigars, Fehsenfeld Cigar Co	48,427
Cigars, Juan F. Portuondo Cigar Mfg. Co	48,428
Cocktails, P. J. Boulin Liquor Co	48,332
Cordial, Kamp Distilling Co	48,375
Cordials, S. Hochstadter	48,309, 48,345
Creme de menthe, Charles Jacquin et Cie	48,321
Disinfectants and antiseptics, Bellevue Chemical Co.	48,436
Dyestuff, Cassella Color Co	48,412
Electric batteries, Leclanche Battery Co	48,384
Evaporating and distilling apparatus, Wheeler Condenser & Engineering Co	48,409
Firearms, Webley & Scott Revolver & Arms Co.	48,404, 48,405
Files and rasps, G. & H. Barnett Co	48,371
Fuses, electric safety, D. & W. Fuse Co	48,439
Fuses, inclosed electric, Johns-Pratt Co	48,403
Gin, Henry Kroger & Co	48,308
Gin, H. Kahn	48,330
Glass, cut and engraved, T. G. Hawkes & Co.	48,400
Gloves, J. Adler & Co	48,389

1891 1906 **Orient** Friction-Drive **Buckboard**



A Remarkable Little Car for $400

Maximum power ratio 40 to 1.
More than twice that of any automobile.
Has no equal for hill climbing or through sand and mud.
Numerous speeds forward and *reverse*.
Engine mounted on frame above elliptic springs.
No more noise or vibration than a Touring Car.
Ten-inch clearance from ground.
Fan mounted in front of engine.
Oiling done from seat by hand pump.
Conventional shape of hood and back.
Rear construction except motor enclosed and dustproof.
Unequaled economy – 35 miles to one gallon of gasolene and one-third pint of oil.
Active agents desired for unassigned territory.
Write for Catalog and Proposition.

WALTHAM MFG. COMPANY
General Offices and Factory, **Waltham, Mass., U.S.A.**
Members A. L. A. M.

Reliable Marine Motors



Reliability is absolutely the first consideration in a Marine Motor.
Fay & Bowen Motors have an unequaled record for reliability in numberless endurance and heavy weather tests.
Simplicity, durability, power and flexibility
No crank required for starting.
Send for free catalogue of Reliable Motors and perfectly built boats.

Fay & Bowen Engine Company
80 Lake Street **Geneva, N. Y., U. S. A.**

Let Us Send You One

We want you to test the merits of the **Dean Boiler Tube Cleaner** in your boilers, under your personal supervision. We are confident that if you do so you will reach the same decision that the other 6,000 users

of the Dean Cleaner have reached: that it is positively the best device in the market for the removal of scale from boiler tubes. Write us about it.

THE WM. B. PIERCE CO.
319 Washington Street, Buffalo, N. Y.

WIRELESS TELEGRAPHY.—ITS PROGRESS and Present Condition are well discussed in SCIENTIFIC AMERICAN SUPPLEMENTS **1425, 1426, 1427, 1386, 1388, 1389, 1383, 1381, 1327, 1328, 1329, 1431.** Price 10 cents each, by mail. Munn & Co., 361 Broadway, New York City, and all newsdealers.

TAKE YOUR CHOICE—

THE OLD WAY

But the easy way to clean your auto, carriage, wagon or sleigh is with the
ARDREY VEHICLE WASHER
Patented August 15, 1905
No cold hands. No soiled clothing. Cleans in half the time. Saves three-quarters the work. Made of solid brass. Fits any ordinary hose. Sponge always clean. Impossible to scratch or injure finest finish. **Prepaid $3.** Send to-day. Booklet FREE.
ARDREY VEHICLE WASHER COMPANY
131C Main Street, Rochester, N. Y.

THE ARDREY WAY

Civil Engineering and Surveyors' Instruments

DRAWING INSTRUMENTS, MATERIALS AND SUPPLIES
We are the largest house in the world. Try us on BLUE PRINT PAPER, TRACING CLOTH, DRAWING INKS, or SURVEYING and ENGINEERING INSTRUMENTS
A. S. ALOE CO., 515 Olive Street, - - - St. Louis, Mo.
Write for Catalog. "Sent Free." Correspondence Solicited.

START THE NEW YEAR

BY SUBSCRIBING FOR THE

Scientific American
AND
Scientific American Supplement

Combined Rates $7.00 a Year

MUNN & CO., 361 Broadway, New York

"A Kalamazoo Direct to You"



You save from 20% to 40% by buying a Kalamazoo Stove or Range direct from the factory at **lowest factory prices.** Moreover, you get a stove or range not excelled by any in the world. We guarantee quality under a $20,000 bank bond.

We Ship On

360 DAYS APPROVAL

and We Pay the Freight.

If you do not find the Kalamazoo *exactly* as represented, the trial does not cost you a cent. It will pay you to investigate.

Send Postal for Catalog No. 346.

All Kalamazoos are shipped promptly, blacked, polished and ready for use.

Kalamazoo Stove Co., Mfrs., Kalamazoo, Mich.

All our cooktops and ranges are fitted with patent oven thermometer which makes baking easy.

Oven Thermometer

SAVE FIRE LOSS

PROTECT YOUR HOMES AND PROPERTY.

Badger's Fire Extinguisher will put out any kind of a fire at the start.

So simple a child can use it.

Write for information.

BADGER FIRE EXTINGUISHER CO.

39 Portland St., Boston, Mass.

RADIUM AND THE RADIO-ACTIVE Substances. No better or clearer scientific account has been published than that contained in SCIENTIFIC AMERICAN SUPPLEMENT **1429.** The paper presents all that is at present known about radium and the radio-active substances. Price 10 cents, by mail. Munn & Co., 361 Broadway, New York City and all newsdealers.

A CLEAN KITCHEN

and a great saving in wall paper and paint is effected by the use of the **Victor Range Canopy.** Can be easily attached to any range in 20 minutes Takes the smoke, steam, grease, smell and dampness from the kitchen up the chimney. Made of polished iron, nickel trim. Price, for 4 or 6 lid range, $7.50. **Good agents wanted.**

The Phœnix Furnace Co., 214 Wood St., Pittsburg, Pa.

MILLS FOR ALL MATERIALS.

OUR BUSINESS IS TO MAKE MACHINERY FOR GRINDING GRAIN, CRUSHING ROCKS AND PULVERIZING ALL HARD SUBSTANCES. WE HANDLE ALL KINDS OF MATERIALS FROM COTTON-SEED TO ROOTS AND HERBS, BY AN UNEXCELLED PROCESS. IF YOU WANT ANY KIND OF A MILL OR GRINDING MACHINE, COME TO US AND YOU WILL GET THE BEST AND STILL SAVE MONEY.

DEAL WITH US ONCE AND YOU WONT CHANGE.

ESTIMATES FREELY FURNISHED.

SPROUT, WALDRON & CO.

(SEND FOR CATALOG No 4.) MUNCY, PA.

NO MORE IRONING TROUSERS

Newly patented Trouser Presser, applied when they are hung up, restores creases perfectly. Two spring steel blades 26 in. long, are curved to exert a powerful clamping pressure.

Price 35 cents, postage prepaid to any address.

G. E. PROCTOR COMPANY

140 Nassau St. New York

ELECTRICAL MOTORS — THEIR Construction at Home. SCIENTIFIC AMERICAN SUPPLEMENTS **759, 761, 767, 641.** Price 10 cents each, by mail. Munn & Company, 361 Broadway, New York City, and all newsdealers.

LE PAGE'S MUCILAGE

No gumming to clog neck of bottle—No sediment—will not spoil nor discolor the finest papers. Full 2 oz. bottle retails at 5c., or sent by mail for 10c.; also half-pints, pints and quarts.

LePage's Photo Paste, 2oz. size retails 5c.; by mail, 10c.

LE PAGE'S GLUE STRONGEST IN THE WORLD

1 oz. bottle or tube, 10c.; by mail, 12c.

RUSSIA CEMENT CO., 139 Essex Ave., Gloucester, Mass.

60 YEARS' EXPERIENCE

PATENTS

TRADE MARKS
DESIGNS
COPYRIGHTS &c.

Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. **HANDBOOK** on Patents sent free. Oldest agency for securing patents.

Patents taken through Munn & Co. receive *special notice*, without charge, in the

Scientific American.

A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, $3 a year; four months, $1. Sold by all newsdealers.

MUNN & Co. 361 Broadway, **New York**

Branch Office, 625 F St., Washington, D. C.

Grease cups, Lunkenheimer Co.	48,385
Guitars, Lyon & Healy	48,421
Hair tonics and hair dyes, F. G. Telfer	48,355
Hats and caps, J. Samuels & Bro.	48,377
Heat storing devices, Thermalite Co.	48,431
Knives, pocket and pen, E. Weck	48,408
Laces, shoe, H. L. Hiller	48,344
Lamp glasses and globes, Macbeth-Evans Glass Co.	48,347, 48,392
Liniment, C. Stanley	48,425
Lubricants, antiseptic, Russell & Lawrie	48,443
Machine blades or knives, Lorng Coes & Co.	48,442
Maraschino, Charles Jacquin et Cie	48,340
Meat extracts, Valentine's Meat Juice Co.	48,360
Meat juice, preparations of, Valentine's Meat Juice Co.	48,359
Medical compound, S. H. E. Hayden	48,441
Medicinal preparations, Leslie E. Keeley Co.	48,429
Medicines, proprietary, L. M. Kazunas	48,418
Medicines, tonic, S. B. Hartman	48,440
Metals, antifriction, E. S. Shimer	48,380
Milk separator, Aktiebolaget Salenius Werkstader	48,338
Nail polishing composition, Dr. J. Parker Pray Co.	48,343
Needles, sewing, C. F. Boker	48,365
Newspaper, trade, David Williams Co.	48,369
Newspaper, weekly, W. C. & F. P. Church	48,407
Oil, olive, F. R. Sari	48,378
Oils for internal and external use, Kickapoo Indian Medicine Co.	48,445
Oiled clothing, A. J. Tower Co.	48,336, 48,337
Orange curacao, Charles Jacquin et Cie	48,339
Organs, Hamilton Organ Co.	48,416
Organs, cabinet, W. W. Kimball Co.	48,435
Packing, Garlock Packing Co.	48,356
Paint and varnish removers, Gould & Cutler Corporation	48,415
Paper and envelops, writing, G. B. Hurd & Co.	48,391
Photographic paper and films, Societe Anonyme "Luna"	48,381
Pulp, International Pulp Co.	48,346
Pulp canal cleansers, R. B. Donaldson	48,413
Razors, Challenge Cutlery Corp.	48,366
Remedies for blood diseases of the mucous surfaces, Rio Chemical Co.	48,424
Remedy for certain named diseases, Finlay, Dicks & Co.	48,414
Remedy for diseases of the blood, A. B. Scutt	48,399
Remedy for diseases of the blood and skin, Dr. Peter Fahrney & Sons Co.	48,444
Rock and rye, Charles Jacquin et Cie	48,323
Saws, E. C. Atkins & Co.	48,370
Sewing machines, Abraham & Straus	48,363
Sewing machines and attachments, Abraham & Straus	48,362
Skirts, G. Plonsky & Bro.	48,372
Soda, washing, Alden Speare's Sons Co.	48,426
Steel, Crucible Steel Company of America,	48,304 to 48,307
Steel, Singer, Nimick & Co.	48,334
Steel, Park Steel Co.	48,349, 48,350
Steel, Crucible Steel Company of America	48,368
Tamales, enchiladas, frijoles, and chili con carne, Spanish-American Food Co.	48,382
Tapioca, prepared, Whitman Grocery Co.	48,387
Tinters for mortar or plaster compounds, Toch Brothers	48,433
Tires, bandages, repair sheets, plasters, and patches, Continental Caoutchouc Co.	48,342
Tonics, Rio Chemical Co.	48,423
Umbrellas, W. H. Rich & Son	48,353
Valves, J. A. Murray	48,395
Valves and cocks, A. B. Jenkins	48,373
Varnish stains, Glidden Varnish Co.	48,401
Veterinary remedy, D. Binkley	48,437
Water and stain proofing liquid, Toch Bros.	48,432
Waters, aerated, A. C. Schuyler	48,354
Whisky, A. Breslauer Co.	48,301
Whisky, Colburn, Birks & Co.	48,303
Whisky, Jesse Moore Hunt Co.	48,310
Whisky, Kirsch Bros. & Co.	48,311
Whisky, Lang, Schenck & Co.	48,312
Whisky, William H. Lee & Co.	48,314, 48,315
Whisky, L. & A. Scharff	48,316, 48,317
Whisky, B. Fischer	48,324
Whisky, J. & A. Freiberg	48,325
Whisky, Goodman Bros.	48,326
Whisky, H. Kahn	48,329
Whisky, Kaufmann Bros. & Co.	48,331
Whisky, Shea-Bocqueraz Co.	48,333
Whisky, Taylor & Williams	48,335
Whisky, National Distilling Co.	48,348
Whisky, Colburn Birks & Co.	48,367
Whisky, Kamp Distilling Co.	48,374
Whisky, Mallard Distilling Co.	48,376
Whisky, A. Breslauer Co.	48,388
Whisky, J. Harbinson	48,390
Whisky, Montana Liquor Co.	48,393
Whisky, C. Mundy	48,394
Whisky, T. Pepper's Sons	48,396
Whisky, J. S. Perrine & Son	48,397
Whisky, J. Rauber & Co.	48,398
Whisky, Wm. H. Holmes Co.	48,406
Whisky, Jesse Moore Hunt Co.	48,417
Whisky, J. M. Davis	48,438
Wire cloth, netting, and fencing, woven, Clinton Wire Cloth Co.	48,302

LABELS

"Art," for cigars, J. F. Wilcox & Co.	12,572
"B. & O. Central," for cigars, J. Markovitz.	12,570
"Ben's Brillant Beer," for beer, N. Benjamin Son	12,577
"Colombo Bitters," for medicine, Dr. C. De Felice	12,574
"Fernet Ricca," for bitters, Chas. Jacquin et Cie.	12,575
"Forjada," for tea, C. F. Posbergh & Co.	12,578
"Germ Flake," for pancake flour, Barrows Milling Co.	12,579
"Hot Stuff," for a tonic and relish, S. W. Noggle Wholesale & Mfg. Co.	12,576
"Hubtip," for lacings for boots and shoes, F. W. Whitcher	12,585
"Masetto," for cigars, Magidson Bros.	12,573
"Paris Antiseptic Dental Plaster," for antiseptic plaster, W. Church	12,583
"Polio," for furniture polish, W. W. Wates	12,586
"Posner Bros. Excilaiter Dandruff Cure," for hair tonic, Posner Brothers.	12,581
"R. Steinecke Co.," for cigars, R. Steinecke Co.	12,571
"Select Pack California Moorpark Apricots," for dried fruit, Castle Bros.	12,580
"Snow-Ball Freezer," for ice cream freezers, Richmond Cedar Works.	12,584
"Swamp Chill and Fever Cure," for medicine, Morris Morton Drug Co.	12,582
"True to Nature," for linoleum, P. O. Judson & Co.	12,587

PRINTS.

"Bairam," for cigarettes, S. Anargyros	1,525
"Jayne's Sanative Pills are the best at all times," for pills, Dr. D. Jayne & Son	1,521
"Mecca," for cigarettes, S. Anargyros	1,526
"Murad," for cigarettes, S. Anargyros	1,524
"Star Bathtub Enamel," for an enamel, Gerstendorfer Bros.	1,528
"The Edelweiss Girl," for beer, P. Schoenhofen Brewing Co.	1,523
"The Real Pure Food Show," for flour, Washburn-Crosby Co.	1,522
"Turkish Trophies," for cigarettes, S. Anargyros	1,527

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list. For terms and further particulars address Munn & Co., 361 Broadway, New York.

TELEPHONE ENGINEERS

desiring to fit themselves for better paying positions should send for 200-page handbook (**FREE**) describing our **Telephony** course, and over 60 others, including **Electrical, Mechanical, Steam** and **Civil Engineering, Architecture, Mechanical Drawing, Structural Drafting, Textiles,** etc.

American School of Correspondence, Chicago, Ill.

LET US BE YOUR FACTORY

WRITE FOR ESTIMATE ON ANY ARTICLE YOU WANT MANUFACTURED

STAMPINGS, MODELS, EXPER. WORK

WRITE FOR FREE BOOKLET

THE GLOBE MACHINE & STAMPING CO.

970 Hamilton St., Cleveland, O.

Men and boys wanted to learn PLUMBING TRADE, pays $5 a day after completing course of practical instruction at home or in our schools. Graduates admitted to Union and Master Plumbers' Association. Positions secured. COYNE BROS. CO. PLUMBING SCHOOLS, 239 Tenth Avenue, New York. Chicago, Ills., Cincinnati, O. Free catalog.

ICE MACHINES. **Corliss Engines,** Brewers' and Bottlers Machinery. THE VILTER MFG. CO. 899 Clinton St., Milwaukee, Wis.

MODELS & EXPERIMENTAL WORK. Inventions developed. Special Machinery. E. V. BAILLARD. 24 Frankfort Street. New York.

RUBBER Expert Manufacturers Fine Jobbing Work

PARKER, STEARNS & SUTTON, 228-229 South St., New York

EXPERIMENTAL WORK Scientifically and accurately executed. Models and small machinery perfected. STENDICKE & VOLKMER, 61 Fulton Street. Telephone 5655 John.

MODELS CHICAGO MODEL WORKS 179 E. MADISON ST CHICAGO, ILL. ESTABLISHED 1867 WRITE FOR CATALOGUE OF MODEL SUPPLIES

Models & Exper. Work, Gears, Dies, Tools, Small Machy., Scient. Insts. M. P. Schell, 506 Mission St., San Francisco.

MODELS & GEARS INVENTIONS PERFECTED UNION MODEL WORKS 193 So. CLARK St. CHICAGO.

MODEL AND EXPERIMENTAL WORK.

Electrical and Mechanical Instruments. Small Mach'y

EDWARD KLEINSCHMIDT. 82 W. Broadway, New York



Foot and Power Lathes

Send for catalogue and prices

Carroll-Jamieson Machine Tool Co., Batavia, Ohio

PUMP WANTED. A second-hand, centrifugal pump with 20-inch suction, capable of handling 12,000 gallons per minute, at 5 ft. lift, for pumping water from a lake to an adjacent cranberry bog. Address, stating price, make and condition of pump, W. E. DAMON, Bryantville, Mass.

TELESCOPES SEND FOR CATALOGUE W. & D. MOGEY. BAYONNE CITY, N.J.

WANTED.—Master Machinist, $6.00 per diem, Naval Station, New Orleans, La. A competitive examination will be held for the above position at the Navy Yard, Brooklyn, N. Y., January 10, 1906. For further information apply to Commandant, Navy Yard, Brooklyn, N. Y.

WHY PAY? High city prices, if you can get your machine workdone better and cheaper just five minutes from N. Y.? Successful experimental work; special machinery designed and built on contract. Get our estimate. J. R. ENGELMAN MFG. CO., 74 Hudson Street, Jersey City, N. J., near Pennsylvania Depot.

Removed to **132 Milk Street.**

170 PAGE ELECTRIC BOOK FREE

Write for it. We will also send you our special plan by which you can secure any article in our big catalogue No. 26 absolutely FREE.

Julius Andrae & Sons Co., 104 W. Water St., Milwaukee, Wis.

AUTO STORAGE BATTERIES ALL KINDS

THE WILLARD STORAGE BATTERY CO. CLEVELAND, O.

GLOBE INCUBATORS.

Hatch chickens No experience necessary Our large new Illustrated Catalogue of Incubators and Brooders and Poultry Information mailed free. Write to-day. Address

C. C. SHOEMAKER

Box 651 Freeport, Ills.

Profitable Poultry Raising

is made easy if you use the new 1906 Pattern

Standard CYPHERS Incubator

guaranteed to hatch more and healthier chicks than any other. 90 *Days Trial.* Poultry Guide (228 pages) Free if you mention this journal and give address of two neighbors interested in poultry. Write nearest office.

CYPHERS INCUBATOR CO., Buffalo, N. Y.

Boston, Chicago, New York, Kansas City or San Francisco.

Electrical Engineering

and Experimental Work of Every Description

We have every facility for producing first-class work promptly. Our factory is equipped with modern machinery throughout.

C. F. SPLITDORF

Engineering Dept. 17-27 Vandewater St., N. Y. City

THE ANNUAL AUTOMOBILE NUMBER OF THE SCIENTIFIC AMERICAN will be published on January 13, 1906. It will contain 40 pages. It will have a colored cover. It will cost only Ten Cents, and will be found on every news stand.

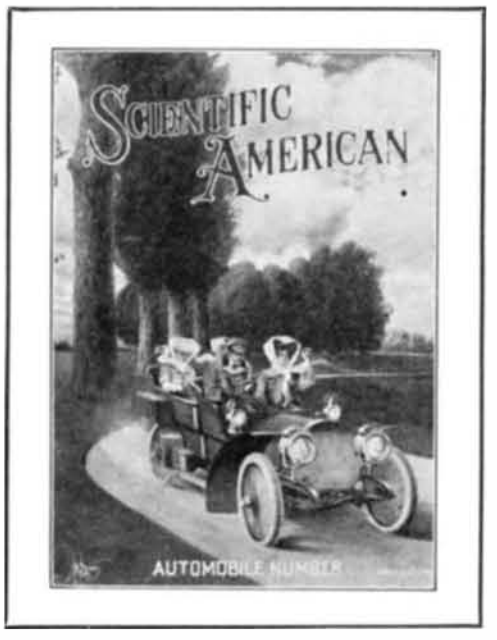

Among its many interesting and instructive articles will be those on Runabouts, Air-cooled Cars, Light and Heavy Water-cooled Cars, Automobile Novelties. Only new models and new mechanical contrivances will be described. The number will be lavishly illustrated. Order from your newsdealer or from

MUNN & CO., 361 Broadway, New York City

DON'T BUY GASOLINE ENGINES

UNTIL YOU INVESTIGATE "THE MASTER WORKMAN."

all one-cylinder engines; revolutionizing gas power. Costs Less to Buy and Less to Run. Quickly, easily started. No vibration. Can be mounted on any wagon at small cost—portable, stationary or traction. Mention this paper. SEND FOR CATALOGUE. **THE TEMPLE PUMP CO., Mfrs., Meagher & 15th Sts., Chicago.** a two-cylinder gasoline engine superior to THIS IS OUR FIFTY-SECOND YEAR.

New York Belting and Packing Co.

LIMITED

Manufacturers of High Grade

Rubber Belting

Diaphragms, Dredging Sleeves, Emery Wheels; Air Brake, Steam, Suction and Garden Hose, etc., Mats, Matting, Interlocking Rubber Tiling. Also manufacturers of moulded and special rubber goods of every description.

Write for catalogue.

91-93 Chambers St., New York

To INVESTIGATE



The mechanically correct DURYEA, invariably is to purchase. **Duryeas** are different is the reason. Patented features make them for Comfort and Economy Supreme. Send for leaflet it Tells the Reason Why.

DURYEA POWER CO., 44-84 Aeyrud St., Reading, Pa.



CHARTER

Stationaries, Portables, Hoisters, Pumpers, Sawing and Boat Outfits, Combined with Dynamos.

Gasoline, Gas, Kerosene.

Send for Catalogue.

State Power Needs.

CHARTER GAS ENGINE CO., Box 148, STERLING, ILL.

Scales All varieties at lowest prices. Best Railroad Track and Wagon or Stock Scales made. Also 1000 useful articles, including Safes, Sewing Machines, Bicycles, Tools, etc. Save Money Lists Free. CHICAGO SCALE CO., Chicago, Ill.

What Is Daus' Tip-Top?

TO PROVE that Daus' "Tip-Top" is the best and simplest device for making **100 copies** from pen-written and **50 copies** from typewritten original, we will ship complete duplicator, cap size, **without deposit**, on **ten (10) days' trial.**

Price $7.50 less trade discount of 33⅓ per cent. or $5 Net

The Felix A. B. Daus Duplicator Co., Daus Bldg., 111 John St., New York

Bausch & Lomb Microscopes

This is an invitation to send for our illustrated catalog of Microscopes if you are interested in best instruments for the least money, those that are used in the leading laboratories everywhere and by individual workers who know the best.

Bausch & Lomb Optical Co.

MANUFACTURERS

ROCHESTER, N. Y.

NEW YORK CHICAGO BOSTON

SAN FRANCISCO FRANKFORT A-M GERMANY



The Wonder Gasoline Motors

Something New and Up-to-date

More power for less money than any other machine on the market. No valves, gears, etc., to get out of order. Jump Spark. Our 1½ H. P. marine outfit is a "WINNER." Solid or reversing propeller. Our prices will surprise you. Write to-day. Marine or stationary outfits to suit any requirements up to 5 H. P.

The R. M. Cornwell Co., 406 S. Salina St., SYRACUSE, N. Y.

MAGIC LANTERNS

Stereopticons and Moving Picture Machines —all sizes, all prices. Views illustrating timely subjects. Fine thing for Church and Home Entertainments. Men with small capital make money giving public exhibitions. Illustrated catalogue free.

McALLISTER, MFG. OPTICIAN, 49 Nassau St., New York.

Perhaps You Want To Know

something about a particular Tool, or Tools. This 950 page, cloth-bound **Tool Catalogue No. 22** tells you all you need to know about every tool made with illustrations of each. It will be sent to your address postpaid for $1.00 which you will get back from the first $10.00 purchase you make from us. Write for it to-day.

MONTGOMERY & CO.

105 Fulton St, N. Y. City

JESSOP STEEL CO.

MFRS OF CRUCIBLE SHEET STEEL

WASHINGTON, PA.

"A-C" Superb HOLIDAY GIFTS for Gentlemen "A-C"

ANTI-CANCER. The first pipe ever known to win the unqualified endorsement of Physicians and the Scientific world **ANTI-CANCER.**

$2.00
10s. 6d.
Registered Mail Postpaid

Imported Briar
Sterling Silver
Vulcanite

7 out of 10 Orders from Old Customers

$1000
Guarantee Against Burnt Tongue

Improved 1906 model now on the market. No advance in price till after holidays.

Saliva Cannot Possibly Enter Stem

NOT A COMPETITOR WITH CHEAP PIPES

Illustrated book full of matter important to smokers free on application

Do not send stamps for postage

THE "A-C" PIPE CO., 807 Times Bldg., Broadway & 42d St., New York



STEAM HAMMERS

ALL TYPES AND SIZES FROM 250 TO 12,000. GENERAL ROLLING MILL MACHINERY, SHEET AND PLATE SHEARS, GALVANIZING PLANTS, CORRUGATING MACHINERY. SEND FOR CATALOGUE.

ERIE FOUNDRY CO.
ERIE, PA.



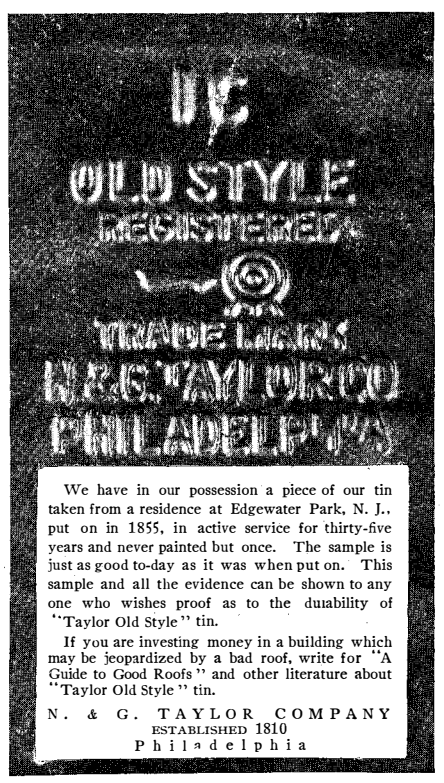

We have in our possession a piece of our tin taken from a residence at Edgewater Park, N. J., put on in 1855, in active service for thirty-five years and never painted but once. The sample is just as good to-day as it was when put on. This sample and all the evidence can be shown to any one who wishes proof as to the duability of "Taylor Old Style" tin.

If you are investing money in a building which may be jeopardized by a bad roof, write for "A Guide to Good Roofs" and other literature about "Taylor Old Style" tin.

N. & G. TAYLOR COMPANY
ESTABLISHED 1810
Philadelphia

Good Points in the Smith Premier

First Point: The Smith Premier typewriter has a complete key-board—a key for every character. No lost time, no wasted energy, no mistakes or misplaced letters. Each key writes one letter on the line.

THE SMITH PREMIER TYPEWRITER COMPANY
Syracuse, N. Y. Branch Stores Everywhere

Power



I.H.C. Gasoline Engines

will be found the very best and the most economical for use in

Blacksmith Shops, Repair Shops, Small Machine Shops, Private Work Shops, Experimental Plants, Manual Training and Industrial Schools, Private Water Supply, etc.

Suitable also for all kinds of pumping. They are **strong, simple, highly efficient** and easy to operate. They are economic of fuel and develop the maximum of horse power at the minimum cost. They require but little room and no piping. Variety of sizes and styles: **Horizontal—6, 8, 10, 12, 15 Horse Power. Vertical—2, 3, 5 Horse Power.** You should know more about the "I. H. C." engines before investing. Do not, therefore, buy an engine of any kind before seeing our catalog. Write to-day. We will mail it promptly.

International Harvester Company of America
(Incorporated)
7 C Monroe Street, Chicago, Ill.

NEW ERA FUEL SAVER



For the Furnace or Boiler

It will save more than its cost this Winter because it cuts one-third from your coal bills and thoroughly heats rooms your furnace now fails to heat without extra expense. Saves the heat which ordinarily goes out of the chimney. Requires no further attention when once installed, and every householder who heats by furnace or boiler should ask their dealer about the NEW ERA, or write for full particulars to

WILMOT CASTLE CO.
17A Elm St., Rochester, N.Y.

We also make Radiators for Stove Pipes, etc.

BACKUS

GAS & GASOLINE ENGINE

Simple, Economical, Durable
Suitable for all kinds of work

BACKUS WATER MOTOR, cheapest power known

Write for circular and prices

BACKUS WATER MOTOR CO., Newark, N. J., U.S.A.

Deafness Cured at Home

Don't waste your time and money in experiments. My method cures deafness and all head noises **to stay cured.** Absolute and positive proofs sent on application. **No pain,** no loss of time. The method is my own and cannot be obtained elsewhere, it has been tried and found true, **it cures.**

Write today for my book, "Deafness its Cause and Cure." FREE. Address

GUY CLIFFORD POWELL, M.D. ***365 Bank Bldg., Peoria, Ill.***

COLD GALVANIZING.

AMERICAN PROCESS. NO ROYALTIES.
SAMPLES AND INFORMATION ON APPLICATION.



NICKEL AND Electro-Plating
Apparatus and Material.
THE
Hanson & VanWinkle Co.,
Newark, N. J.
92 William St., N. Y.
30 & 32 S. Canal St. Chicago.

Glue Without a Brush

What do you think of Dennison's new way—glue, paste and mucilage in air tight tubes! Pull out the pin, and squeeze out just what you require. Apply direct from the tube with the metal spreader. Put the pin back and we guarantee you will find the contents just as good next time, next year, next generation. Dennison's Patent Pin Tube is used exclusively for

Dennison's Glue, Paste and Mucilage

If Dennison's Adhesives are not for sale at your dealer's, a Patent Pin Tube of Glue, Paste or Mucilage will be mailed on receipt of 10 cents. Please address Dept. 26 at our nearest store.

Dennison Manufacturing Company, The Tag Makers.
Boston, 26 Franklin St. New York, 15 John St. Philadelphia, 1007 Chestnut St. Chicago, 128 Franklin St. St. Louis, 413 North 4th St.

$10 AND UP

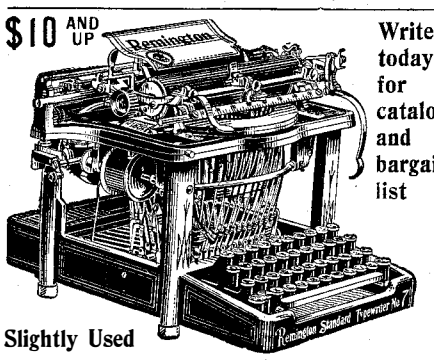

Write today for catalog and bargain list

Slightly Used

TYPEWRITERS

AT LESS THAN HALF PRICE

Thousands of machines, **all leading makes,** in use only long enough to insure smooth running adjustment, $10 to $55. We are the largest handlers of slightly-used typewriters in the world and offer guaranteed rare bargains such as no other house can approach.

SPECIAL 2300 *absolutely new* **Visible Sholes** machines built to sell for **$100**—our price while they last, **$45.**

Machines shipped for your examination and approval to any point in United States.

We rent all makes of machines at $3.00 a month and up.

FREE Send today for our big catalog list of rare typewriter bargains. **Don't buy until you see it.** Write today before our big clearing sale closes. Special offer to agents.

BIG DISCOUNT ON TYPEWRITER SUPPLIES.

ROCKWELL-BARNES COMPANY
559 BALDWIN BUILDING, CHICAGO, ILL.

Fasten your papers together securely by using Washburne's Patent Adjustable

"O.K." PAPER FASTENERS

The **"O. K."** has the **advantage of a piercing point,** which penetrates every sheet and holds them together with a **bull-dog grip.** They are **handsome, compact, strong, always ready for use,** require no machine for putting them on or taking them off, and **they always work. Made in three sizes,** and put up in **brass boxes** of 100 fasteners each. **At all stationers. Liberal discount to the trade. Send 10 cents for box of fifty assorted sizes.** Booklet free.

JAMES V. WASHBURNE, Mfr.
210 E. Genesee St., Syracuse, N.Y.

DON'T WASTE TIME

Have your regular 'phone correspondents in a bunch for quick and easy reference. Get the

Automatic Telephone Card Index



which can be attached to your 'phone in a minute. Has enough space for the names of 170 firms, alphabetically arranged in a handsome aluminum case. The cards are quickly removed and are *out of sight,* except when you want them. Cards plainly indexed. Pull out the *letter* you want. When through, let go and it returns to its place automatically. Splendid advertising scheme to give to customers. Name and business printed on both sides, in quantities.

Price 50 Cents, sent postpaid.

AUTOMATIC CARD INDEX CO.
Dept. A, 327-331 Bleecker St., Utica, N. Y.



Motion Picture

MACHINES and FILMS
STEREOPTICONS and SLIDES

For Public Entertainments, in Theatres, Halls, Show Tents, etc.

Catalogue No. 9 Free

KLEINE OPTICAL CO., 52 State St., Chicago, Ill.

HELMET OIL LUBRICATES ANYTHING

IF YOU HAVE A HOT BOX TRY IT. C. H. BESLY & CO. CHICAGO, ILL. U.S.A.

15 to 21 South Clinton Street.